

Photometric test report

Family
Silica® 21 round M

Order number: 51ME61DB3NWA
EAN: 4069025800961

LP number
60071_8

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 3000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 5060 lm
Power consumption = 33.3 W
Luminous efficacy = 152 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

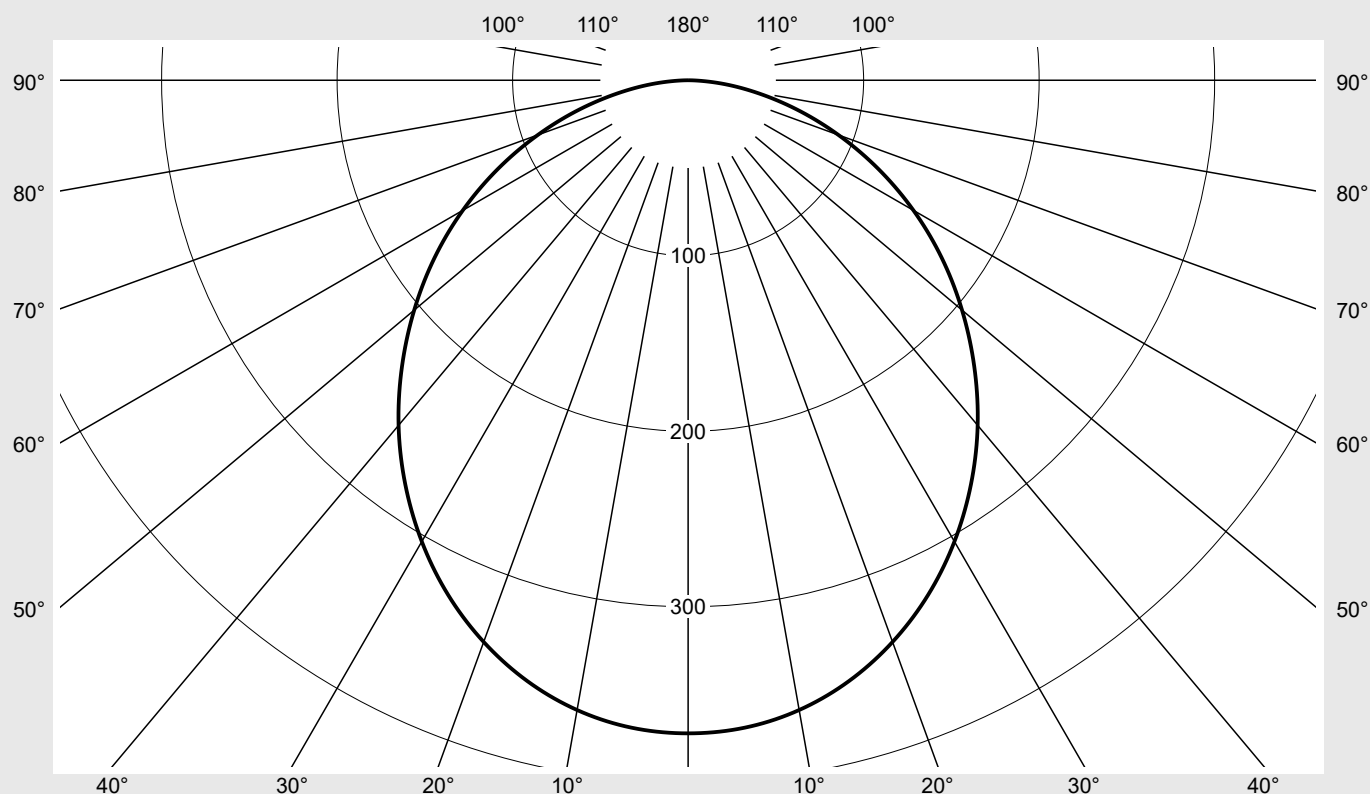

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME61DB3NWA EAN: 4069025800961	LP number 60071_8
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51ME61DB3NWA EAN: 4069025800961							LP number 60071_8	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 586
C-planes	0°		
γ	Luminance in cd/m²		
45°	6117.2		
50°	5946.5		
55°	5769.9		
60°	5562.2		
65°	5309.9		
70°	4999.4		
75°	4626.8		
80°	4152.7		
85°	3547.3		

Photometric test report

Family Silica® 21 round M	Order number: 51ME61DB3NWA EAN: 4069025800961	LP number 60071_8
--	--	------------------------------------

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

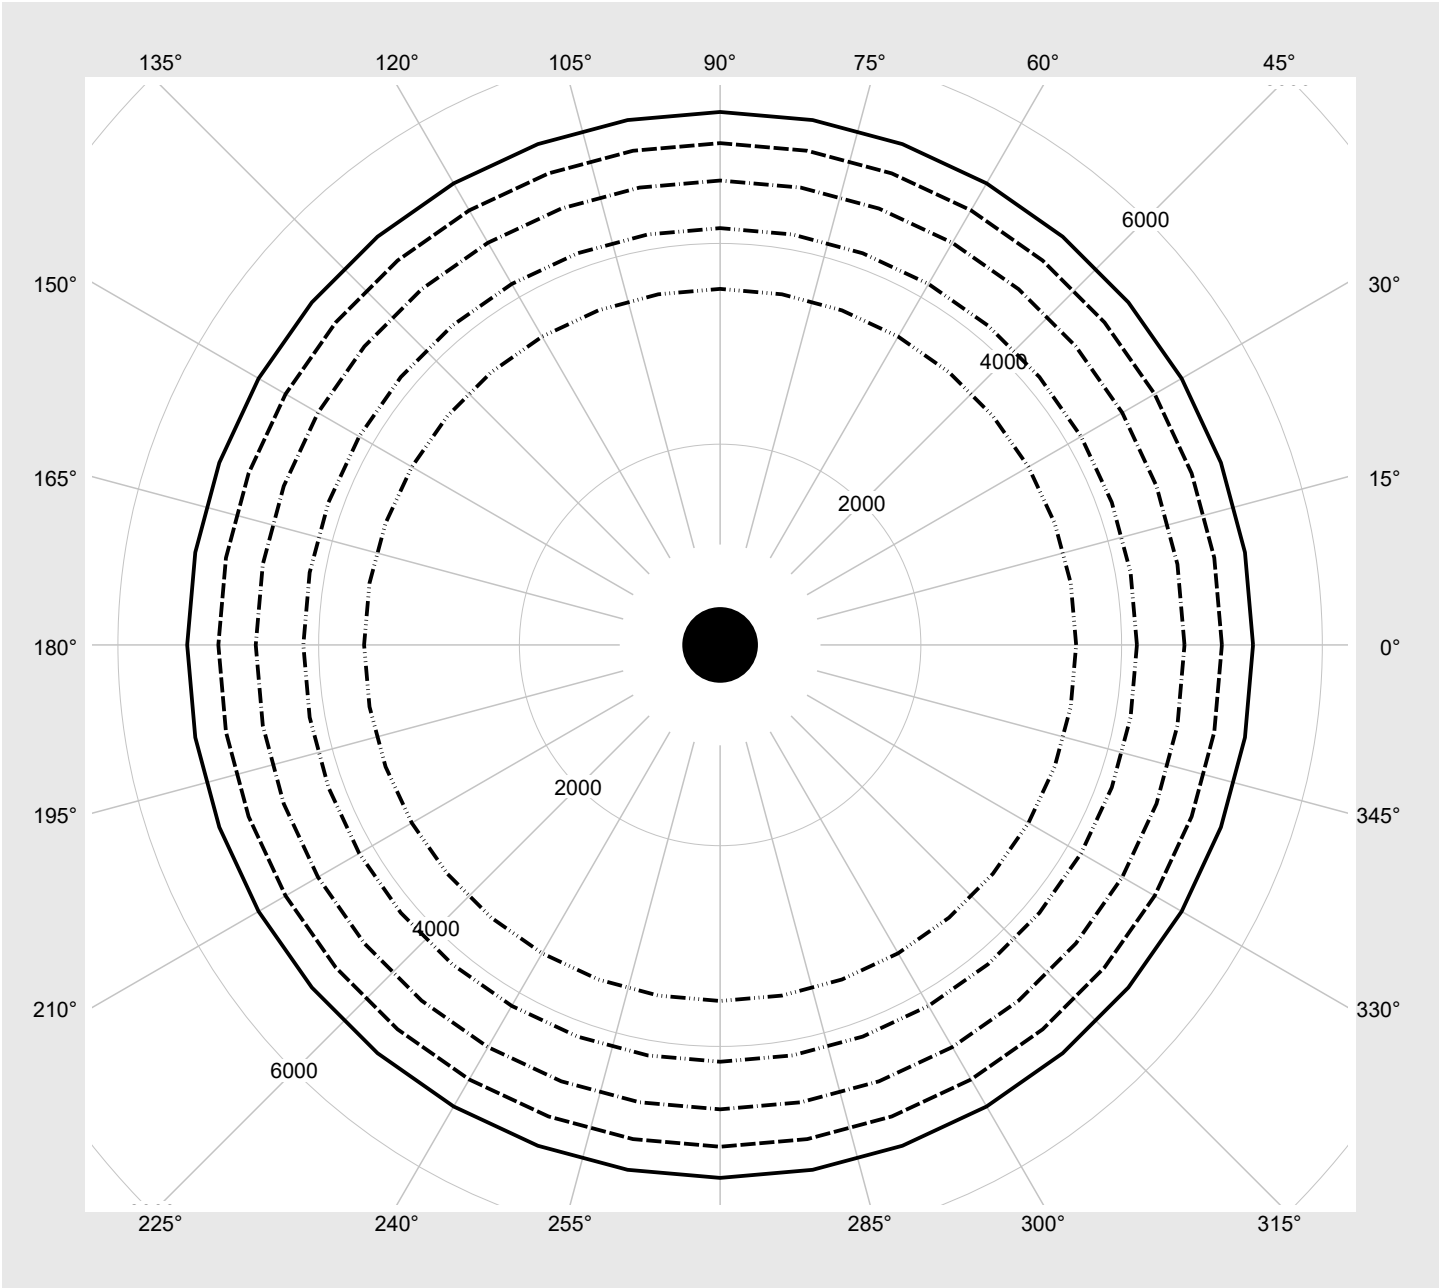

Photometric test report

Family Silica® 21 round M	Order number: 51ME61DB3NWA EAN: 4069025800961	LP number 60071_8
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5060	33.3
95	241	252	4803	31.7
90	228	250	4546	30.0
85	216	248	4308	28.5
80	203	246	4050	27.0
75	190	243	3791	25.2
70	177	241	3532	23.6
65	165	238	3291	22.2
60	152	235	3031	20.5
55	140	232	2791	19.0
50	127	229	2529	17.3
45	115	225	2287	15.9
40	102	221	2025	14.3
35	89	216	1761	12.8
30	77	210	1518	11.4
25	65	204	1274	9.9
20	52	196	1010	8.3
15	40	186	766	6.6
10	27	172	501	4.7
5	15	150	256	3.3
1	6	117	72	2.1