

## Photometric test report

**Family**  
**Silica® 21 round L**

**Order number: 51ME61DC4NBA**  
**EAN: 4069025805058**

**LP number**  
**60071\_33**

**serial**  
**documentation**  
**20.05.2026**

**siteco**



**Version**

surface-mounted luminaire, housing, black,  
cover, opal, direct extremely wide distribution,  
UGR≤22

**Lamps**

LED 4000 K | CRI ≥ 80

**Controlgear**

ECG-DALI

**Rated values**

Net luminous flux = 11550 lm


Power consumption = 73.2 W

Luminous efficacy = 157.8 lm/W

**Luminous intensity in cd/klm**

**C180-0**

**Imax: 372 cd/klm**

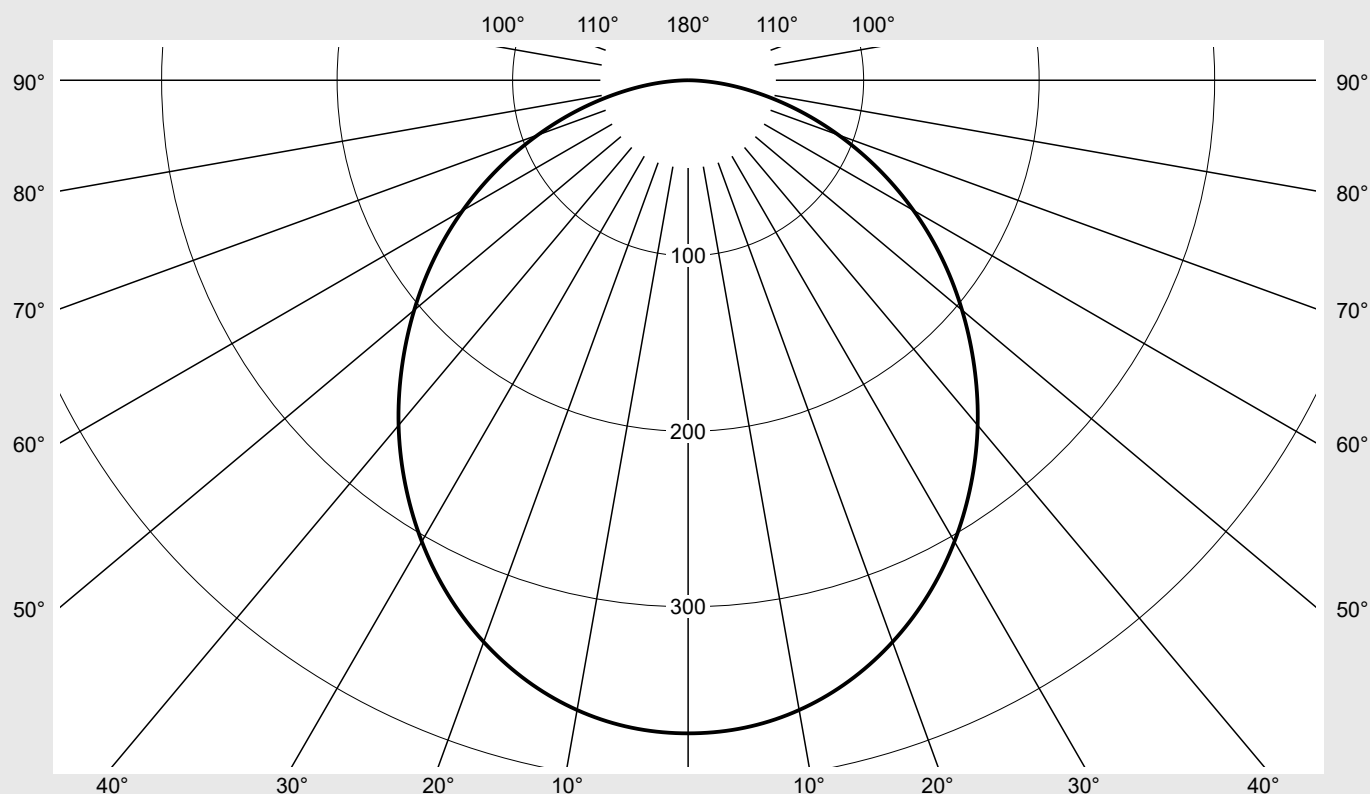

**Classifications**

DIN 5040 A 4 0  
CIE N1=49 N2=79 N3=96  
N4=100 N5=100

**Luminaire light output ratios**

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

**Measurement conditions**

DIN EN 13032 and DIN 5032

Photometric test report

|                                          |                                                  |                            |
|------------------------------------------|--------------------------------------------------|----------------------------|
| Family<br>Silica® 21 round L             | Order number: 51ME61DC4NBA<br>EAN: 4069025805058 | LP number<br>60071_33      |
| Table of values for luminous intensities |                                                  | Maximum luminous intensity |

siteco

| C-planes | 0°                           | Phi-zone | Total<br>Phi-zone       |
|----------|------------------------------|----------|-------------------------|
| γ        | Luminous intensity in cd/klm |          | Luminous flux in lm/klm |
| 0°       | 372.1                        | 2.2      | 2.2                     |
| 5°       | 370.3                        | 17.7     | 19.9                    |
| 10°      | 364.3                        | 34.7     | 54.6                    |
| 15°      | 354.3                        | 50.3     | 104.9                   |
| 20°      | 340.6                        | 63.8     | 168.7                   |
| 25°      | 323.6                        | 75.0     | 243.7                   |
| 30°      | 303.5                        | 83.2     | 326.8                   |
| 35°      | 281.0                        | 88.3     | 415.2                   |
| 40°      | 256.7                        | 90.4     | 505.6                   |
| 45°      | 230.6                        | 89.4     | 595.0                   |
| 50°      | 203.7                        | 85.5     | 680.5                   |
| 55°      | 176.4                        | 79.2     | 759.7                   |
| 60°      | 148.2                        | 70.4     | 830.1                   |
| 65°      | 119.6                        | 59.4     | 889.5                   |
| 70°      | 91.1                         | 46.9     | 936.5                   |
| 75°      | 63.8                         | 33.8     | 970.3                   |
| 80°      | 38.4                         | 20.7     | 991.0                   |
| 85°      | 16.5                         | 9.0      | 1000.0                  |
| 90°      | 0.0                          | 0.0      | 1000.0                  |
| 95°      | 0.0                          | 0.0      | 1000.0                  |
| 100°     | 0.0                          | 0.0      | 1000.0                  |
| 105°     | 0.0                          | 0.0      | 1000.0                  |
| 110°     | 0.0                          | 0.0      | 1000.0                  |
| 115°     | 0.0                          | 0.0      | 1000.0                  |
| 120°     | 0.0                          | 0.0      | 1000.0                  |
| 125°     | 0.0                          | 0.0      | 1000.0                  |
| 130°     | 0.0                          | 0.0      | 1000.0                  |
| 135°     | 0.0                          | 0.0      | 1000.0                  |
| 140°     | 0.0                          | 0.0      | 1000.0                  |
| 145°     | 0.0                          | 0.0      | 1000.0                  |
| 150°     | 0.0                          | 0.0      | 1000.0                  |
| 155°     | 0.0                          | 0.0      | 1000.0                  |
| 160°     | 0.0                          | 0.0      | 1000.0                  |
| 165°     | 0.0                          | 0.0      | 1000.0                  |
| 170°     | 0.0                          | 0.0      | 1000.0                  |
| 175°     | 0.0                          | 0.0      | 1000.0                  |
| 180°     | 0.0                          | 0.0      | 1000.0                  |

Photometric test report

|                              |     |                     |                                                  |      |      |      |                    |      |      |                       |      |
|------------------------------|-----|---------------------|--------------------------------------------------|------|------|------|--------------------|------|------|-----------------------|------|
| Family<br>Silica® 21 round L |     |                     | Order number: 51ME61DC4NBA<br>EAN: 4069025805058 |      |      |      |                    |      |      | LP number<br>60071_33 |      |
| UGR-Table                    |     |                     | Standard room                                    |      |      |      |                    |      |      | siteco                |      |
| Reflection factor of ceiling | 0.7 | 0.7                 | 0.5                                              | 0.5  | 0.3  | 0.7  | 0.7                | 0.5  | 0.5  | 0.3                   |      |
| Reflection factor of walls   | 0.5 | 0.3                 | 0.5                                              | 0.3  | 0.3  | 0.5  | 0.3                | 0.5  | 0.3  | 0.3                   |      |
| Reflection factor of floor   | 0.2 | 0.2                 | 0.2                                              | 0.2  | 0.2  | 0.2  | 0.2                | 0.2  | 0.2  | 0.2                   |      |
| Room dimensions              |     | View crosswise (C0) |                                                  |      |      |      | View endwise (C90) |      |      |                       |      |
| x                            | y   |                     |                                                  |      |      |      |                    |      |      |                       |      |
| 2H                           | 2H  | 18.4                | 20.1                                             | 18.7 | 20.4 | 20.7 | 18.4               | 20.1 | 18.7 | 20.4                  | 20.7 |
|                              | 3H  | 20.0                | 21.5                                             | 20.3 | 21.8 | 22.2 | 20.0               | 21.5 | 20.3 | 21.8                  | 22.2 |
|                              | 4H  | 20.6                | 22.0                                             | 21.0 | 22.4 | 22.7 | 20.6               | 22.0 | 21.0 | 22.4                  | 22.7 |
|                              | 6H  | 21.1                | 22.4                                             | 21.5 | 22.7 | 23.1 | 21.1               | 22.4 | 21.5 | 22.7                  | 23.1 |
|                              | 8H  | 21.3                | 22.5                                             | 21.7 | 22.9 | 23.3 | 21.3               | 22.5 | 21.7 | 22.9                  | 23.3 |
|                              | 12H | 21.4                | 22.5                                             | 21.8 | 22.9 | 23.3 | 21.4               | 22.5 | 21.8 | 22.9                  | 23.3 |
| 4H                           | 2H  | 19.1                | 20.6                                             | 19.5 | 20.9 | 21.3 | 19.1               | 20.6 | 19.5 | 20.9                  | 21.3 |
|                              | 3H  | 20.9                | 22.1                                             | 21.3 | 22.5 | 22.9 | 20.9               | 22.1 | 21.3 | 22.5                  | 22.9 |
|                              | 4H  | 21.6                | 22.7                                             | 22.1 | 23.1 | 23.6 | 21.6               | 22.7 | 22.1 | 23.1                  | 23.6 |
|                              | 6H  | 22.2                | 23.2                                             | 22.7 | 23.6 | 24.1 | 22.2               | 23.2 | 22.7 | 23.6                  | 24.1 |
|                              | 8H  | 22.4                | 23.3                                             | 22.9 | 23.8 | 24.2 | 22.4               | 23.3 | 22.9 | 23.8                  | 24.2 |
|                              | 12H | 22.6                | 23.4                                             | 23.1 | 23.8 | 24.3 | 22.6               | 23.4 | 23.1 | 23.8                  | 24.3 |
| 8H                           | 4H  | 22.0                | 22.8                                             | 22.4 | 23.3 | 23.8 | 22.0               | 22.8 | 22.4 | 23.3                  | 23.8 |
|                              | 6H  | 22.7                | 23.4                                             | 23.2 | 23.9 | 24.4 | 22.7               | 23.4 | 23.2 | 23.9                  | 24.4 |
|                              | 8H  | 23.0                | 23.6                                             | 23.5 | 24.1 | 24.6 | 23.0               | 23.6 | 23.5 | 24.1                  | 24.6 |
|                              | 12H | 23.2                | 23.7                                             | 23.7 | 24.2 | 24.8 | 23.2               | 23.7 | 23.7 | 24.2                  | 24.8 |
| 12H                          | 4H  | 22.0                | 22.8                                             | 22.5 | 23.3 | 23.7 | 22.0               | 22.8 | 22.5 | 23.3                  | 23.7 |
|                              | 6H  | 22.8                | 23.4                                             | 23.3 | 23.9 | 24.4 | 22.8               | 23.4 | 23.3 | 23.9                  | 24.4 |
|                              | 8H  | 23.1                | 23.6                                             | 23.6 | 24.1 | 24.7 | 23.1               | 23.6 | 23.6 | 24.1                  | 24.7 |

| Luminance table |                    | Max. for $\gamma \geq 65^\circ$ | Photometric dimensions in mm: | D = 886 |
|-----------------|--------------------|---------------------------------|-------------------------------|---------|
| C-planes        |                    | 0°                              |                               |         |
| $\gamma$        | Luminance in cd/m² |                                 |                               |         |
| 45°             | 6108.2             |                                 |                               |         |
| 50°             | 5937.7             |                                 |                               |         |
| 55°             | 5761.4             |                                 |                               |         |
| 60°             | 5554.0             |                                 |                               |         |
| 65°             | 5302.1             |                                 |                               |         |
| 70°             | 4992.0             |                                 |                               |         |
| 75°             | 4620.0             |                                 |                               |         |
| 80°             | 4146.6             |                                 |                               |         |
| 85°             | 3542.1             |                                 |                               |         |

Photometric test report

Family  
Silica® 21 round L

Order number: 51ME61DC4NBA  
EAN: 4069025805058

LP number  
60071\_33

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

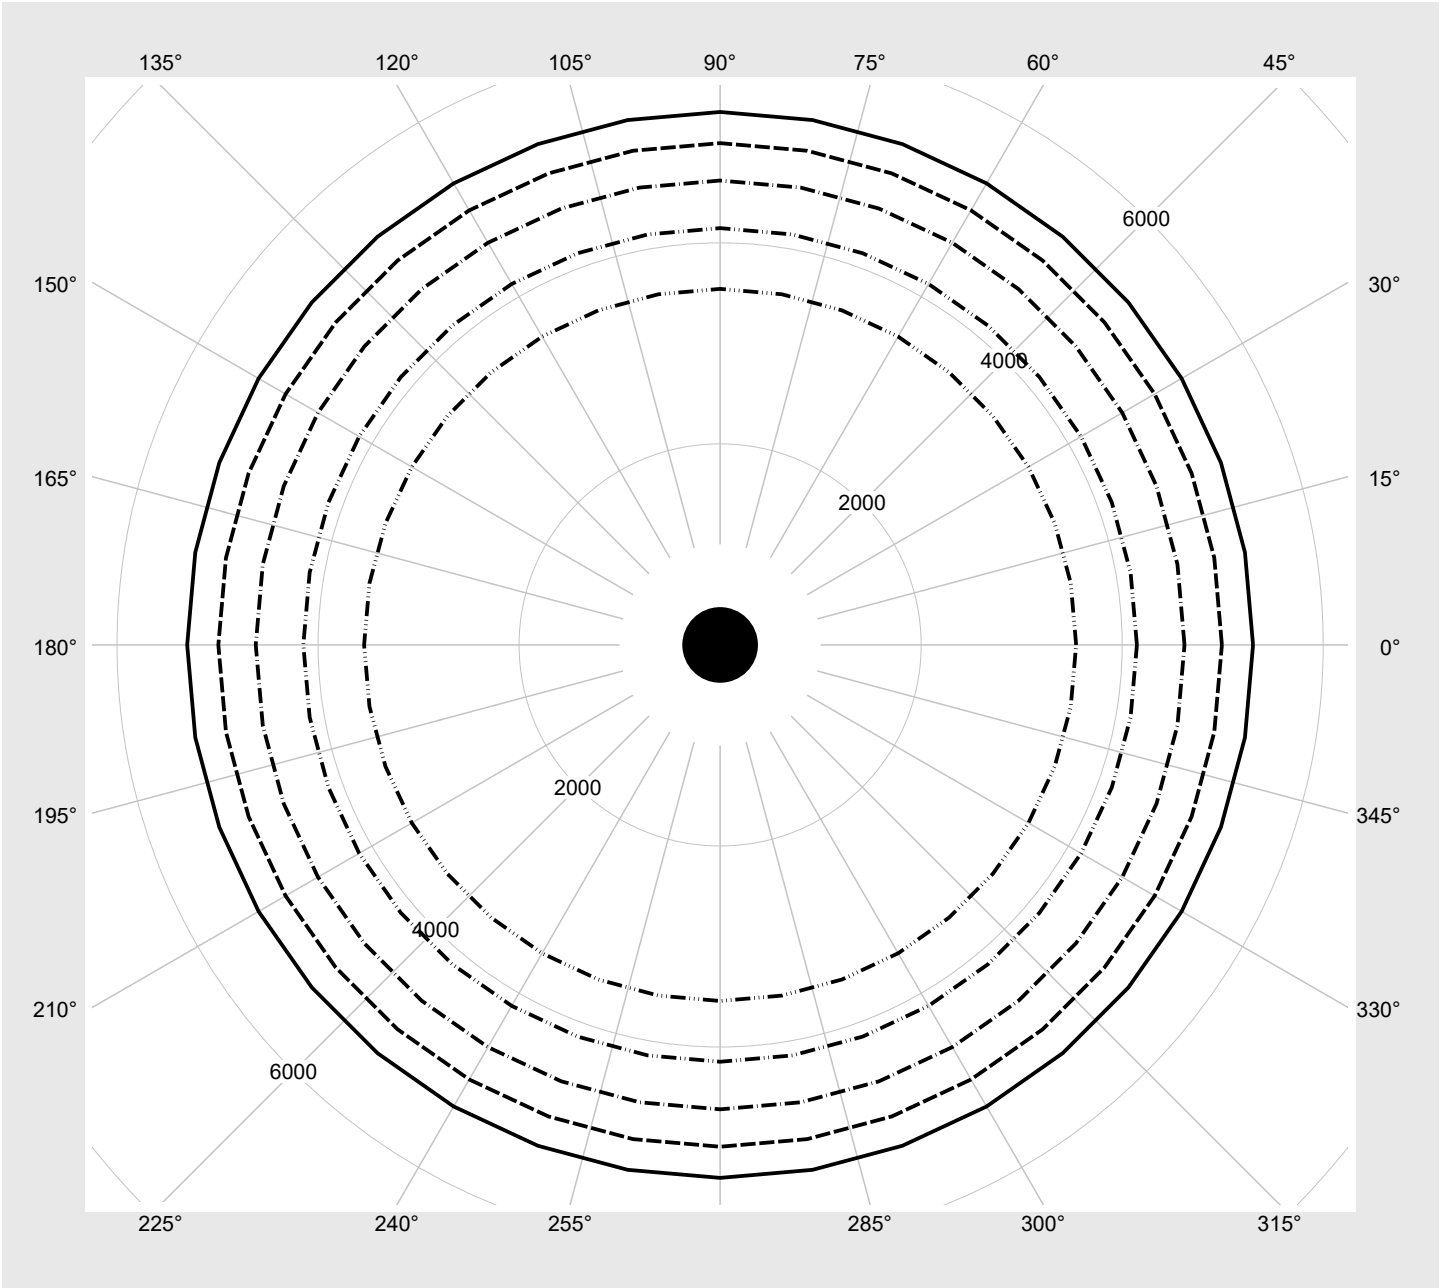

Photometric test report

|                                                                        |                                                                |                                                                                     |
|------------------------------------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Family</b><br><b>Silica® 21 round L</b>                             | <b>Order number: 51ME61DC4NBA</b><br><b>EAN: 4069025805058</b> | <b>LP number</b><br><b>60071_33</b>                                                 |
| <b>Dimming levels table</b> <div>environmental temperature: 25°C</div> |                                                                |  |

| Luminous flux [%] | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] |
|-------------------|----------------------|---------------------------|--------------------|-----------------------|
| 100               | 254                  | 254                       | 11550              | 73.2                  |
| 95                | 241                  | 252                       | 10965              | 69.4                  |
| 90                | 228                  | 250                       | 10379              | 65.7                  |
| 85                | 216                  | 248                       | 9836               | 62.3                  |
| 80                | 203                  | 246                       | 9247               | 58.8                  |
| 75                | 190                  | 243                       | 8656               | 55.1                  |
| 70                | 177                  | 241                       | 8064               | 51.4                  |
| 65                | 165                  | 238                       | 7516               | 48.1                  |
| 60                | 152                  | 235                       | 6923               | 44.5                  |
| 55                | 140                  | 232                       | 6373               | 41.2                  |
| 50                | 127                  | 229                       | 5777               | 37.5                  |
| 45                | 114                  | 225                       | 5181               | 34.0                  |
| 40                | 102                  | 221                       | 4628               | 30.7                  |
| 35                | 89                   | 216                       | 4028               | 27.1                  |
| 30                | 77                   | 210                       | 3473               | 23.8                  |
| 25                | 64                   | 204                       | 2870               | 20.3                  |
| 20                | 52                   | 196                       | 2314               | 17.2                  |
| 15                | 40                   | 186                       | 1756               | 13.8                  |
| 10                | 27                   | 172                       | 1151               | 10.5                  |
| 5                 | 15                   | 150                       | 591                | 7.2                   |
| 0                 | 3                    | 91                        | 30                 | 3.6                   |