

Photometric test report

Family
Silica® 21 round L

Order number: 51ME61DC4NWA
EAN: 4069025805096

LP number
60071_15

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white,
cover, opal, direct extremely wide distribution,
UGR≤22

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 11550 lm
Power consumption = 70.9 W
Luminous efficacy = 162.9 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

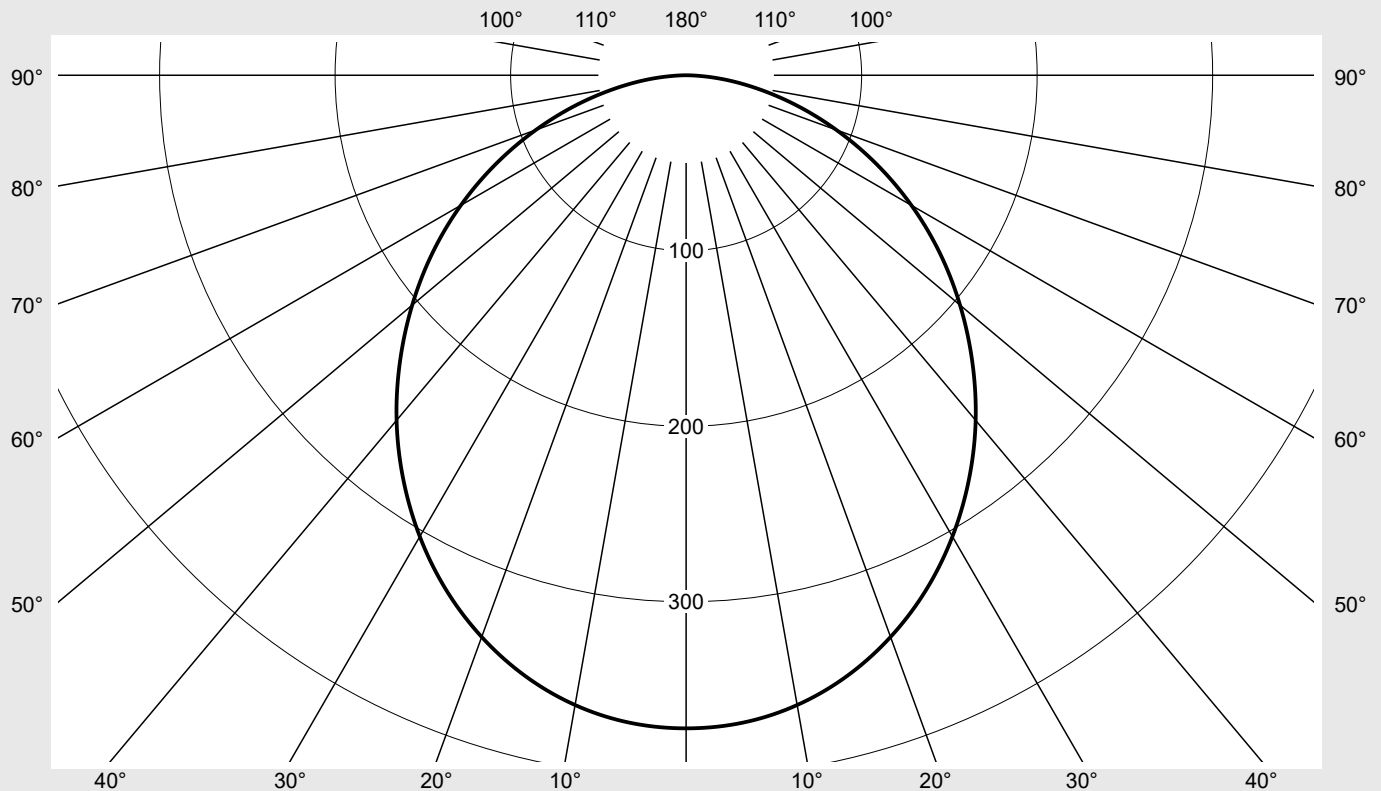

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51ME61DC4NWA EAN: 4069025805096	LP number 60071_15
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round L			Order number: 51ME61DC4NWA EAN: 4069025805096							LP number 60071_15	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 886
C-planes	0°		
γ	Luminance in cd/m²		
45°	6108.2		
50°	5937.7		
55°	5761.4		
60°	5554.0		
65°	5302.1		
70°	4992.0		
75°	4620.0		
80°	4146.6		
85°	3542.1		

Photometric test report

Family
Silica® 21 round L

Order number: 51ME61DC4NWA
EAN: 4069025805096

LP number
60071_15

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

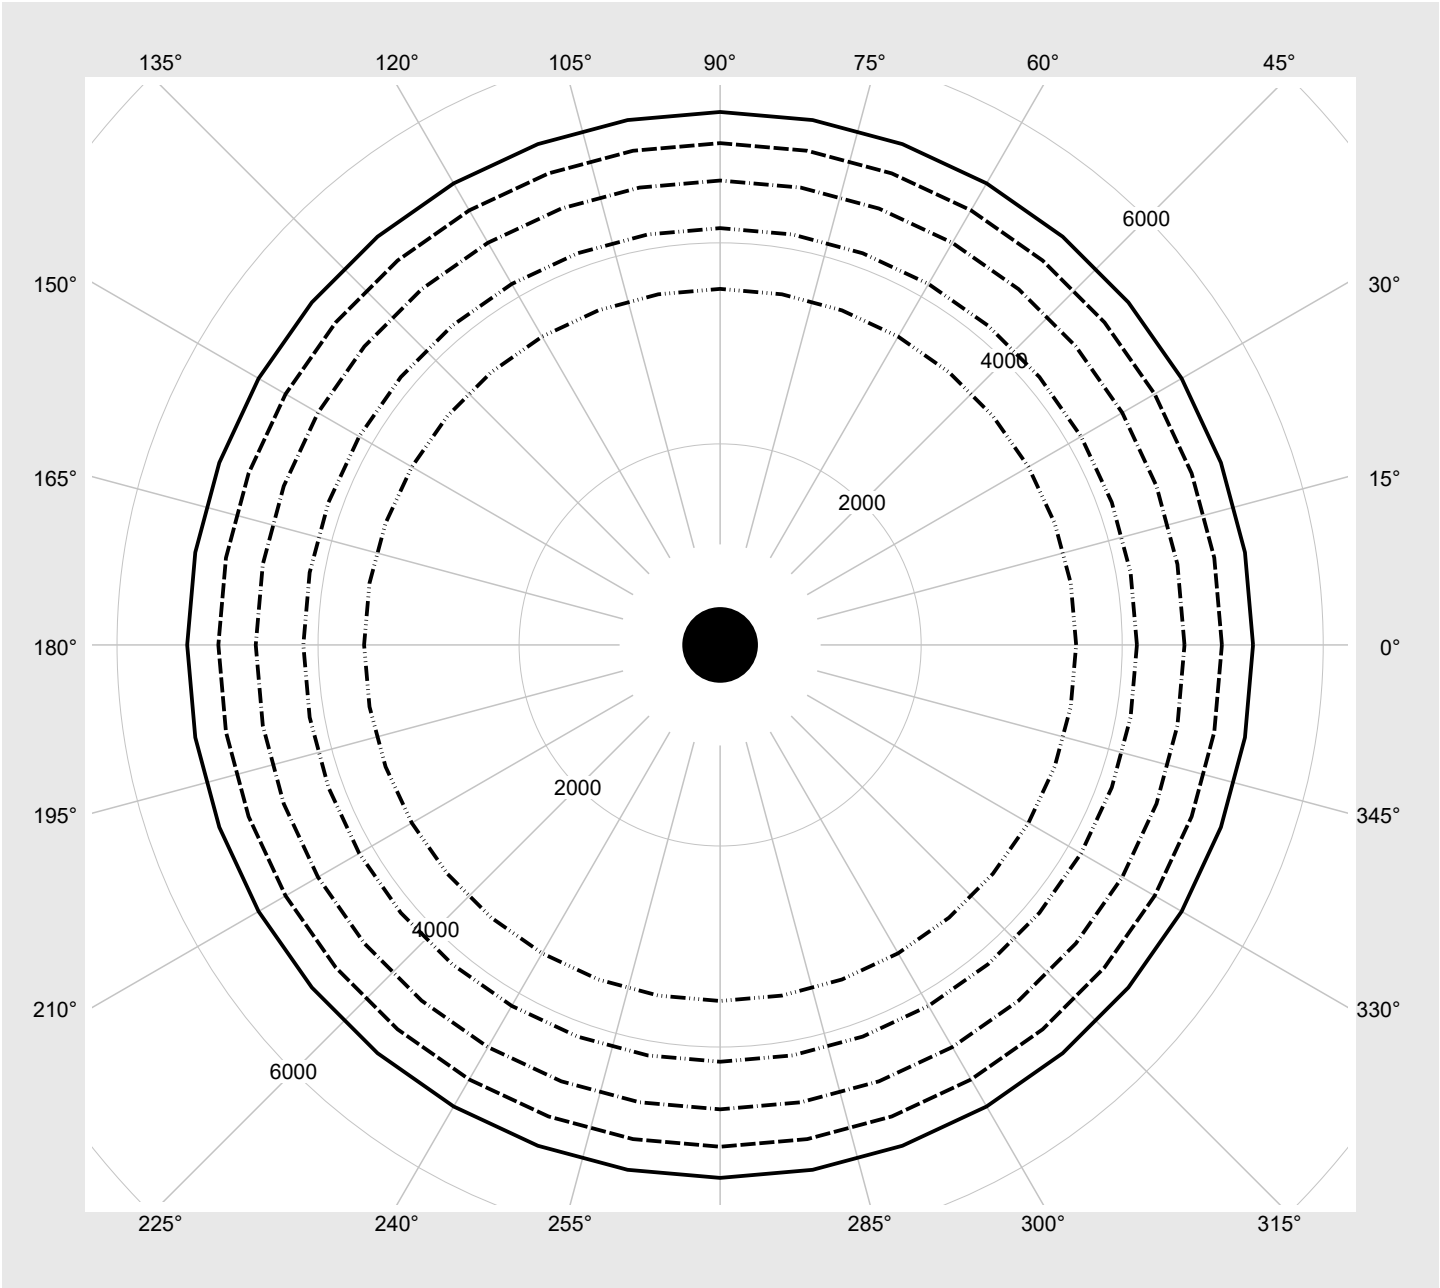

Photometric test report

Family Silica® 21 round L	Order number: 51ME61DC4NWA EAN: 4069025805096	LP number 60071_15
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	11550	70.9
95	241	252	10964	67.3
90	228	250	10376	63.8
85	216	248	9835	60.6
80	203	246	9245	57.0
75	190	243	8654	53.4
70	178	241	8107	50.2
65	165	238	7513	46.7
60	152	235	6919	43.2
55	140	232	6369	39.9
50	127	229	5774	36.5
45	114	225	5176	33.1
40	102	221	4623	29.8
35	89	216	4024	26.4
30	77	210	3469	23.2
25	64	204	2867	19.8
20	52	196	2309	16.7
15	40	186	1752	13.6
10	27	172	1147	10.2
5	15	150	587	7.1
0	3	91	26	3.6