

Photometric test report

Family
Silica® 21 round S

Order number: 51ME63DA3MBA
EAN: 4069025800985

LP number
59826_791

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, black, microprismatic optics, direct wide distribution, UGR≤19

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 2410 lm
Power consumption = 18.7 W
Luminous efficacy = 128.9 lm/W

siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 487 cd/klm



Classifications

DIN 5040 A 5 0
CIE N1=64 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51ME63DA3MBA EAN: 4069025800985	LP number 59826_791
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round S	Order number: 51ME63DA3MBA EAN: 4069025800985	LP number 59826_791
------------------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.2	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.1	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9	20.3
	6H	19.2	20.0	19.6	20.4	20.9	19.1	19.9	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 386	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°					
Luminance in cd/m²							
45°	6888.8	7331.9	7437.7	7294.7	6657.3	7280.5	7314.7
50°	4604.7	5282.7	6167.9	5279.6	4574.2	5198.9	6034.2
55°	3180.7	3633.7	5149.3	3617.8	3151.4	3539.2	5063.8
60°	2324.4	2816.2	4146.3	2847.1	2317.3	2779.2	4195.2
65°	2454.4	2849.2	3035.8	2919.3	2515.7	2920.5	2872.0
70°	2489.7	3035.2	1922.7	3092.0	2503.7	3097.9	1899.3
75°	3109.7	2797.7	2220.6	2858.6	3154.6	2837.2	2035.9
80°	3326.6	2518.8	3287.1	2446.1	3365.0	2567.2	3507.1
85°	3093.6	2893.0	2442.1	2902.4	3076.3	2963.9	2455.8

Photometric test report

Family
Silica® 21 round S


Order number: 51ME63DA3MBA
EAN: 4069025800985

LP number
59826_791

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

siteco

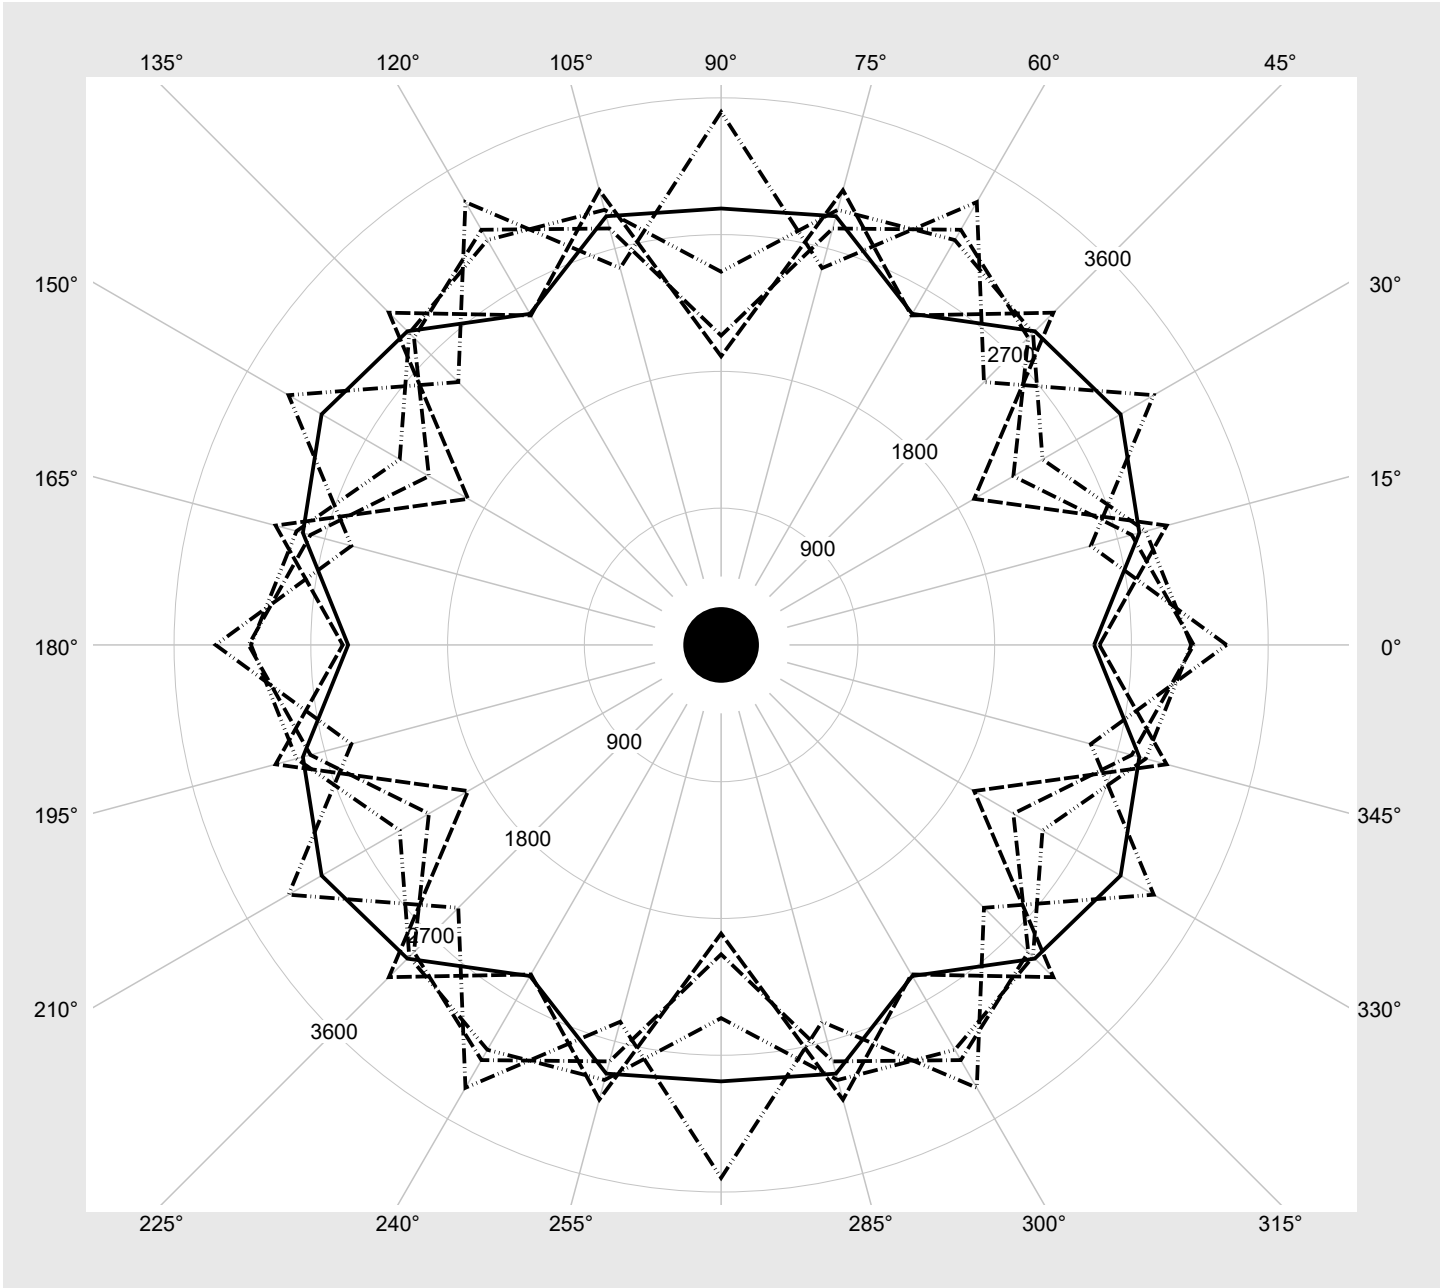

Photometric test report

Family Silica® 21 round S	Order number: 51ME63DA3MBA EAN: 4069025800985	LP number 59826_791
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2410	18.7
95	241	252	2288	17.8
90	228	250	2166	16.9
85	215	248	2044	16.0
80	203	246	1930	15.0
75	190	243	1807	14.1
70	177	241	1683	13.3
65	165	238	1569	12.5
60	152	235	1446	11.6
55	139	232	1321	10.7
50	127	229	1206	9.9
45	114	225	1082	9.0
40	102	221	967	8.1
35	89	216	843	7.2
30	77	210	727	6.4
25	64	204	602	5.5
20	52	196	486	4.5
15	39	185	360	3.6
10	27	172	244	2.7
5	14	148	117	1.5
4	11	139	87	1.2