

Photometric test report

Family
Silica® 21 round M

Order number: 51ME63DB4MSA
EAN: 4069025803450

LP number
59826_816

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, silver,
microprismatic optics, direct wide distribution,
UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 5560 lm
Power consumption = 35.6 W
Luminous efficacy = 156.2 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 487 cd/klm

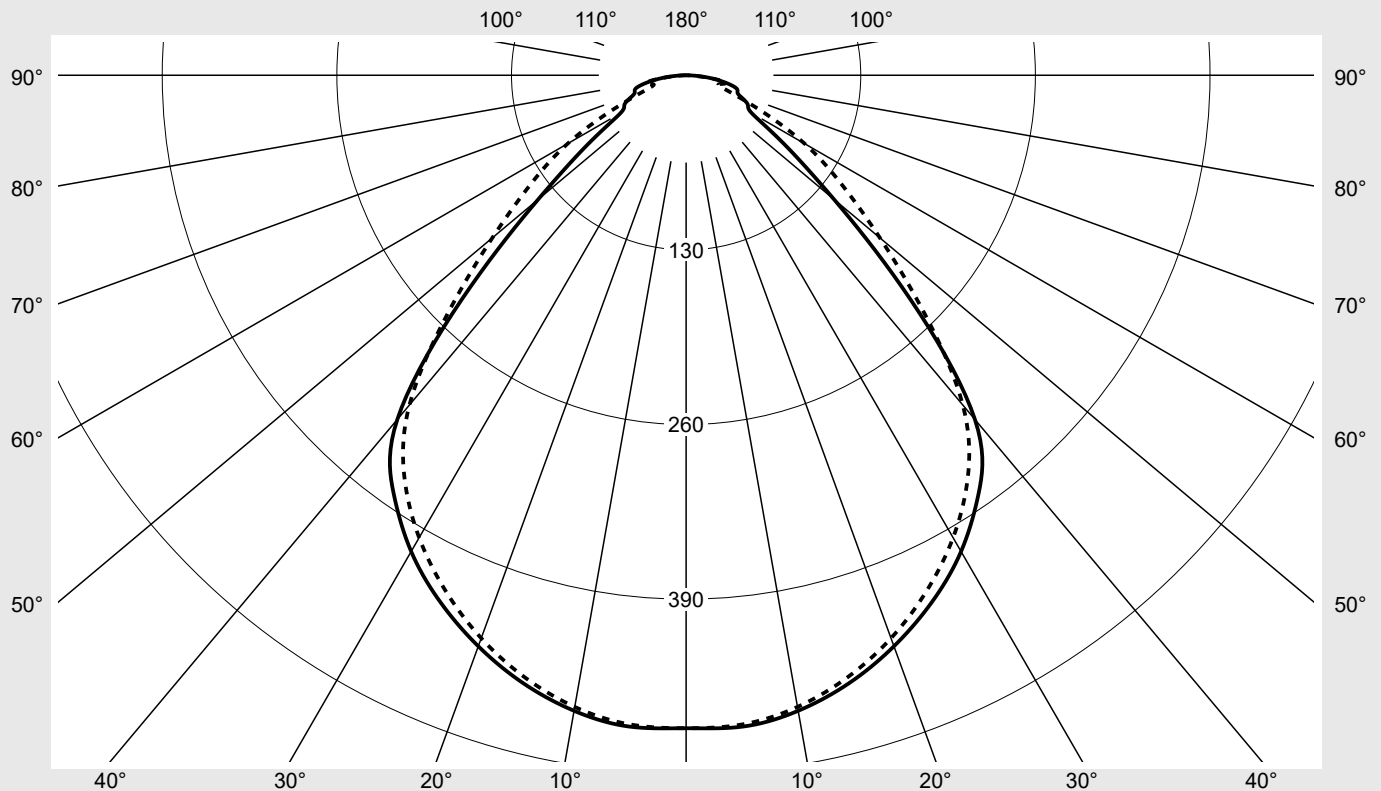

Classifications

DIN 5040 A 5 0
CIE N1=64 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME63DB4MSA EAN: 4069025803450	LP number 59826_816
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51ME63DB4MSA EAN: 4069025803450	LP number 59826_816
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9	20.3
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6895.8	7339.3	7445.2	7302.1	6664.0	7287.8	7322.1
50°	4609.4	5288.0	6174.1	5284.9	4578.8	5204.1	6040.3
55°	3183.9	3637.3	5154.5	3621.4	3154.6	3542.8	5068.9
60°	2326.8	2819.0	4150.5	2850.0	2319.7	2782.0	4199.5
65°	2456.9	2852.1	3038.8	2922.3	2518.2	2923.4	2874.8
70°	2492.3	3038.3	1924.6	3095.1	2506.2	3101.0	1901.3
75°	3112.9	2800.5	2222.8	2861.5	3157.8	2840.1	2038.0
80°	3329.9	2521.3	3290.4	2448.6	3368.4	2569.8	3510.6
85°	3096.7	2895.9	2444.6	2905.3	3079.4	2966.8	2458.3

Photometric test report

Family
Silica® 21 round M

Order number: 51ME63DB4MSA
EAN: 4069025803450

LP number
59826_816

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco



Photometric test report

Family Silica® 21 round M	Order number: 51ME63DB4MSA EAN: 4069025803450	LP number 59826_816
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5560	35.6
95	241	252	5277	33.8
90	228	250	4995	32.0
85	216	248	4734	30.3
80	203	246	4450	28.6
75	190	243	4165	27.0
70	178	241	3903	25.2
65	165	238	3617	23.5
60	152	235	3331	21.8
55	140	232	3066	20.3
50	127	229	2779	18.4
45	114	225	2491	16.7
40	102	221	2225	15.2
35	89	216	1936	13.5
30	77	210	1669	12.0
25	64	204	1380	10.4
20	52	196	1112	8.8
15	40	186	844	6.9
10	27	172	554	5.0
5	15	150	285	3.5
1	6	117	83	2.2