

Photometric test report

Family
Silica® 21 round L

Order number: 51ME63DC3MWA
EAN: 4069025805157

LP number
59826_785

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, microprismatic optics, direct wide distribution, UGR≤19

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 12730 lm
Power consumption = 81.8 W
Luminous efficacy = 155.6 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 487 cd/klm

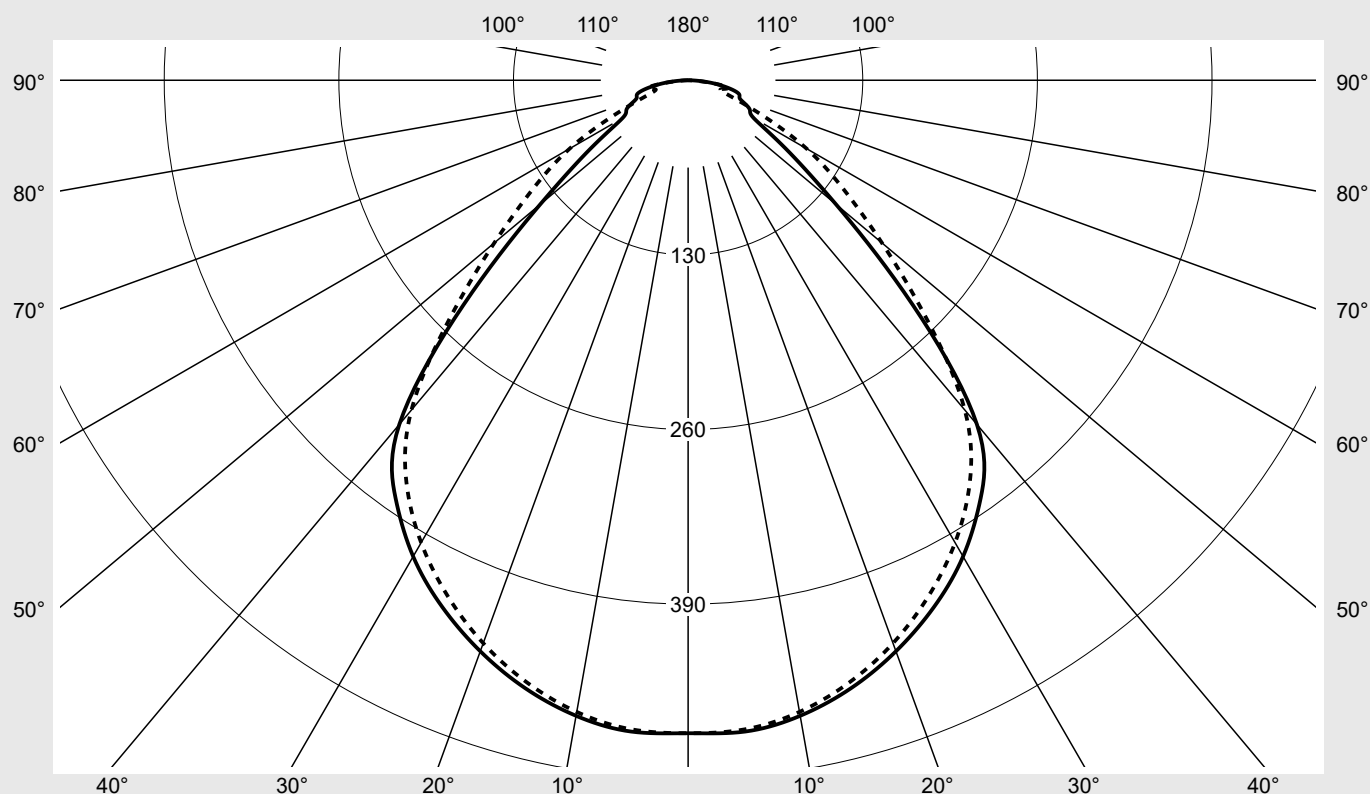

Classifications

DIN 5040 A 5 0
CIE N1=64 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC3MWA EAN: 4069025805157	LP number 59826_785
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC3MWA EAN: 4069025805157	LP number 59826_785
------------------------------	--	------------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9	
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5	
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8	
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2	
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4	
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5	
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0	
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9	
	4H	18.6	19.5	19.0	19.9	20.4	18.6	19.5	19.0	19.9	20.4	
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.8	
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1	
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2	
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5	
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2	
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5	
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8	
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5	
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2	
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6	

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 886	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°					
Luminance in cd/m²							
45°	6906.6	7350.8	7456.9	7313.5	6674.5	7299.2	7333.6
50°	4616.6	5296.3	6183.8	5293.2	4586.0	5212.3	6049.8
55°	3188.9	3643.0	5162.6	3627.1	3159.6	3548.4	5076.9
60°	2330.4	2823.4	4157.0	2854.5	2323.3	2786.4	4206.1
65°	2460.8	2856.6	3043.6	2926.8	2522.2	2928.0	2879.4
70°	2496.2	3043.1	1927.7	3099.9	2510.1	3105.8	1904.2
75°	3117.7	2804.9	2226.3	2866.0	3162.7	2844.5	2041.2
80°	3335.2	2525.3	3295.6	2452.4	3373.7	2573.8	3516.1
85°	3101.6	2900.4	2448.4	2909.9	3084.3	2971.5	2462.2

Photometric test report

Family
Silica® 21 round L

Order number: 51ME63DC3MWA
EAN: 4069025805157

LP number
59826_785

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco



Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC3MWA EAN: 4069025805157	LP number 59826_785
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	12730	81.8
95	241	252	12091	77.6
90	228	250	11448	73.5
85	215	248	10804	69.3
80	203	246	10208	65.5
75	190	243	9560	61.5
70	177	241	8910	57.4
65	164	238	8257	53.3
60	152	235	7654	49.6
55	139	232	6999	45.5
50	126	228	6342	41.4
45	114	225	5735	37.7
40	101	220	5076	33.8
35	89	216	4465	30.0
30	76	210	3802	26.0
25	64	204	3187	22.4
20	51	195	2521	18.5
15	39	185	1904	14.9
10	27	172	1286	11.4
5	14	148	615	7.4
0	3	91	46	3.7