


Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC4MWA EAN: 4069025805218	LP number 59826_786
	Version	surface-mounted luminaire, housing, white, microprismatic optics, direct wide distribution, UGR≤19
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 12730 lm Power consumption = 78.1 W Luminous efficacy = 163 lm/W
		serial documentation 20.05.2026
		siteco

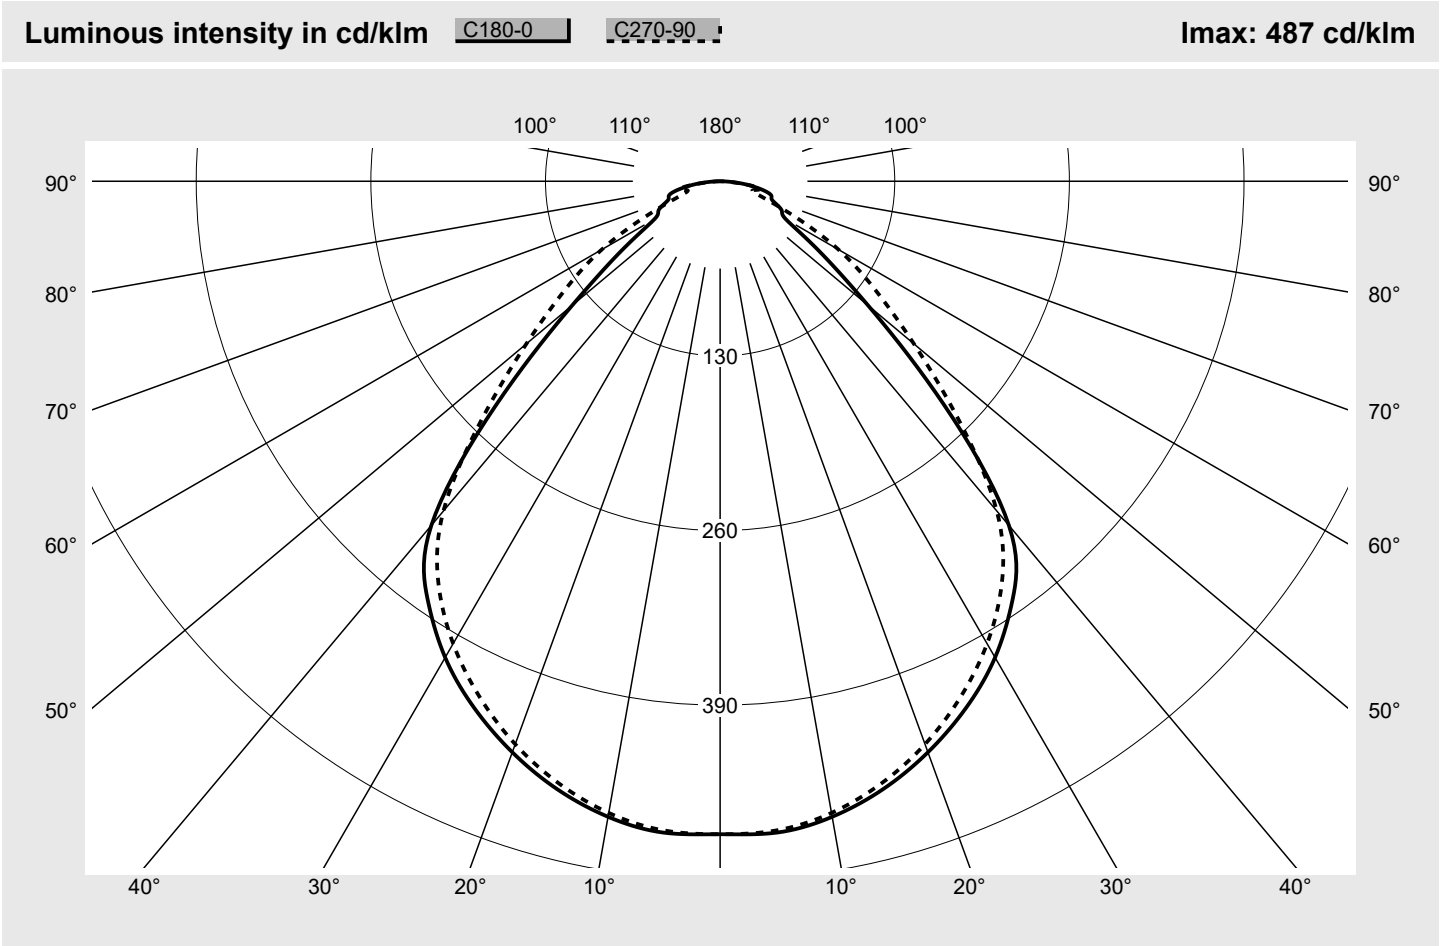

Classifications		Luminaire light output ratios	
DIN 5040	A 5 0	η_{LB}	100.0%
CIE	N1=64 N2=89 N3=97	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC4MWA EAN: 4069025805218	LP number 59826_786
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC4MWA EAN: 4069025805218	LP number 59826_786
------------------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.6	19.5	19.0	19.9	20.4
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 886	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°					
Luminance in cd/m²							
45°	6906.6	7350.8	7456.9	7313.5	6674.5	7299.2	7333.6
50°	4616.6	5296.3	6183.8	5293.2	4586.0	5212.3	6049.8
55°	3188.9	3643.0	5162.6	3627.1	3159.6	3548.4	5076.9
60°	2330.4	2823.4	4157.0	2854.5	2323.3	2786.4	4206.1
65°	2460.8	2856.6	3043.6	2926.8	2522.2	2928.0	2879.4
70°	2496.2	3043.1	1927.7	3099.9	2510.1	3105.8	1904.2
75°	3117.7	2804.9	2226.3	2866.0	3162.7	2844.5	2041.2
80°	3335.2	2525.3	3295.6	2452.4	3373.7	2573.8	3516.1
85°	3101.6	2900.4	2448.4	2909.9	3084.3	2971.5	2462.2

Photometric test report

Family
Silica® 21 round L

Order number: 51ME63DC4MWA
EAN: 4069025805218

LP number
59826_786

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco



Photometric test report

Family Silica® 21 round L	Order number: 51ME63DC4MWA EAN: 4069025805218	LP number 59826_786
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	12730	78.1
95	241	252	12086	74.1
90	228	250	11442	70.2
85	216	248	10845	66.5
80	203	246	10197	62.6
75	190	243	9547	58.8
70	177	241	8896	54.8
65	165	238	8293	51.2
60	152	235	7638	47.4
55	139	232	6983	43.5
50	127	229	6376	39.9
45	114	225	5718	36.2
40	102	221	5109	32.6
35	89	216	4449	28.8
30	77	210	3837	25.3
25	64	204	3173	21.5
20	52	196	2559	18.0
15	39	185	1893	14.3
10	27	172	1277	11.0
5	15	150	659	7.5
0	3	91	41	3.7