

Photometric test report

Family
Silica® 21 round S

Order number: 51MF21DA3NWA
EAN: 4069025805775

LP number
60073_4

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 3000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 2250 lm
Power consumption = 14.8 W
Luminous efficacy = 152 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

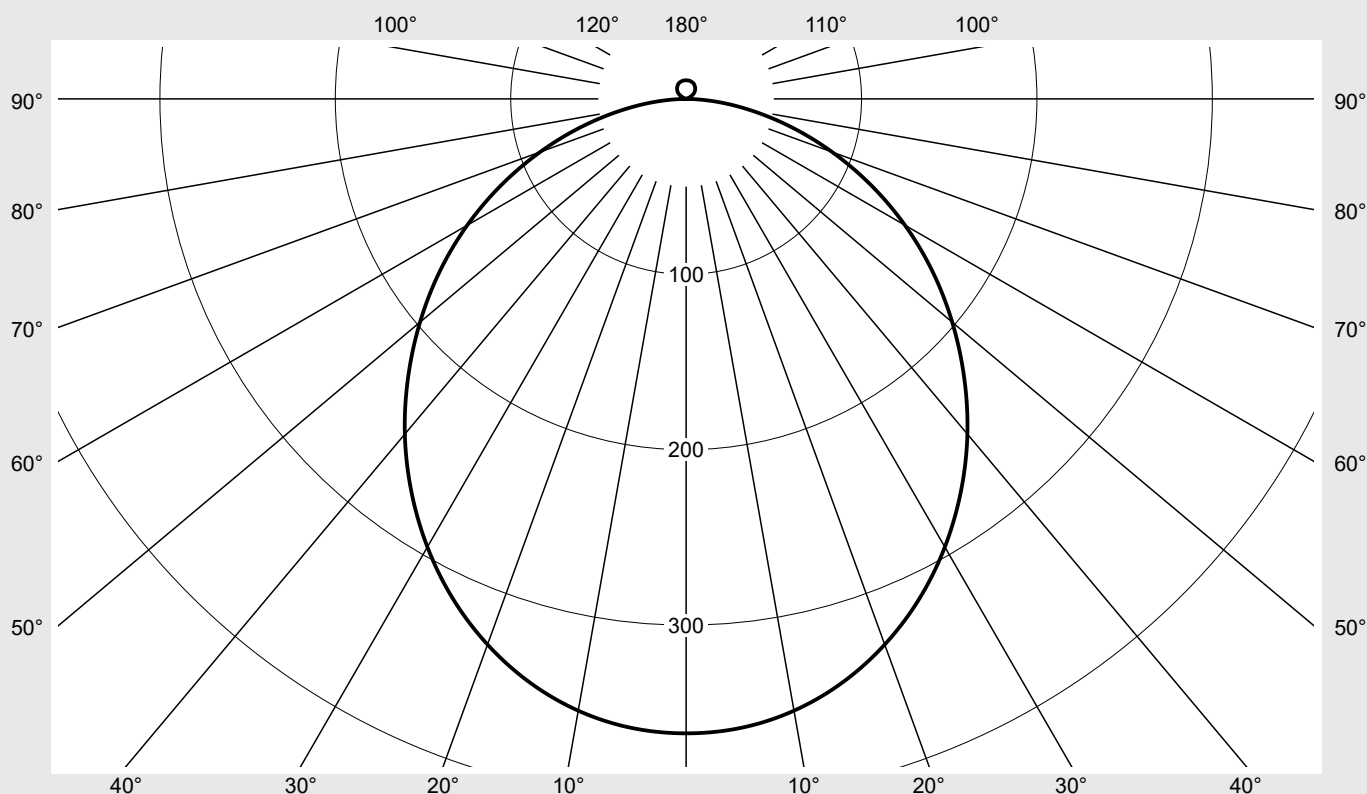

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF21DA3NWA EAN: 4069025805775	LP number 60073_4
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51MF21DA3NWA EAN: 4069025805775							LP number 60073_4	
UGR-Table							Standard room			siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	19.9	21.5	20.3	21.8	22.1	19.9	21.5	20.3	21.8	22.1
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.5	19.5	20.9	21.3	19.1	20.5	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.7	24.2	22.4	23.3	22.9	23.7	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.7	22.0	22.8	22.4	23.3	23.7
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.2	23.7	22.0	22.8	22.5	23.2	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 386
C-planes	0°		
γ	Luminance in cd/m²		
45°	6094.0		
50°	5923.9		
55°	5747.9		
60°	5541.0		
65°	5289.7		
70°	4980.4		
75°	4609.2		
80°	4136.9		
85°	3533.7		

Photometric test report

Family
Silica® 21 round S

Order number: 51MF21DA3NWA
EAN: 4069025805775

LP number
60073_4

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

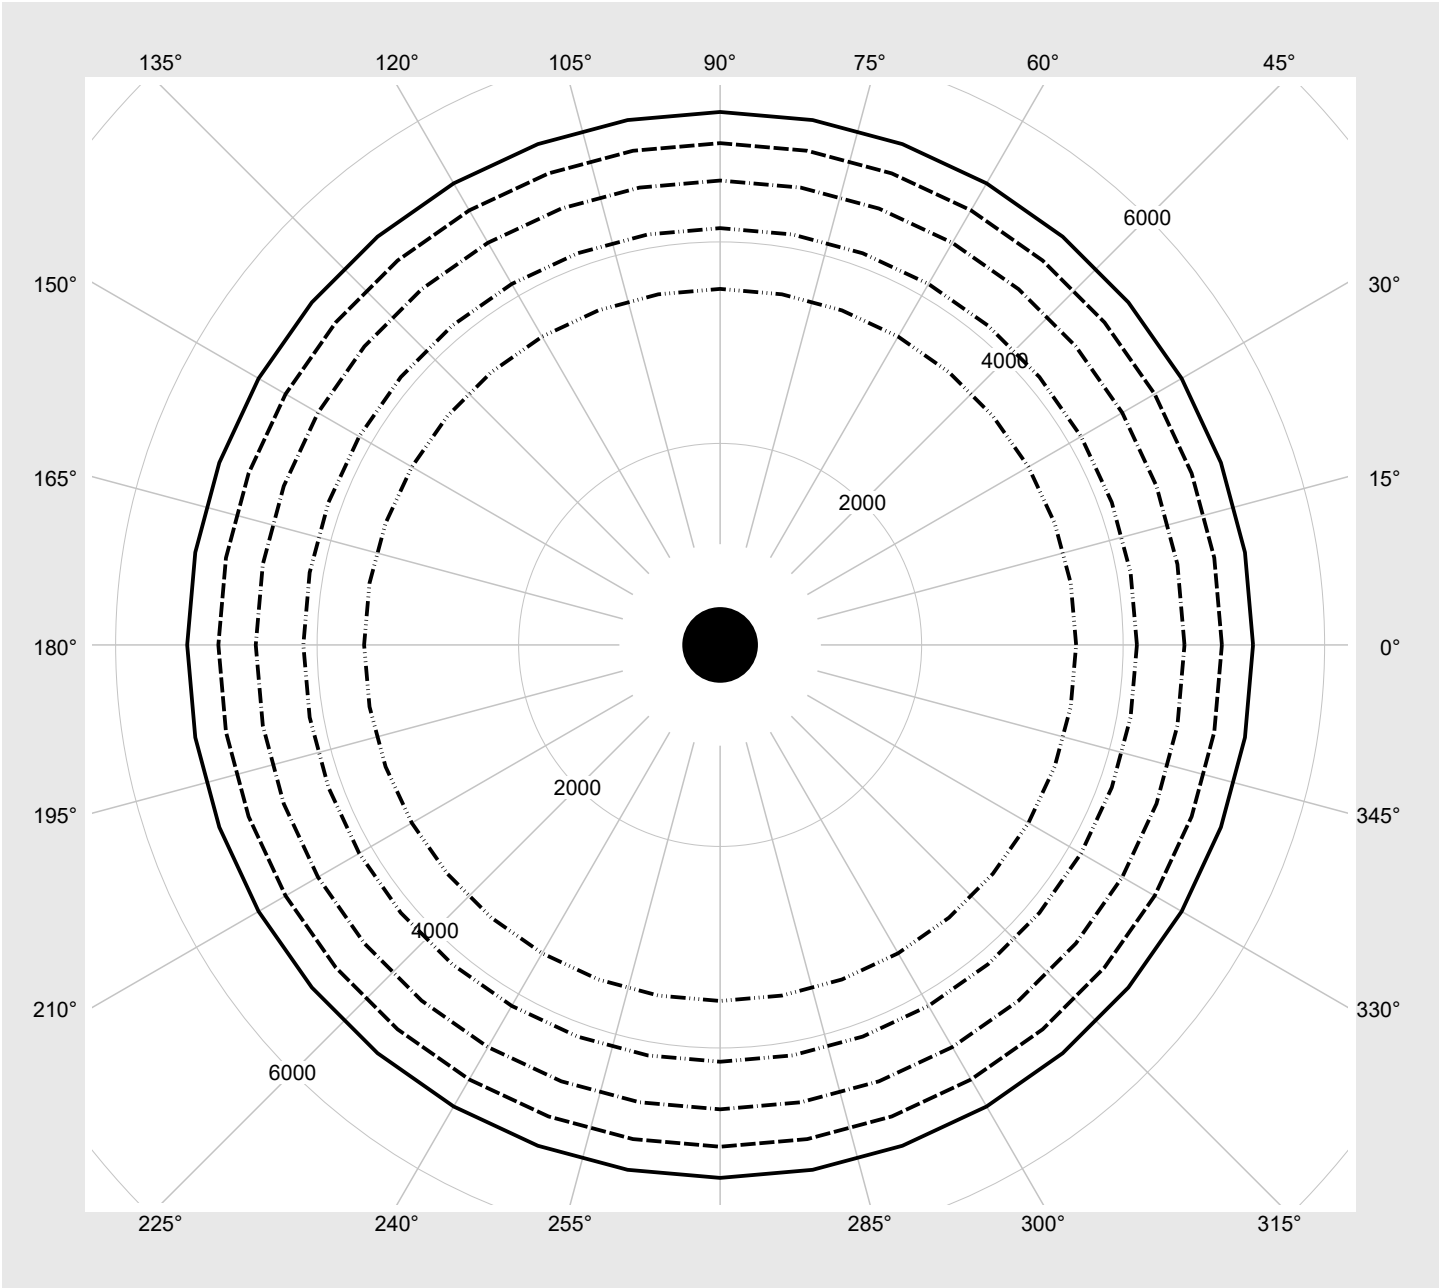

Photometric test report

Family Silica® 21 round S	Order number: 51MF21DA3NWA EAN: 4069025805775	LP number 60073_4
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2250	14.8
95	241	252	2136	14.1
90	228	250	2022	13.3
85	216	248	1916	12.7
80	203	246	1802	12.0
75	190	243	1687	11.3
70	177	241	1572	10.6
65	165	238	1466	10.0
60	152	235	1350	9.3
55	139	232	1234	8.6
50	127	229	1127	7.9
45	114	225	1010	7.1
40	102	221	903	6.5
35	89	216	786	5.7
30	77	210	678	5.1
25	64	204	561	4.3
20	52	196	452	3.7
15	39	185	334	2.8
10	27	172	224	2.1
5	15	150	114	1.3
5	14	148	105	1.2