

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DBENSA
EAN: 4069025806178

LP number
60073_49

serial
documentation
20.05.2026



Version

surface-mounted luminaire, housing, silver,
cover, opal, direct extremely wide distribution
with ceiling illumination, UGR≤22

Lamps

LED 4000 K | CRI ≥ 90

Controlgear

ECG-DALI

Rated values


Net luminous flux = 5210 lm
Power consumption = 33.2 W
Luminous efficacy = 156.9 lm/W

siteco

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

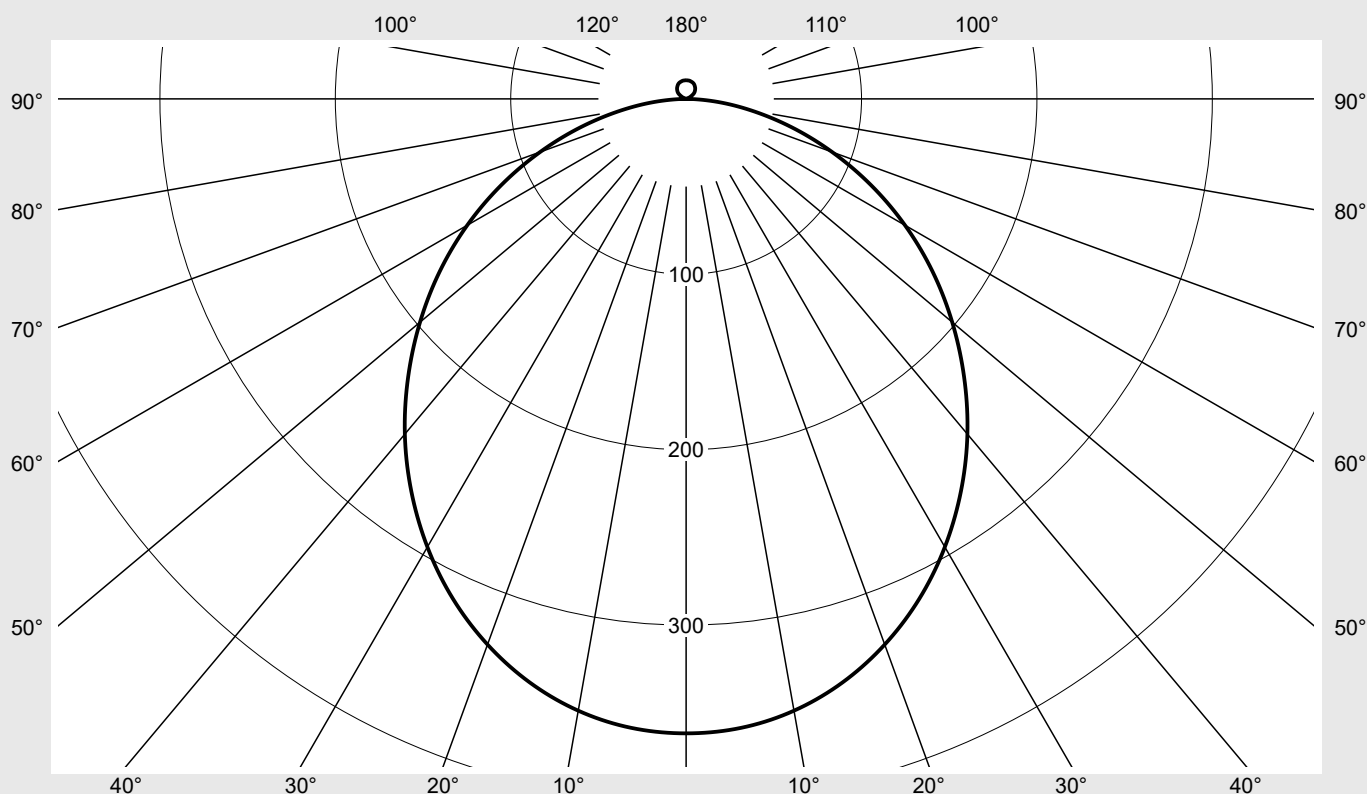

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DBENSA EAN: 4069025806178	LP number 60073_49
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51MF21DBENSA EAN: 4069025806178							LP number 60073_49	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.5	23.3	22.9	23.8	24.2	22.5	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.9	22.4	23.3	23.8	22.0	22.9	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.8	22.0	22.8	22.5	23.3	23.8
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
C- planes		0°		
γ	Luminance in cd/m²			
45°	6122.6			
50°	5951.7			
55°	5774.9			
60°	5567.1			
65°	5314.6			
70°	5003.7			
75°	4630.8			
80°	4156.4			
85°	3550.3			

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DBENSA
EAN: 4069025806178

LP number
60073_49

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

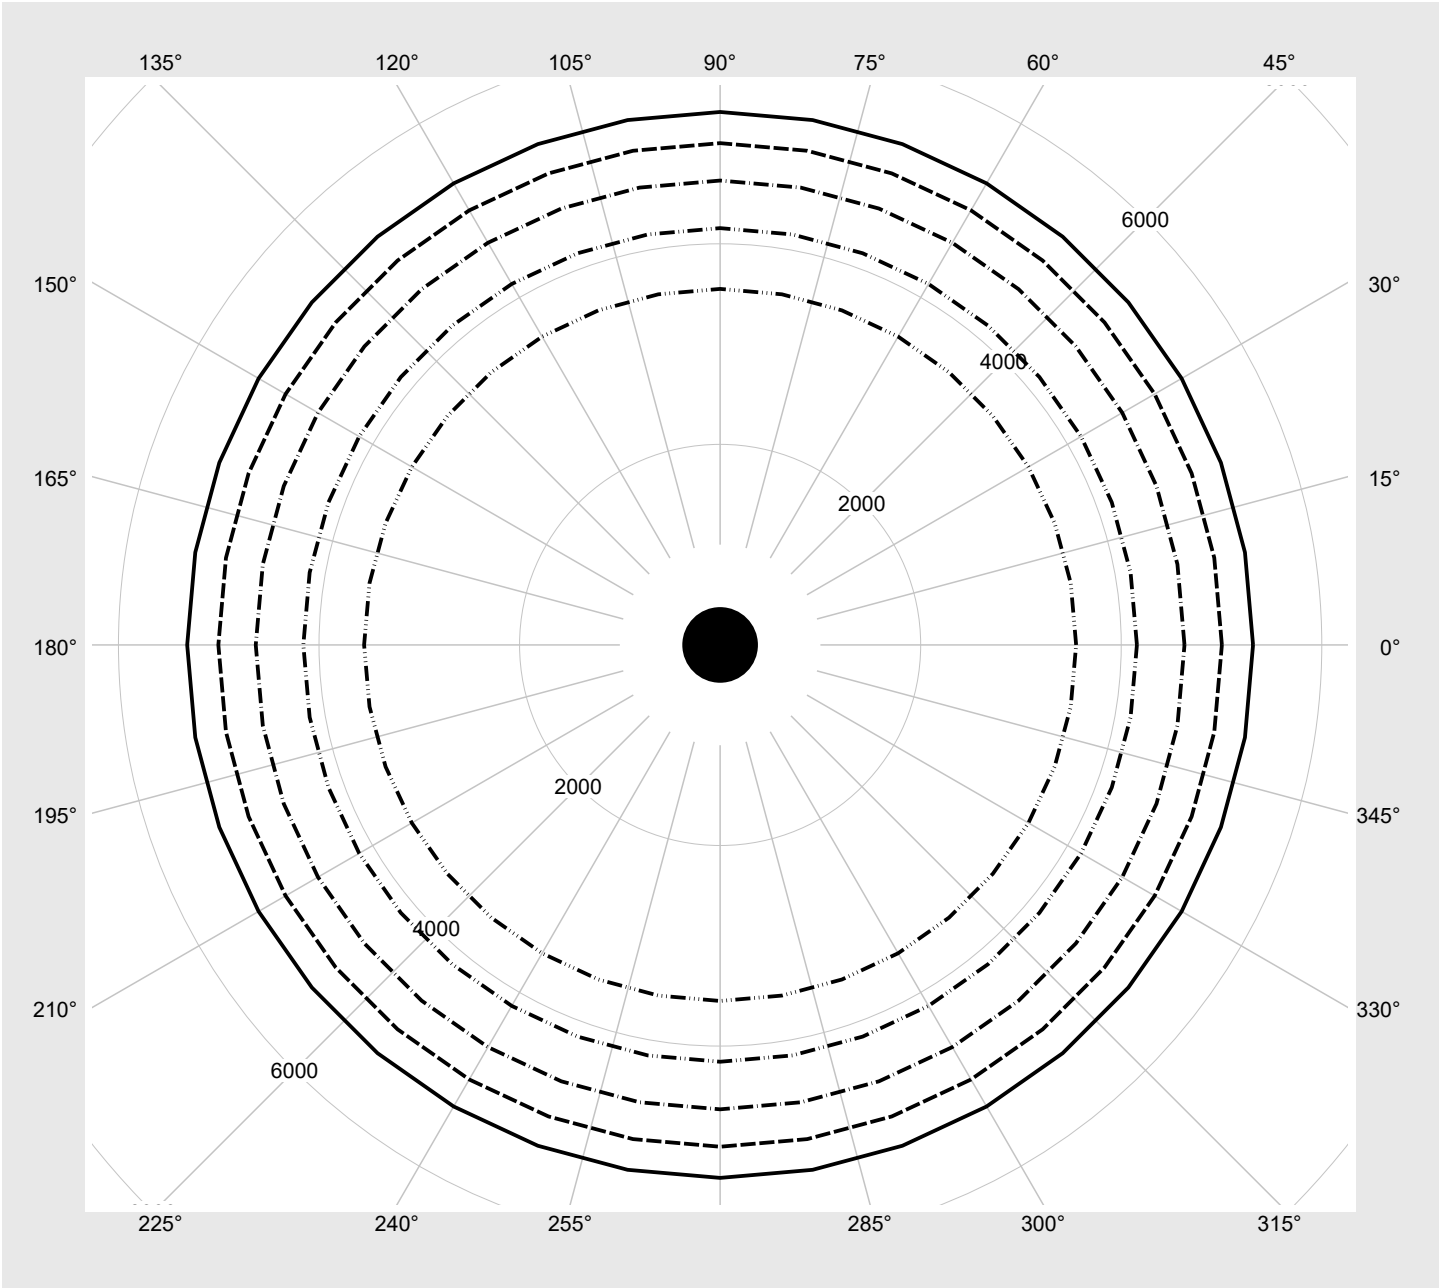

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DBENSA EAN: 4069025806178	LP number 60073_49
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5210	33.2
95	241	252	4953	31.7
90	228	250	4694	30.0
85	215	248	4434	28.2
80	202	246	4175	26.6
75	189	243	3913	25.0
70	176	241	3650	23.3
65	163	238	3385	21.6
60	150	235	3121	20.0
55	138	232	2875	18.5
50	125	228	2608	16.9
45	112	224	2340	15.3
40	100	220	2091	13.8
35	87	215	1820	12.4
30	75	209	1570	10.9
25	62	202	1299	9.3
20	50	194	1047	7.8
15	37	183	774	6.0
10	25	169	520	4.4
5	13	145	265	2.9
2	6	117	116	2.0