

Photometric test report

Family
Silica® 21 round L

Order number: 51MF21DCENBA
EAN: 4069025806390

LP number
60073_37

serial
documentation
20.05.2026

siteco



Version

surface-mounted luminaire, housing, black,
cover, opal, direct extremely wide distribution
with ceiling illumination, UGR≤22

Lamps

LED 4000 K | CRI ≥ 90

Controlgear

ECG-DALI

Rated values

Net luminous flux = 11880 lm


Power consumption = 75.1 W

Luminous efficacy = 158.2 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

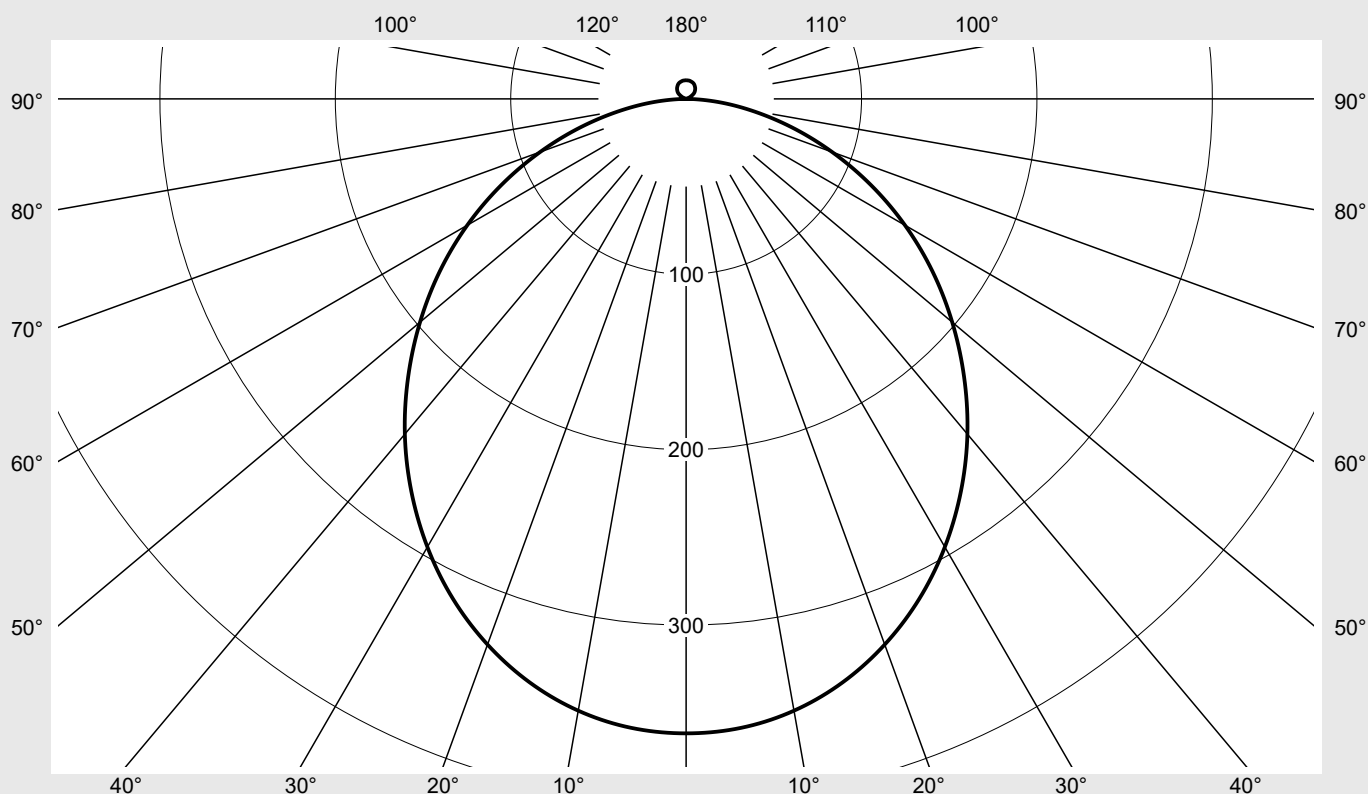

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51MF21DCENBA EAN: 4069025806390	LP number 60073_37
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round L			Order number: 51MF21DCENBA EAN: 4069025806390							LP number 60073_37	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 886
C-planes		0°		
γ	Luminance in cd/m²			
45°	6107.2			
50°	5936.7			
55°	5760.4			
60°	5553.1			
65°	5301.2			
70°	4991.2			
75°	4619.2			
80°	4145.9			
85°	3541.4			

Photometric test report

Family
Silica® 21 round L

Order number: 51MF21DCENBA
EAN: 4069025806390

LP number
60073_37

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

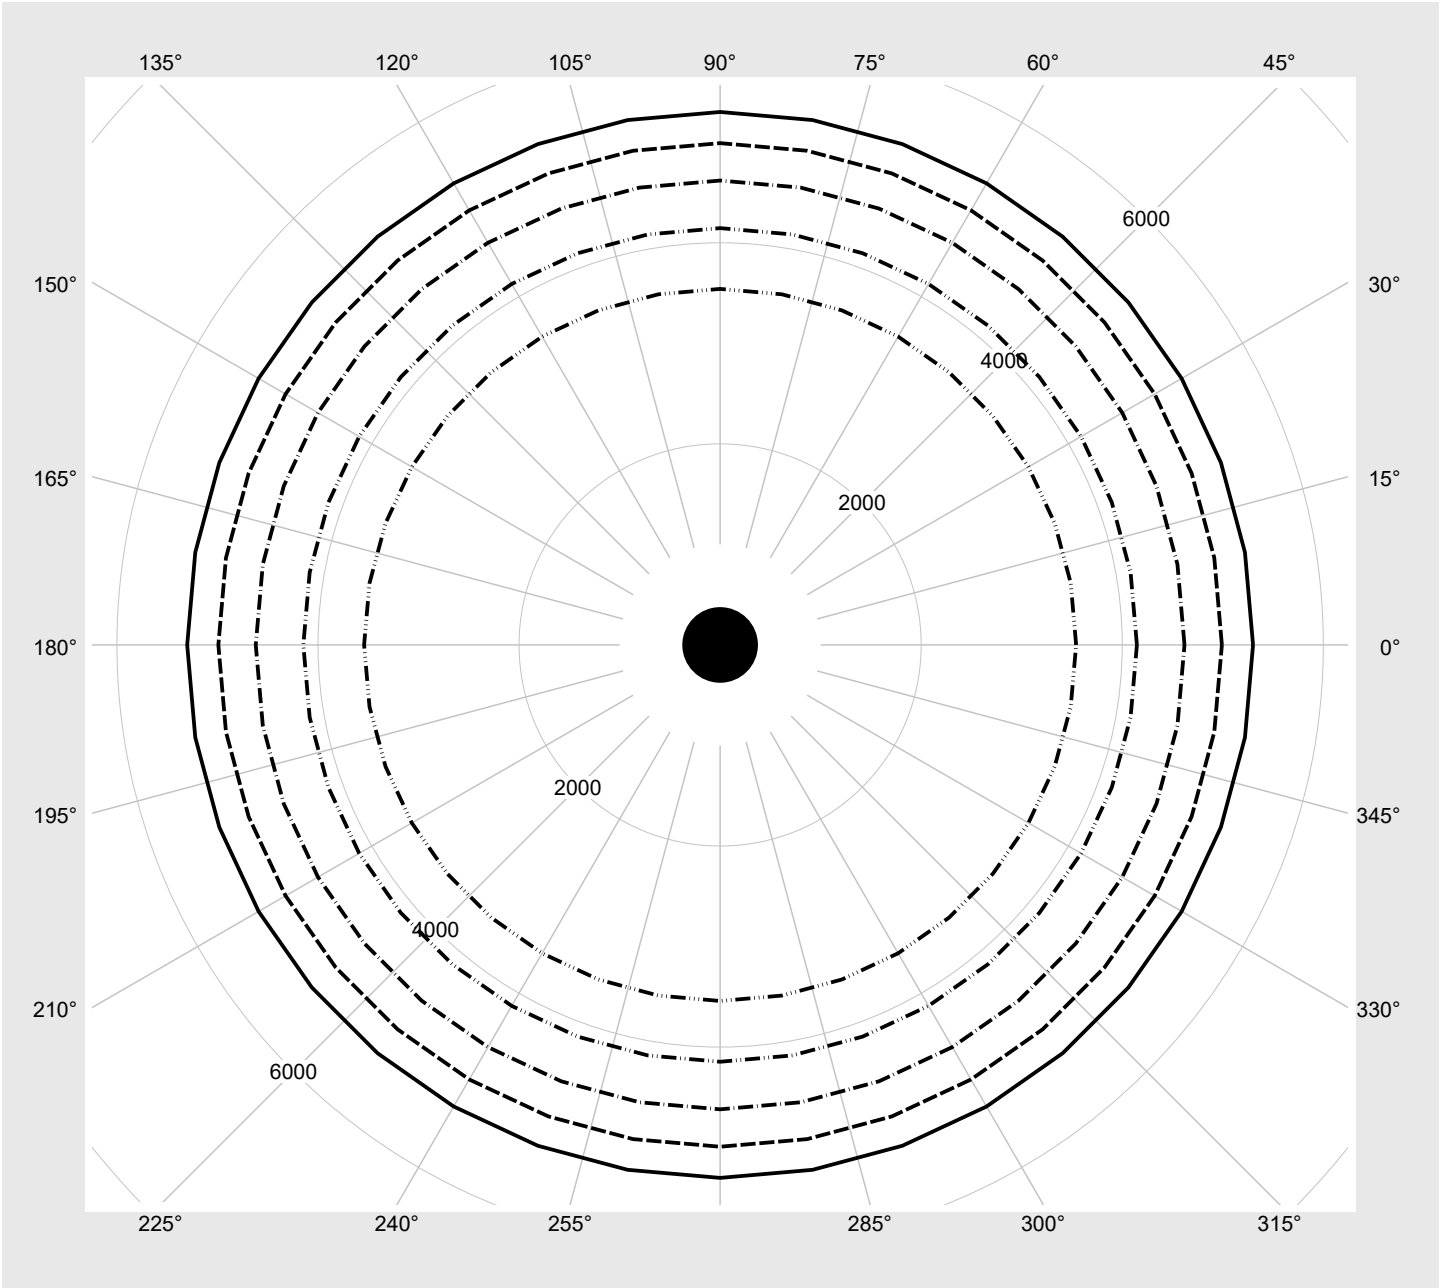

Photometric test report

Family Silica® 21 round L	Order number: 51MF21DCENBA EAN: 4069025806390	LP number 60073_37
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	11880	75.1
95	241	252	11297	71.2
90	228	250	10711	67.3
85	214	248	10076	63.2
80	201	245	9484	59.4
75	188	243	8888	55.6
70	176	241	8336	52.1
65	163	238	7735	48.4
60	150	235	7132	44.6
55	137	231	6526	40.9
50	124	228	5918	37.1
45	112	224	5355	33.8
40	99	219	4742	30.1
35	87	215	4173	26.7
30	74	209	3553	23.1
25	62	202	2979	19.7
20	49	194	2354	16.2
15	37	183	1775	13.0
10	25	169	1193	9.8
5	13	145	610	6.5
1	3	91	123	3.4