

Photometric test report

Family
Silica® 21 round S

Order number: 51MF23DA3MBA
EAN: 4069025806468

LP number
60072_22

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, black, microprismatic optics, direct wide distribution with ceiling illumination, UGR≤19

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 2480 lm
Power consumption = 17.6 W
Luminous efficacy = 140.9 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 473 cd/klm

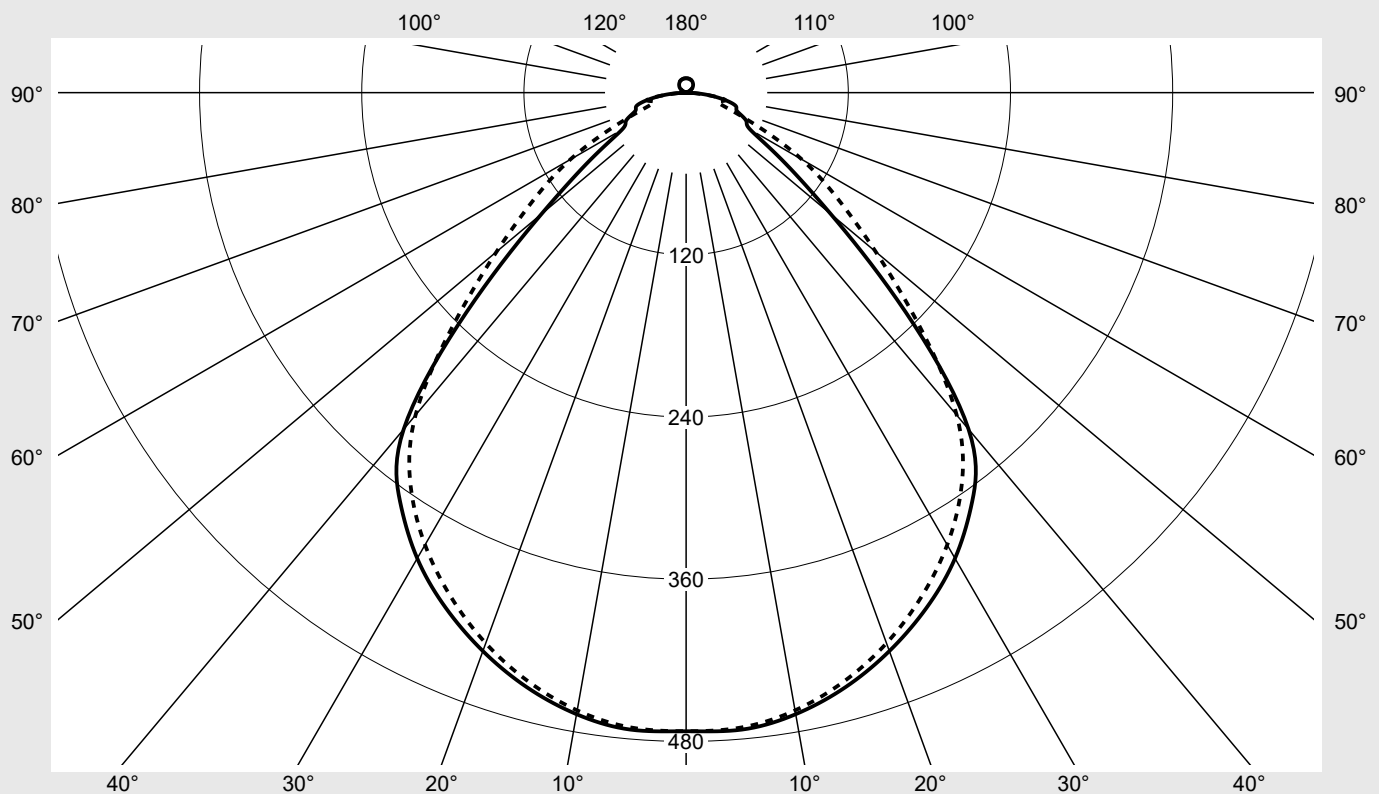

Classifications

DIN 5040 A 5 3
CIE N1=64 N2=89 N3=97
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF23DA3MBA EAN: 4069025806468	LP number 60072_22
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51MF23DA3MBA EAN: 4069025806468							LP number 60072_22	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9	20.3
	6H	19.2	20.0	19.6	20.4	20.9	19.1	19.9	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 386	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6890.4	7333.6	7439.4	7296.4	6658.9	7282.2	7316.4
50°	4605.8	5283.9	6169.3	5280.8	4575.3	5200.1	6035.7
55°	3181.4	3634.5	5150.5	3618.7	3152.1	3540.1	5065.0
60°	2325.0	2816.8	4147.3	2847.8	2317.9	2779.9	4196.2
65°	2455.0	2849.9	3036.5	2920.0	2516.3	2921.2	2872.6
70°	2490.3	3035.9	1923.2	3092.7	2504.3	3098.6	1899.8
75°	3110.5	2798.3	2221.1	2859.3	3155.3	2837.9	2036.4
80°	3327.4	2519.5	3288.0	2446.7	3365.9	2567.8	3507.9
85°	3094.4	2893.6	2442.8	2903.1	3077.2	2964.6	2456.4

Photometric test report

Family Silica® 21 round S	Order number: 51MF23DA3MBA EAN: 4069025806468	LP number 60072_22
--	--	-------------------------------------

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

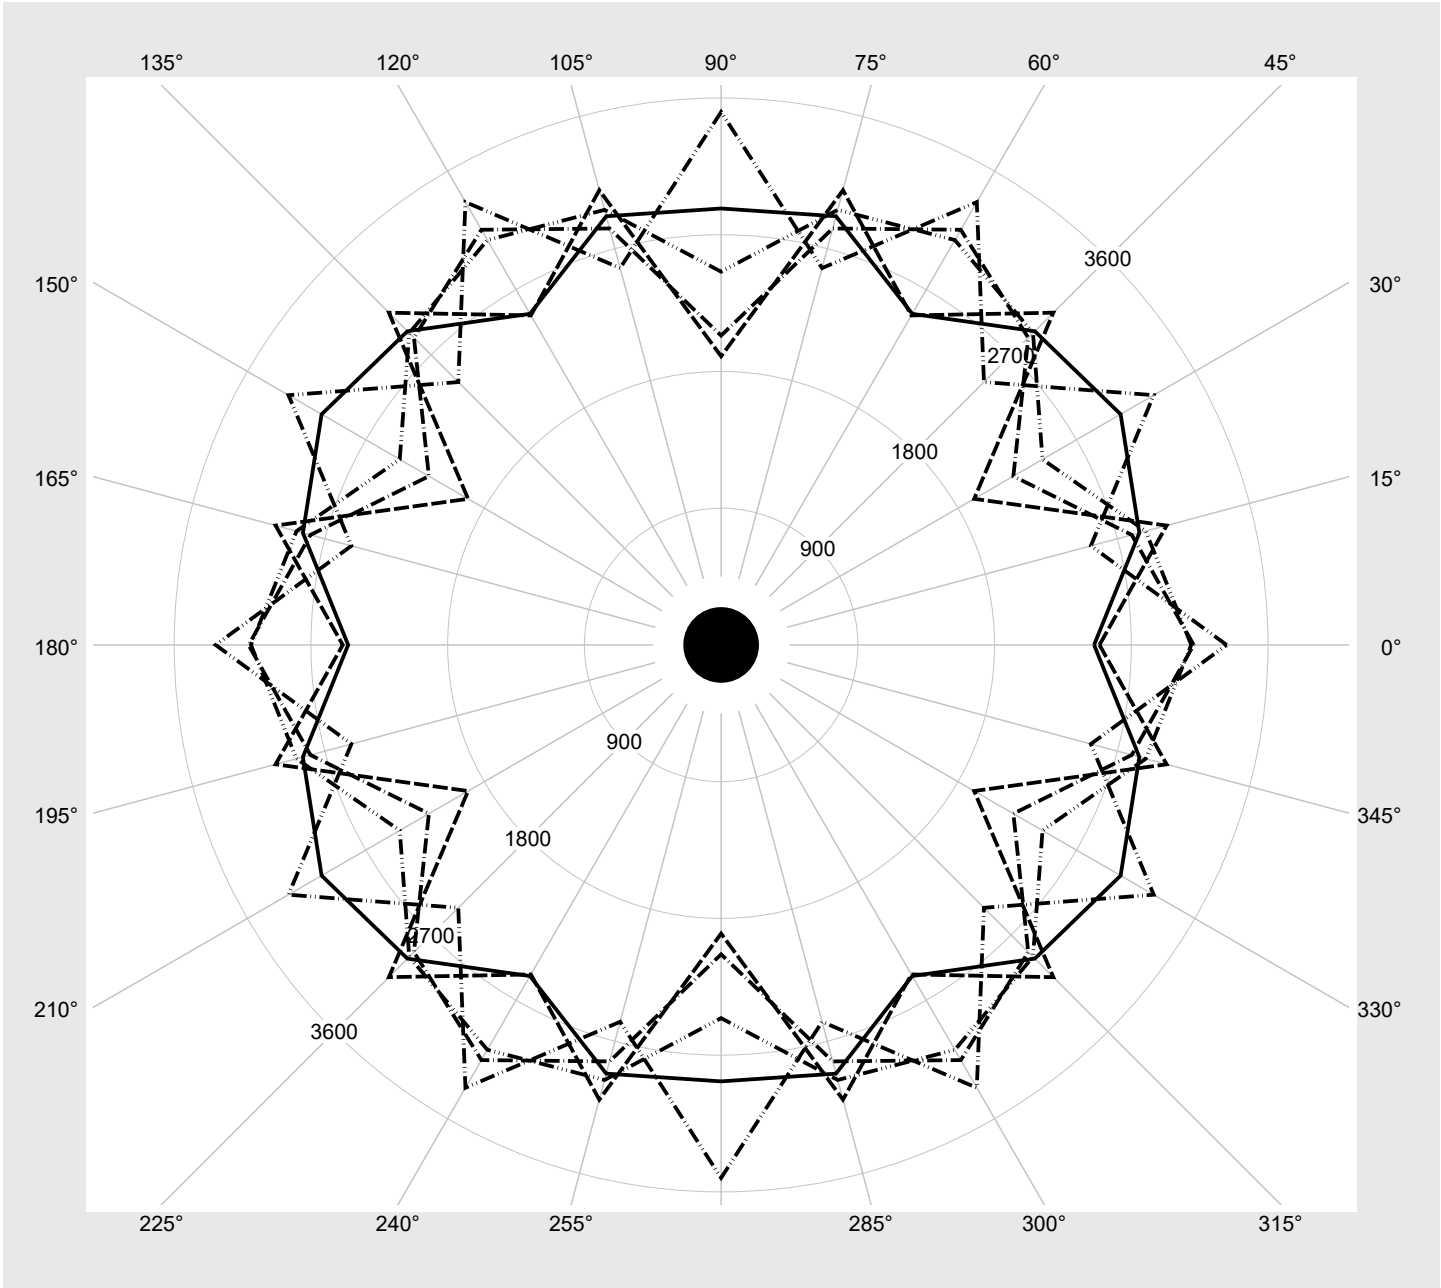

Photometric test report

Family Silica® 21 round S	Order number: 51MF23DA3MBA EAN: 4069025806468	LP number 60072_22
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2480	17.6
95	241	252	2355	16.8
90	228	250	2231	15.9
85	215	248	2105	15.0
80	203	246	1989	14.2
75	190	243	1863	13.3
70	177	241	1736	12.5
65	164	238	1610	11.7
60	152	235	1492	10.9
55	139	232	1365	10.1
50	126	228	1237	9.2
45	114	225	1119	8.4
40	101	220	990	7.5
35	89	216	871	6.7
30	76	210	742	5.9
25	64	204	623	5.1
20	51	195	493	4.2
15	39	185	373	3.3
10	27	172	252	2.5
5	14	148	120	1.4
4	12	142	100	1.3