

Photometric test report

Family
Silica® 21 round L

Order number: 51MF23DC3MBA
EAN: 4069025806949

LP number
60072_34

serial
documentation
20.05.2026

siteco



Version

surface-mounted luminaire, housing, black,
microprismatic optics, direct wide distribution
with ceiling illumination, UGR≤19

Lamps

LED 3000 K | CRI ≥ 80

Controlgear

ECG-DALI

Rated values

Net luminous flux = 13100 lm

Power consumption = 79.4 W


Luminous efficacy = 165 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 473 cd/klm

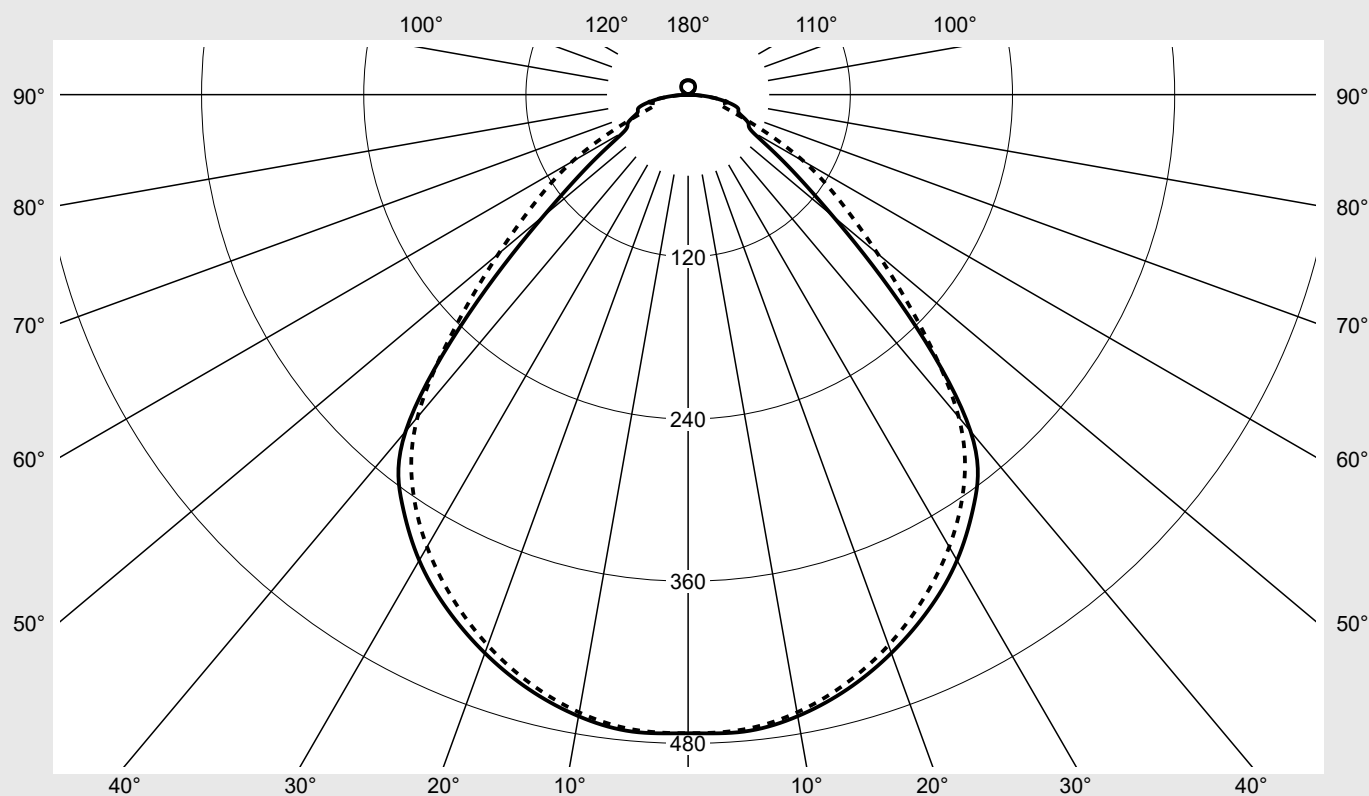

Classifications

DIN 5040 A 5 3
CIE N1=64 N2=89 N3=97
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DC3MBA EAN: 4069025806949	LP number 60072_34
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DC3MBA EAN: 4069025806949	LP number 60072_34
------------------------------	--	-----------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.7	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.6	19.5	19.0	19.9	20.4
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.9
	8H	19.5	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.4	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 886	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6908.3	7352.6	7458.7	7315.4	6676.2	7301.1	7335.5
50°	4617.8	5297.6	6185.4	5294.5	4587.2	5213.6	6051.3
55°	3189.6	3643.9	5163.9	3628.1	3160.3	3549.3	5078.2
60°	2331.0	2824.1	4158.1	2855.2	2323.9	2787.1	4207.1
65°	2461.4	2857.3	3044.4	2927.6	2522.8	2928.8	2880.1
70°	2496.8	3043.8	1928.2	3100.7	2510.8	3106.7	1904.7
75°	3118.6	2805.6	2226.9	2866.8	3163.5	2845.3	2041.7
80°	3336.1	2526.0	3296.5	2453.1	3374.6	2574.5	3517.0
85°	3102.5	2901.1	2449.1	2910.6	3085.2	2972.3	2462.8

Photometric test report

Family
Silica® 21 round L

Order number: 51MF23DC3MBA
EAN: 4069025806949

LP number
60072_34

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

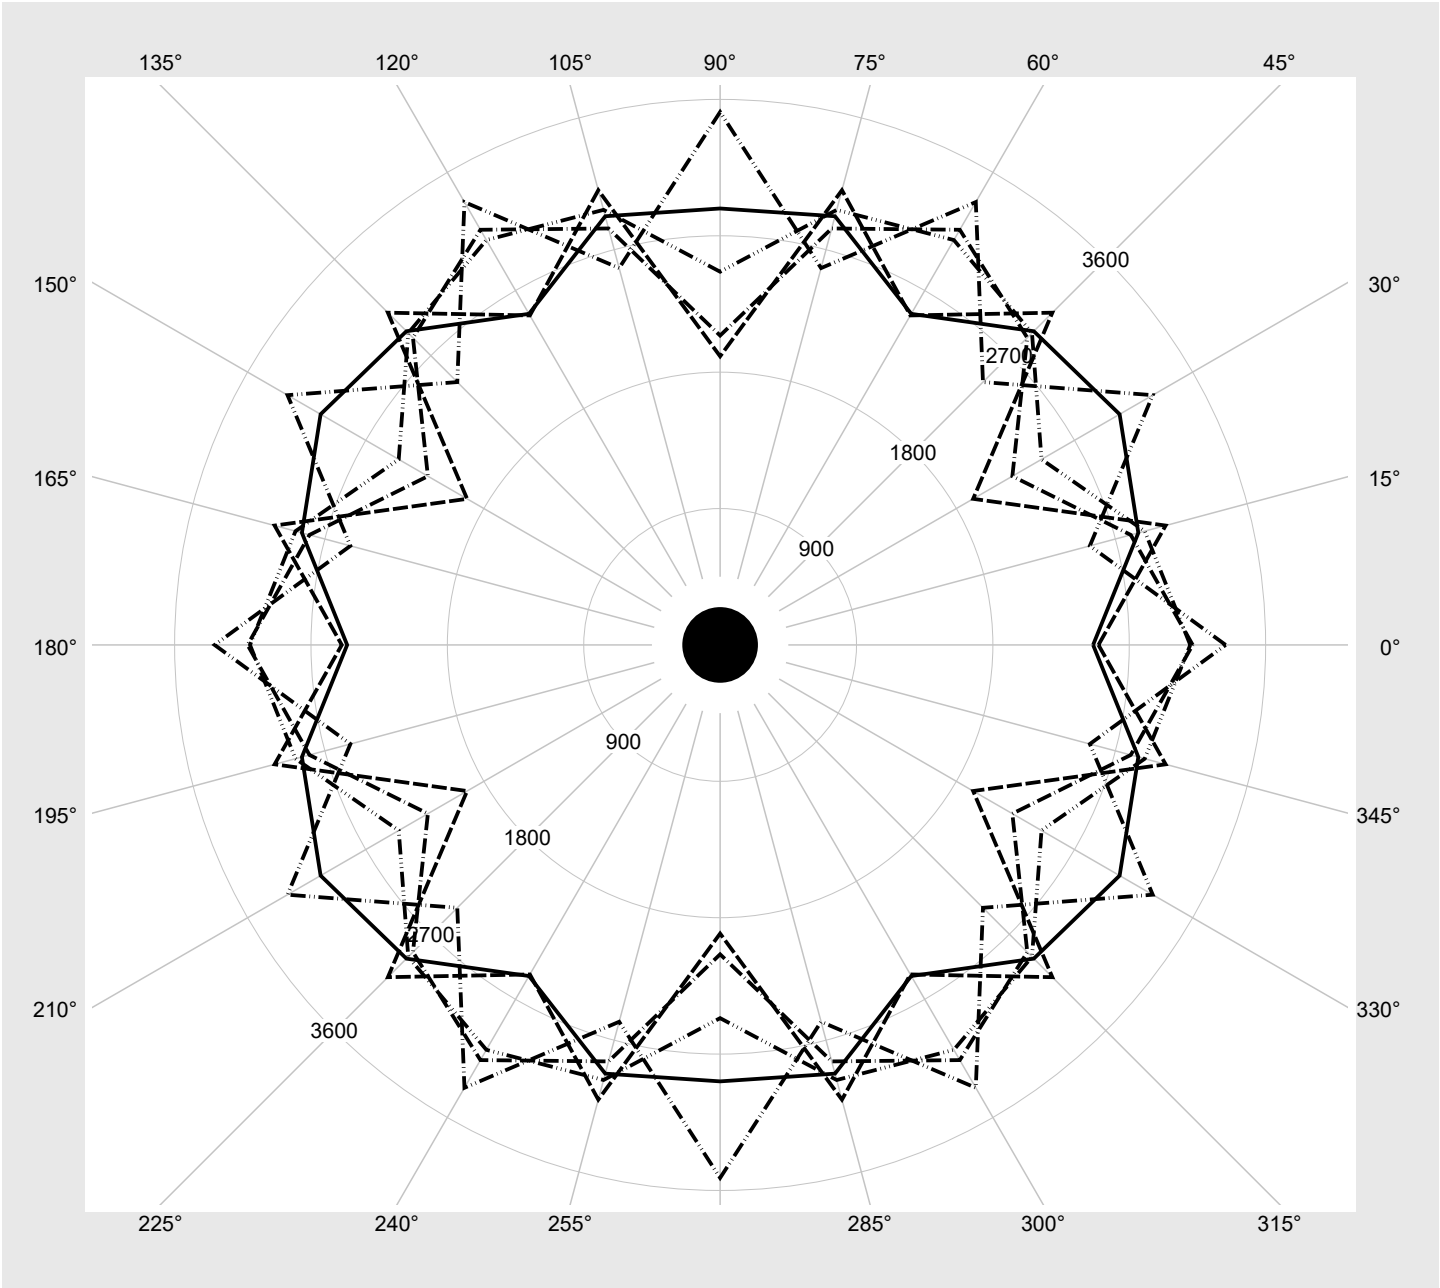

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DC3MBA EAN: 4069025806949	LP number 60072_34
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	13100	79.4
95	241	252	12448	75.3
90	228	250	11792	71.3
85	215	248	11134	67.3
80	202	246	10474	63.2
75	189	243	9810	59.3
70	177	241	9195	55.6
65	164	238	8527	51.5
60	151	235	7855	47.6
55	138	232	7182	43.7
50	126	228	6559	40.0
45	113	224	5882	36.1
40	101	220	5255	32.5
35	88	215	4572	28.6
30	76	210	3940	25.1
25	63	203	3253	21.2
20	51	195	2616	17.7
15	39	185	1976	14.2
10	27	172	1335	10.9
5	14	148	639	7.0
0	3	91	48	3.5