

Photometric test report

Family
Silica® 21 round L

Order number: 51MF23DCEMWA
EAN: 4069025807151

LP number
60072_19

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, microprismatic optics, direct wide distribution with ceiling illumination, UGR≤19

Lamps LED 4000 K | CRI ≥ 90

Controlgear ECG-DALI


Rated values Net luminous flux = 13100 lm
Power consumption = 80.5 W
Luminous efficacy = 162.7 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 473 cd/klm

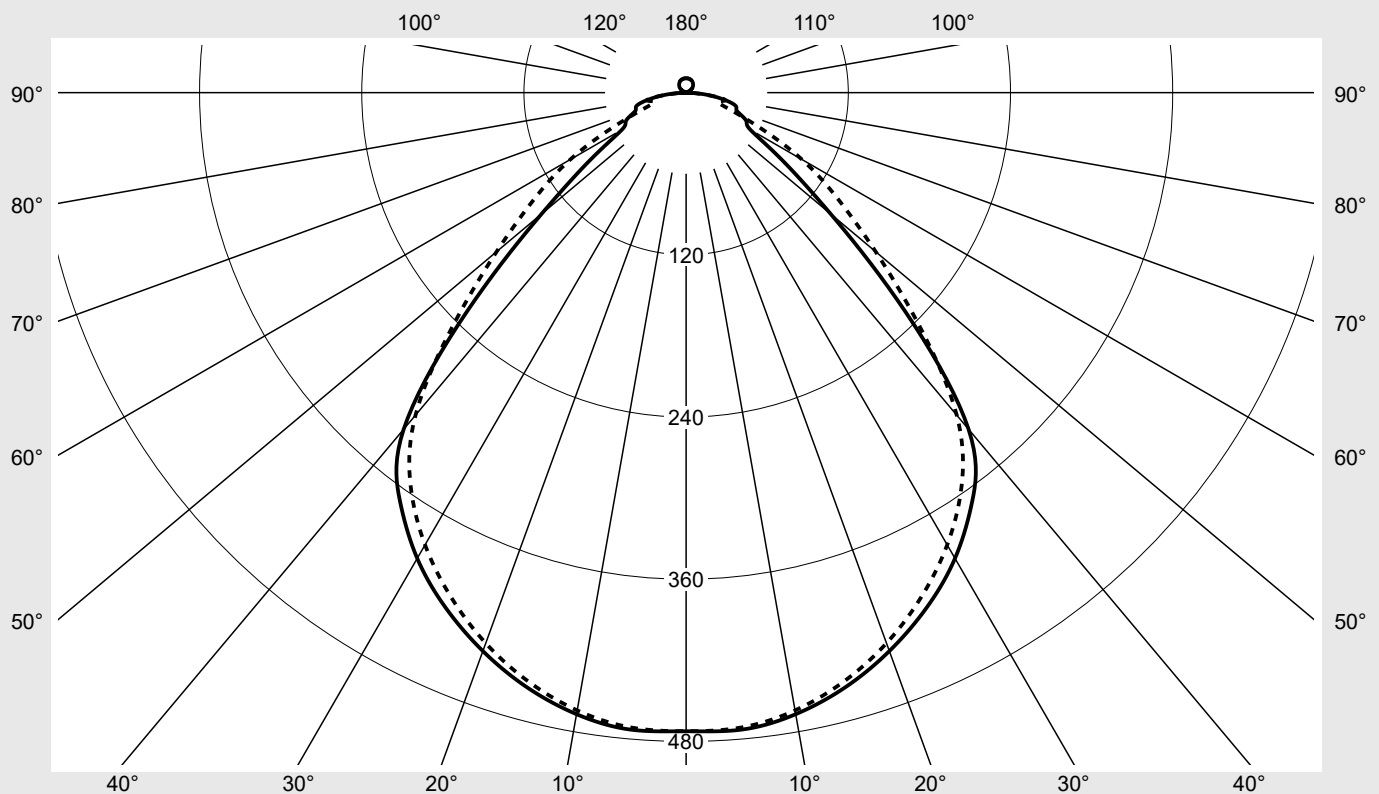

Classifications

DIN 5040 A 5 3
CIE N1=64 N2=89 N3=97
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DCEMWA EAN: 4069025807151	LP number 60072_19
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0


Photometric test report

Family Silica® 21 round L		Order number: 51MF23DCEMWA EAN: 4069025807151							LP number 60072_19	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.7
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5
	4H	18.6	19.5	19.0	19.9	20.4	18.6	19.5	19.0	19.9
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4
	8H	19.5	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6
	12H	19.7	20.4	20.2	20.8	21.3	19.6	20.3	20.1	20.7
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 886	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°	Luminance in cd/m²				
45°		6908.3	7352.6	7458.7	7315.4	6676.2	7301.1
50°		4617.8	5297.6	6185.4	5294.5	4587.2	5213.6
55°		3189.6	3643.9	5163.9	3628.1	3160.3	3549.3
60°		2331.0	2824.1	4158.1	2855.2	2323.9	2787.1
65°		2461.4	2857.3	3044.4	2927.6	2522.8	2928.8
70°		2496.8	3043.8	1928.2	3100.7	2510.8	3106.7
75°		3118.6	2805.6	2226.9	2866.8	3163.5	2845.3
80°		3336.1	2526.0	3296.5	2453.1	3374.6	2574.5
85°		3102.5	2901.1	2449.1	2910.6	3085.2	2972.3

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DCEMWA EAN: 4069025807151	LP number 60072_19
Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°		

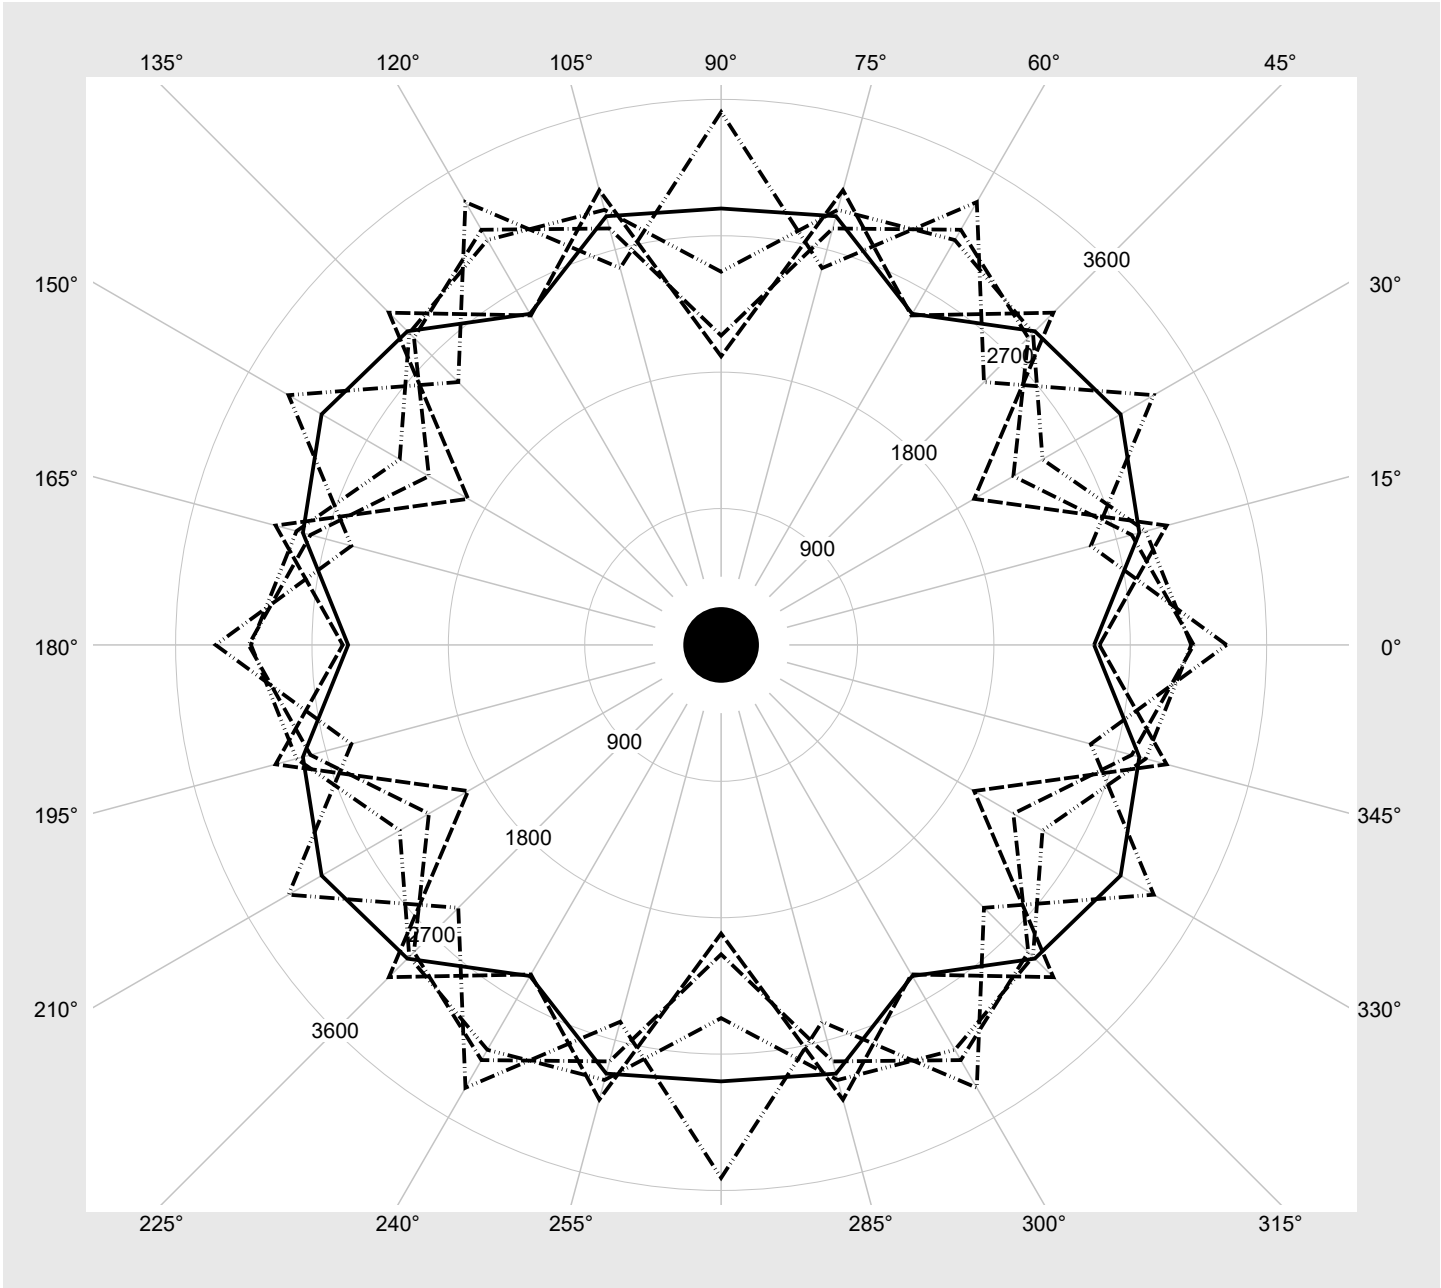

Photometric test report

Family Silica® 21 round L	Order number: 51MF23DCEMWA EAN: 4069025807151	LP number 60072_19
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	13100	80.5
95	241	252	12459	76.3
90	228	250	11814	72.2
85	214	248	11117	67.7
80	201	245	10464	63.7
75	188	243	9810	59.6
70	175	240	9151	55.5
65	163	238	8540	51.7
60	150	235	7875	47.7
55	137	231	7208	43.7
50	124	228	6537	39.7
45	112	224	5916	36.1
40	99	219	5239	32.1
35	87	215	4611	28.5
30	74	209	3928	24.5
25	62	202	3293	20.9
20	49	194	2604	17.2
15	37	183	1964	13.7
10	25	169	1321	10.3
5	13	145	676	6.7
1	3	91	137	3.5