

Photometric test report

Family
Silica® 21 round S

Order number: 51MF61DA4NSA
EAN: 4069025810137

LP number
60071_41

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, silver, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 2190 lm
Power consumption = 14.7 W
Luminous efficacy = 149 lm/W

siteco

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

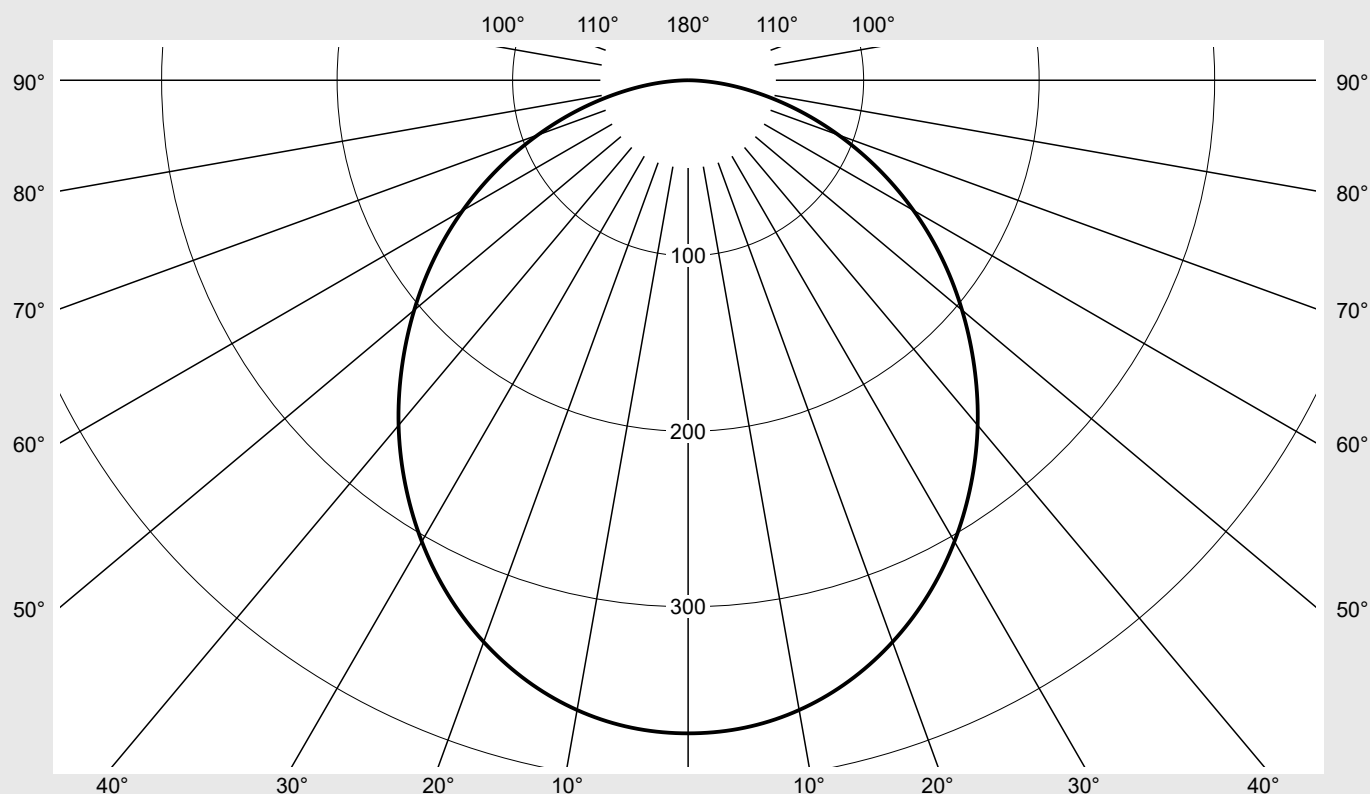

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DA4NSA EAN: 4069025810137	LP number 60071_41
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51MF61DA4NSA EAN: 4069025810137							LP number 60071_41		
UGR-Table									Standard room		siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5		0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3		0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		0.2
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7	
	3H	19.9	21.5	20.3	21.8	22.2	19.9	21.5	20.3	21.8	22.2	
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7	
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1	
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3	
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3	
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3	
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9	
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6	
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1	
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2	
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3	
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8	
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4	
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6	
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8	
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7	
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4	
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7	

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 386
C-planes				
	0°			
γ	Luminance in cd/m²			
45°	6102.0			
50°	5931.7			
55°	5755.5			
60°	5548.3			
65°	5296.6			
70°	4986.9			
75°	4615.2			
80°	4142.4			
85°	3538.5			

Photometric test report

Family
Silica® 21 round S

Order number: 51MF61DA4NSA
EAN: 4069025810137

LP number
60071_41

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

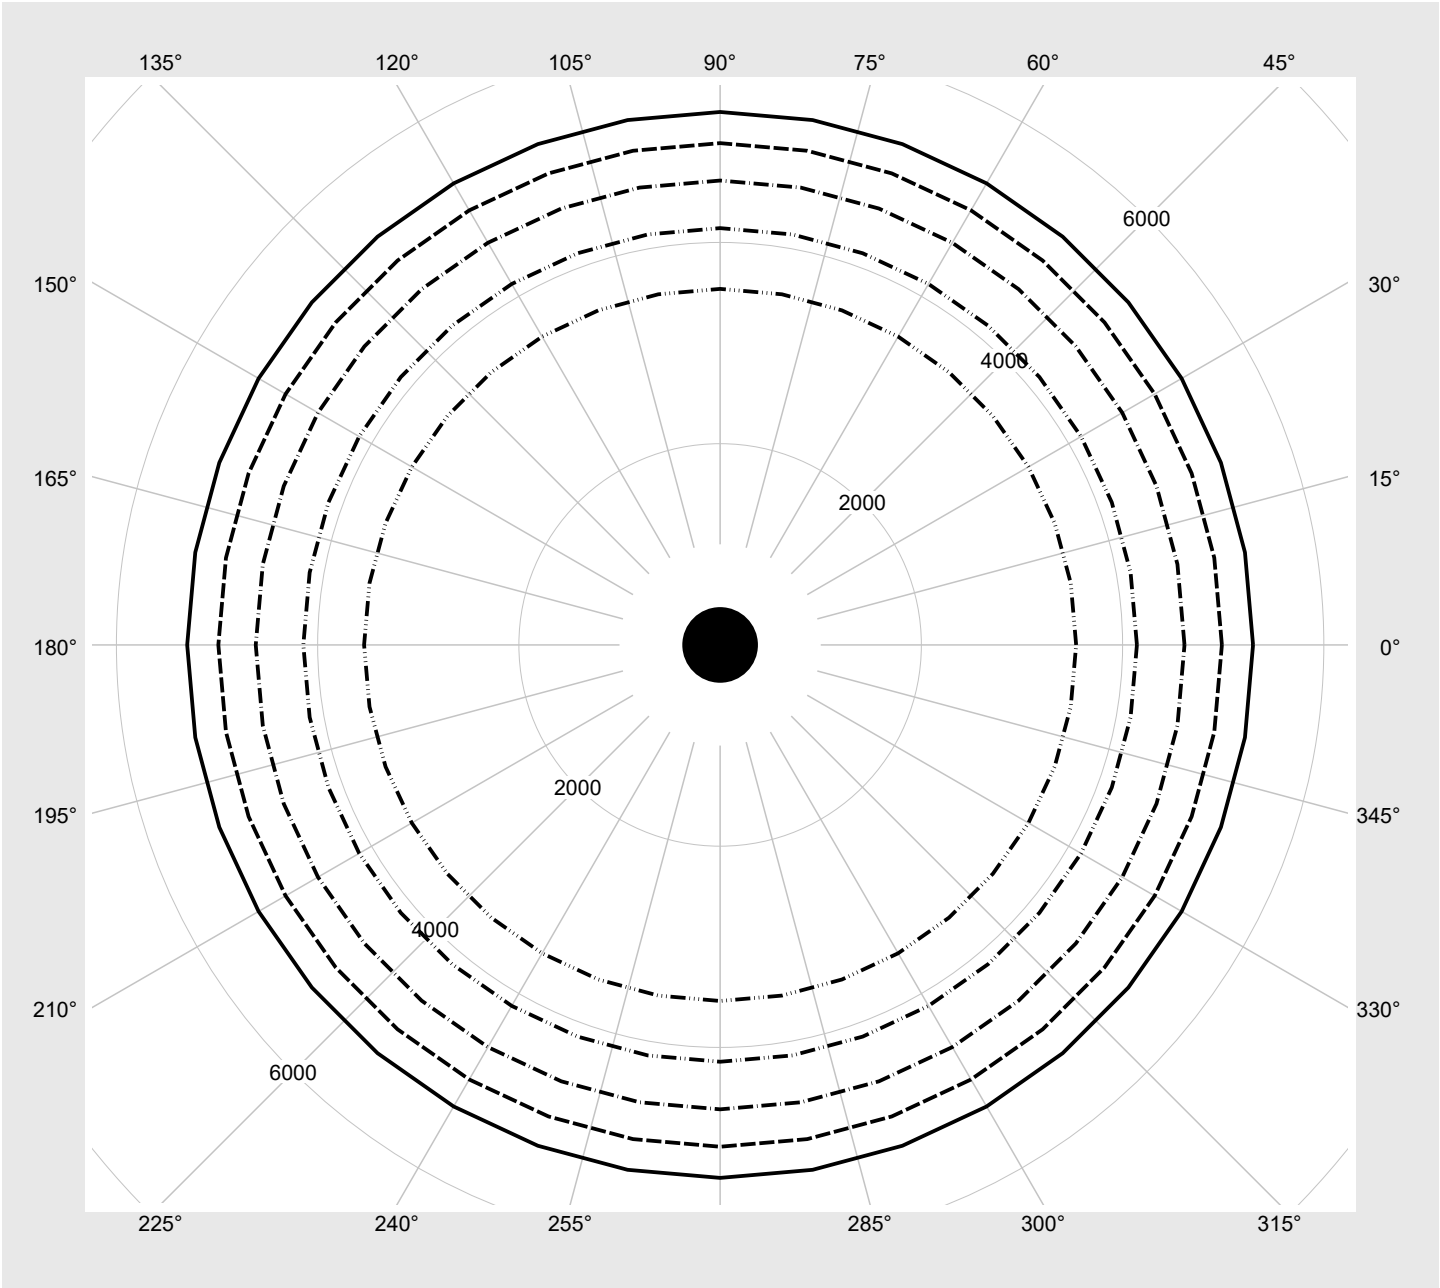

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DA4NSA EAN: 4069025810137	LP number 60071_41
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2190	14.7
95	241	252	2079	14.0
90	228	250	1968	13.3
85	216	248	1864	12.7
80	203	246	1753	12.0
75	190	243	1641	11.3
70	178	241	1537	10.7
65	165	238	1424	10.0
60	152	235	1312	9.2
55	140	232	1207	8.6
50	127	229	1093	7.9
45	115	225	989	7.2
40	102	221	875	6.4
35	90	216	769	5.8
30	77	210	654	5.1
25	65	204	548	4.4
20	53	197	442	3.7
15	40	186	326	3.0
10	28	173	219	2.2
5	16	153	111	1.4
4	14	148	93	1.2