


Photometric test report

Family Silica® 21 round S	Order number: 51MF61DADNWA EAN: 4069025810212	LP number 60071_6
	Version	surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution, UGR≤22
	Lamps	LED 3000 K CRI ≥ 90
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 2190 lm Power consumption = 15.1 W Luminous efficacy = 145 lm/W
		serial documentation 20.05.2026
		siteco

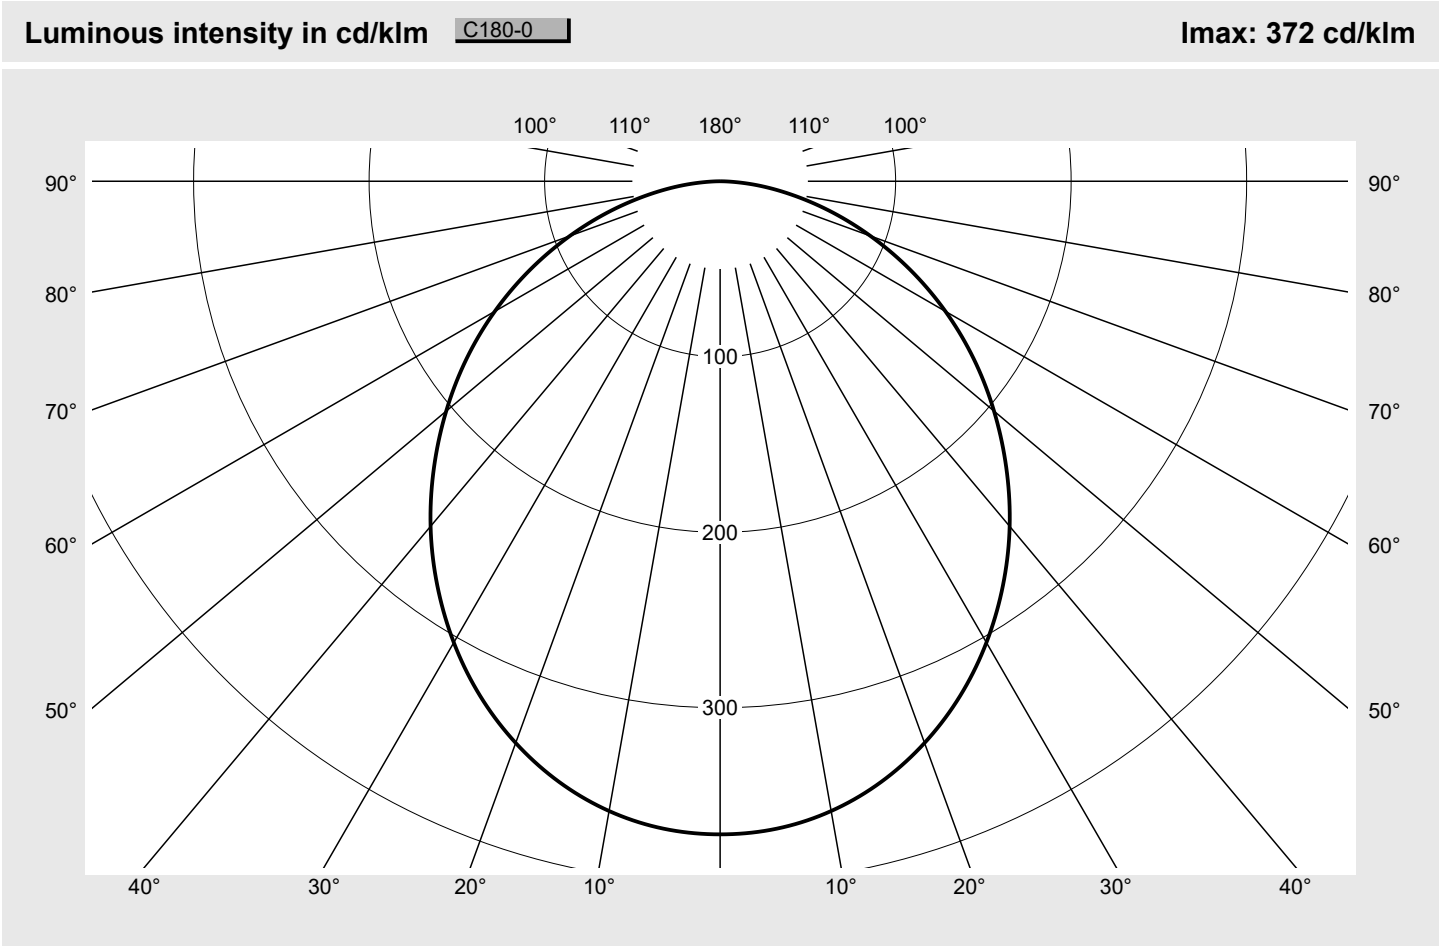

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=49 N2=79 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DADNWA EAN: 4069025810212	LP number 60071_6
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DADNWA EAN: 4069025810212	LP number 60071_6
------------------------------	--	----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	19.9	21.5	20.3	21.8	22.2	19.9	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 386
-----------------	---------------------------------	-------------------------------	---------

C-planes		0°
γ	Luminance in cd/m²	
45°	6102.0	
50°	5931.7	
55°	5755.5	
60°	5548.3	
65°	5296.6	
70°	4986.9	
75°	4615.2	
80°	4142.4	
85°	3538.5	

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DADNWA EAN: 4069025810212	LP number 60071_6
--	--	------------------------------------

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

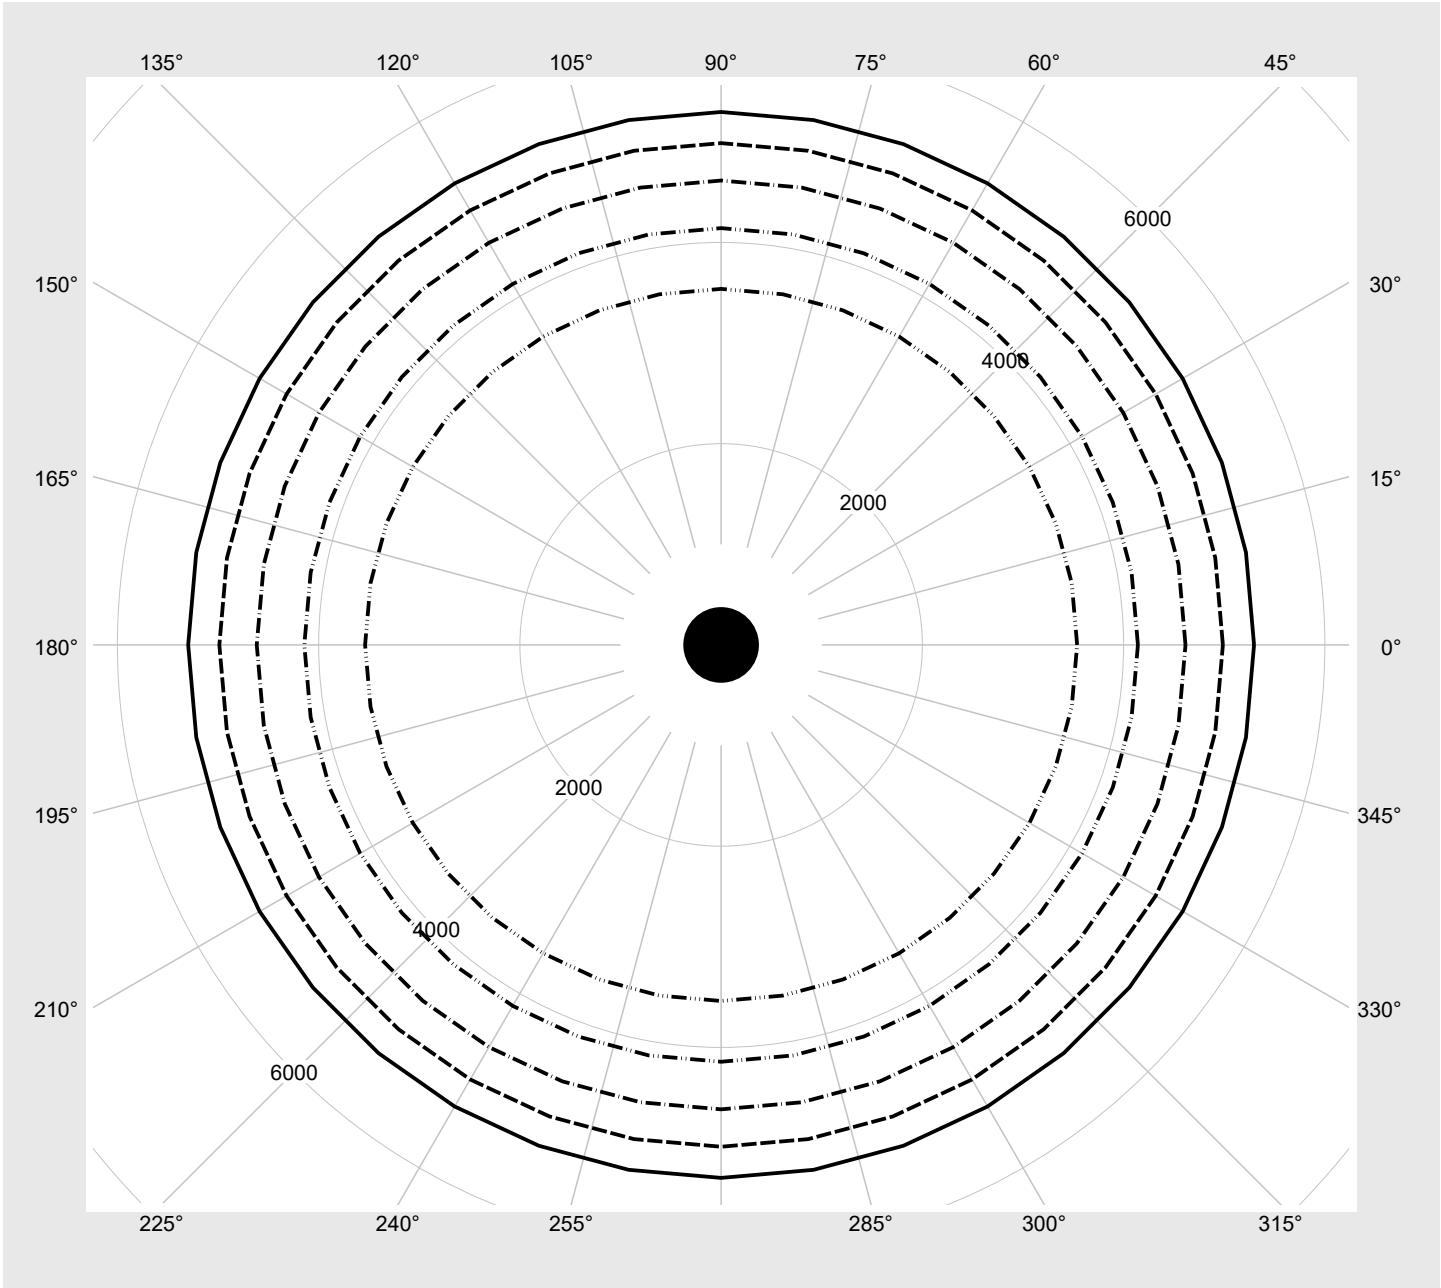

Photometric test report

Family Silica® 21 round S	Order number: 51MF61DADNWA EAN: 4069025810212	LP number 60071_6
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2190	15.1
95	241	252	2081	14.4
90	228	250	1972	13.6
85	215	248	1863	12.9
80	202	246	1752	12.2
75	189	243	1642	11.5
70	176	241	1531	10.8
65	163	238	1420	10.1
60	151	235	1317	9.4
55	138	232	1206	8.7
50	125	228	1093	7.9
45	113	224	989	7.2
40	100	220	877	6.5
35	87	215	763	5.8
30	75	209	658	5.1
25	62	202	545	4.3
20	50	194	439	3.6
15	37	183	324	2.8
10	25	169	218	2.0
5	14	148	120	1.2