

Photometric test report

Family
Silica® 21 round M

Order number: 51MF61DB3NBA
EAN: 4069025810298

LP number
60071_28

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, black, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 5060 lm
Power consumption = 31.9 W
Luminous efficacy = 158.6 lm/W

siteco

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

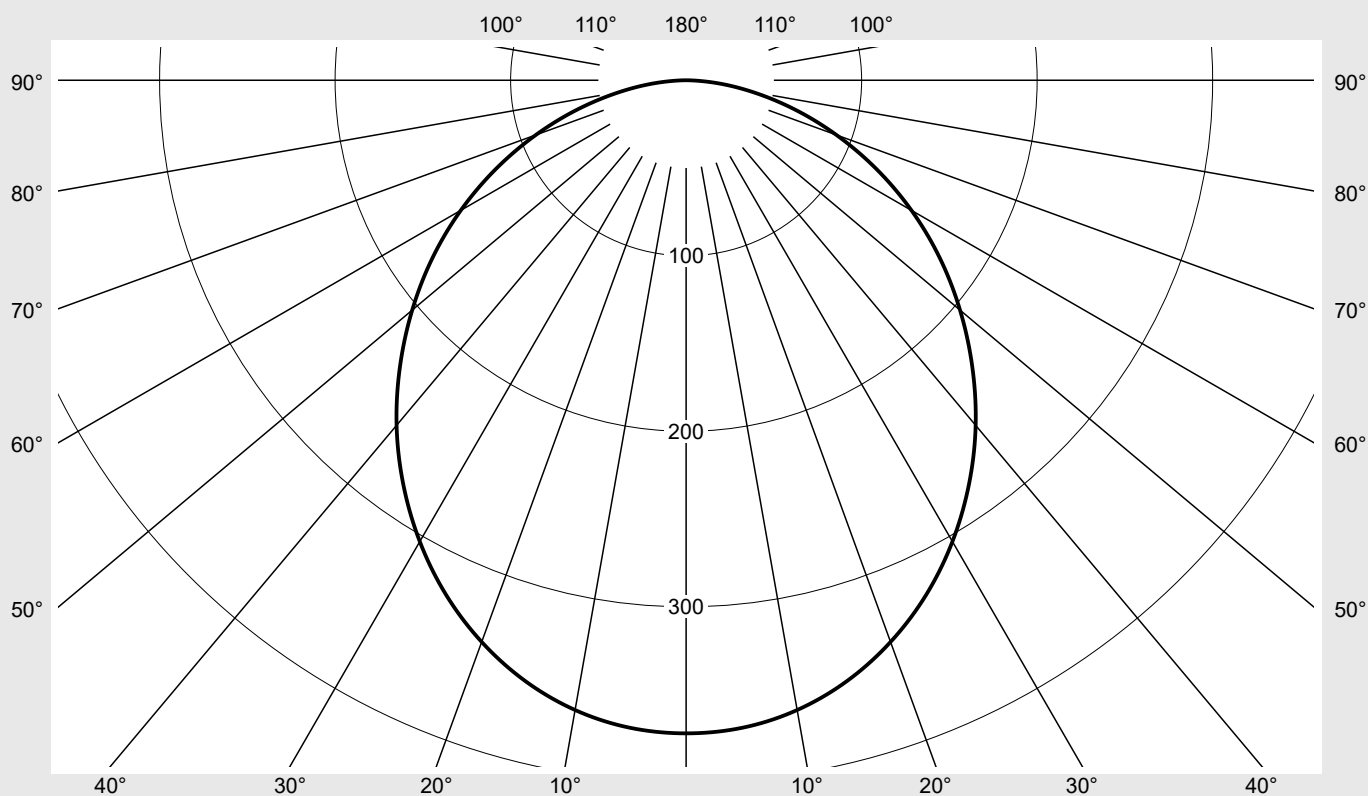

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF61DB3NBA EAN: 4069025810298	LP number 60071_28
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51MF61DB3NBA EAN: 4069025810298							LP number 60071_28	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
C-planes	0°			
γ	Luminance in cd/m²			
45°	6117.2			
50°	5946.5			
55°	5769.9			
60°	5562.2			
65°	5309.9			
70°	4999.4			
75°	4626.8			
80°	4152.7			
85°	3547.3			

Photometric test report

Family
Silica® 21 round M

Order number: 51MF61DB3NBA
EAN: 4069025810298

LP number
60071_28

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

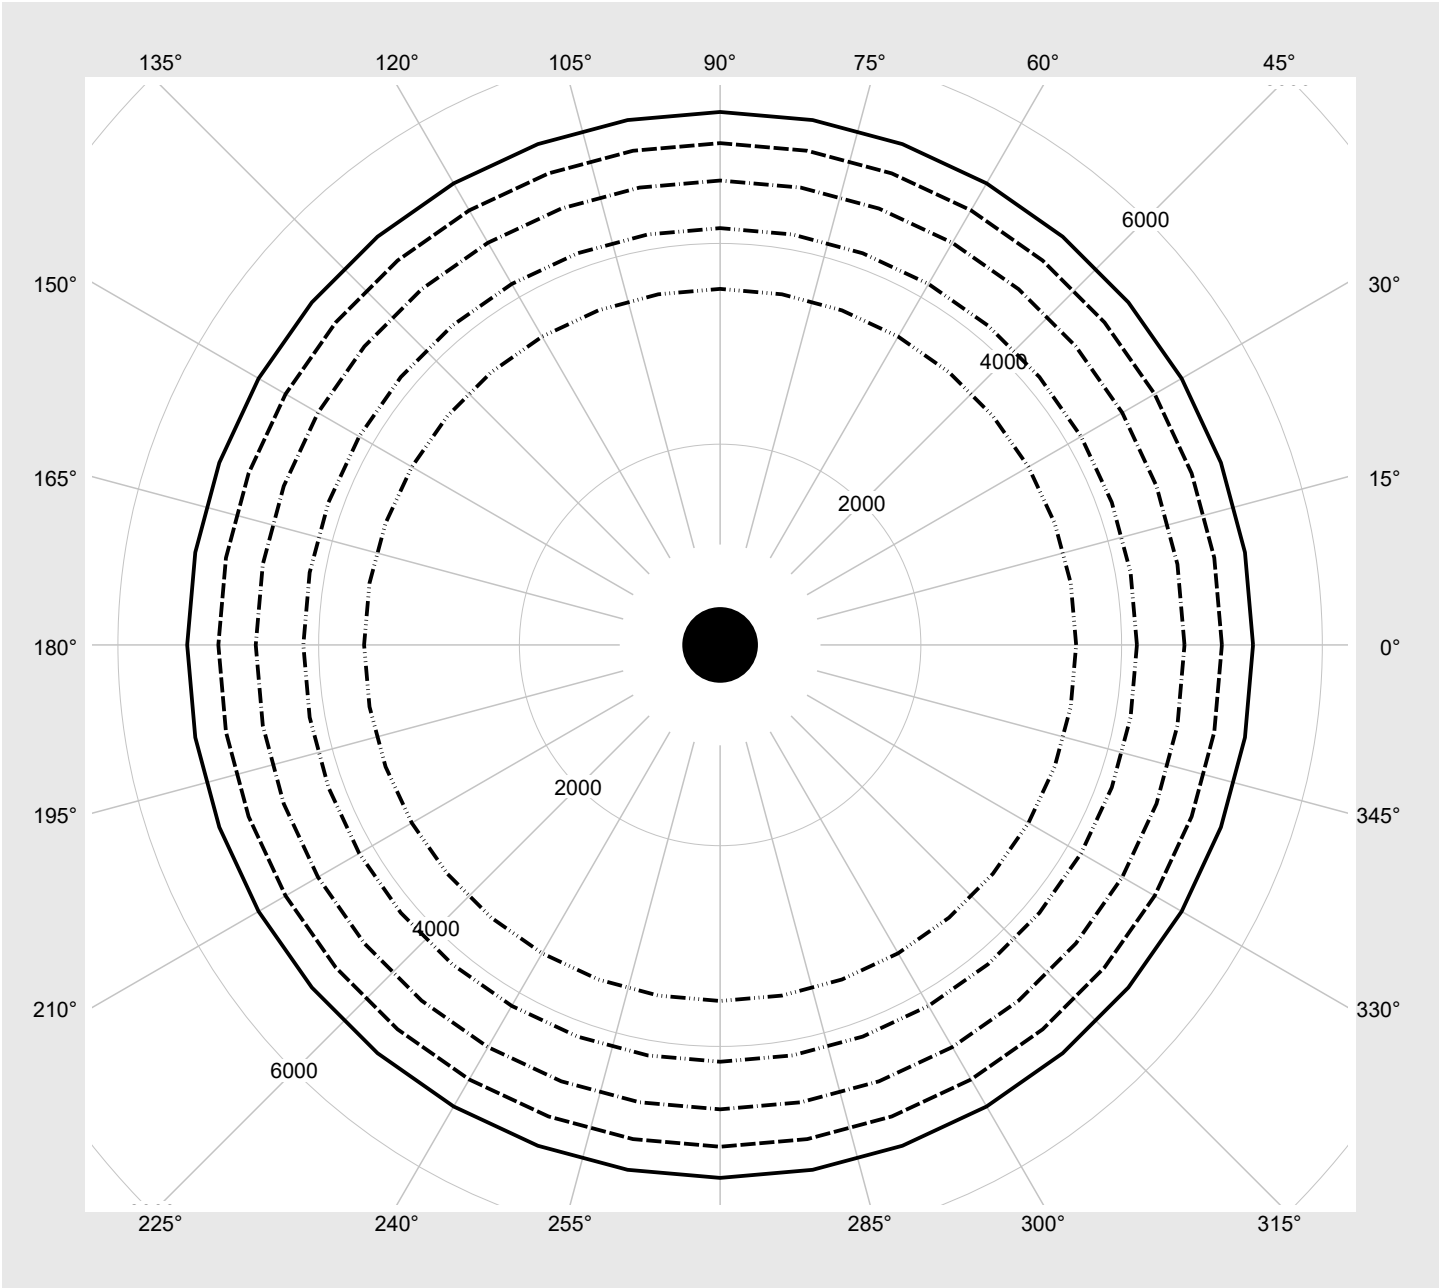

Photometric test report

Family Silica® 21 round M	Order number: 51MF61DB3NBA EAN: 4069025810298	LP number 60071_28
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5060	31.9
95	241	252	4805	30.3
90	228	250	4550	28.7
85	215	248	4294	27.1
80	203	246	4056	25.7
75	190	243	3799	24.1
70	177	241	3540	22.5
65	164	238	3281	21.0
60	152	235	3041	19.6
55	139	232	2781	18.0
50	127	229	2539	16.5
45	114	225	2277	15.1
40	102	221	2034	13.7
35	89	216	1770	12.3
30	77	210	1526	10.8
25	64	204	1261	9.3
20	52	196	1016	7.8
15	39	185	751	6.1
10	27	172	505	4.5
5	15	150	258	3.1
2	7	122	93	2.1