

Photometric test report

Family
Silica® 21 round M

Order number: 51MF61DBENBA
EAN: 4069025810472

LP number
60071_31

serial
documentation
20.05.2026

siteco



Version surface-mounted luminaire, housing, black, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 4000 K | CRI ≥ 90


Controlgear ECG-DALI

Rated values Net luminous flux = 5060 lm
Power consumption = 33.2 W
Luminous efficacy = 152.4 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

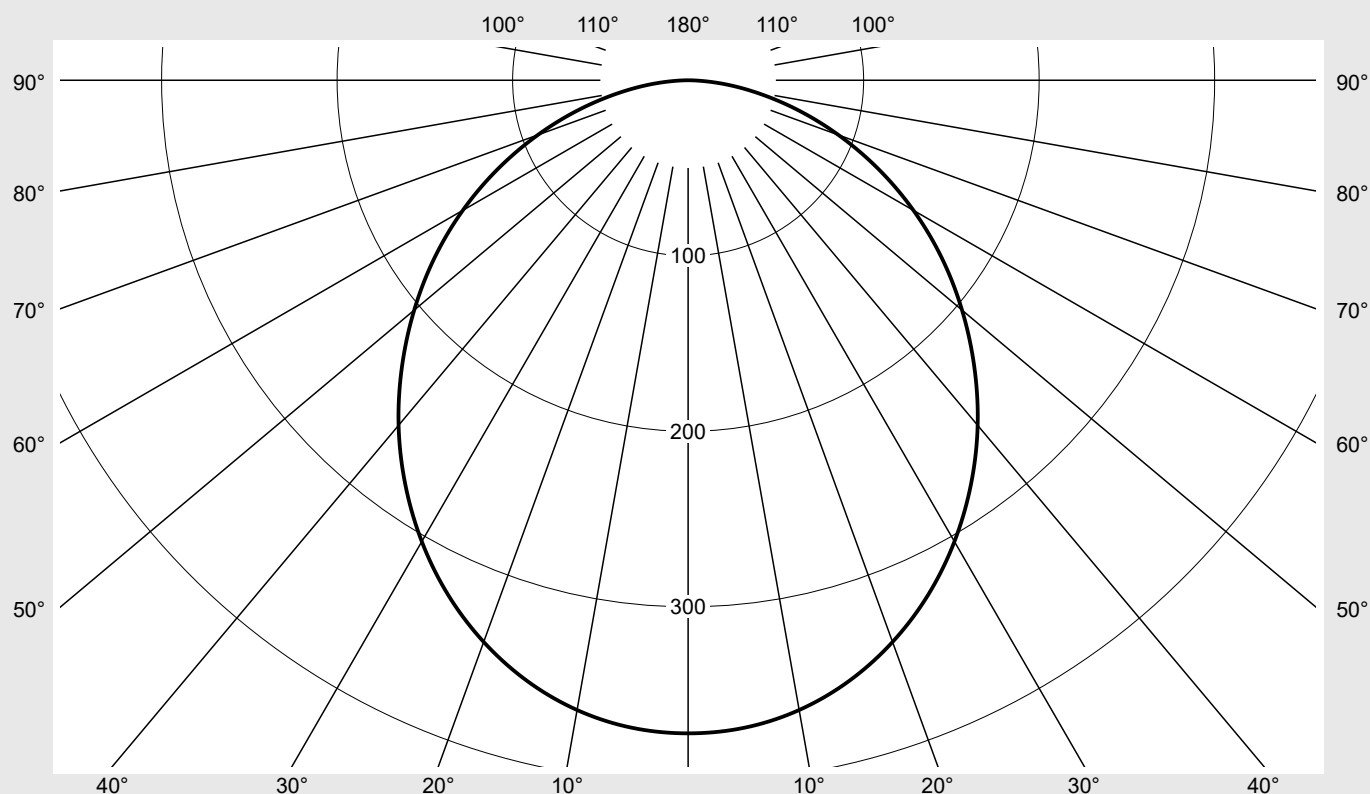

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF61DBENBA EAN: 4069025810472	LP number 60071_31
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51MF61DBENBA EAN: 4069025810472	LP number 60071_31
------------------------------	--	-----------------------

UGR-Table		Standard room									sīTeco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7	
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2	
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7	
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1	
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3	
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3	
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3	
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9	
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6	
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1	
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2	
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3	
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8	
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4	
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6	
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8	
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7	
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4	
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7	

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
-----------------	---------------------------------	-------------------------------	---------

C-planes		0°
γ	Luminance in cd/m²	
45°	6117.2	
50°	5946.5	
55°	5769.9	
60°	5562.2	
65°	5309.9	
70°	4999.4	
75°	4626.8	
80°	4152.7	
85°	3547.3	

Photometric test report

Family
Silica® 21 round M

Order number: 51MF61DBENBA
EAN: 4069025810472

LP number
60071_31

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

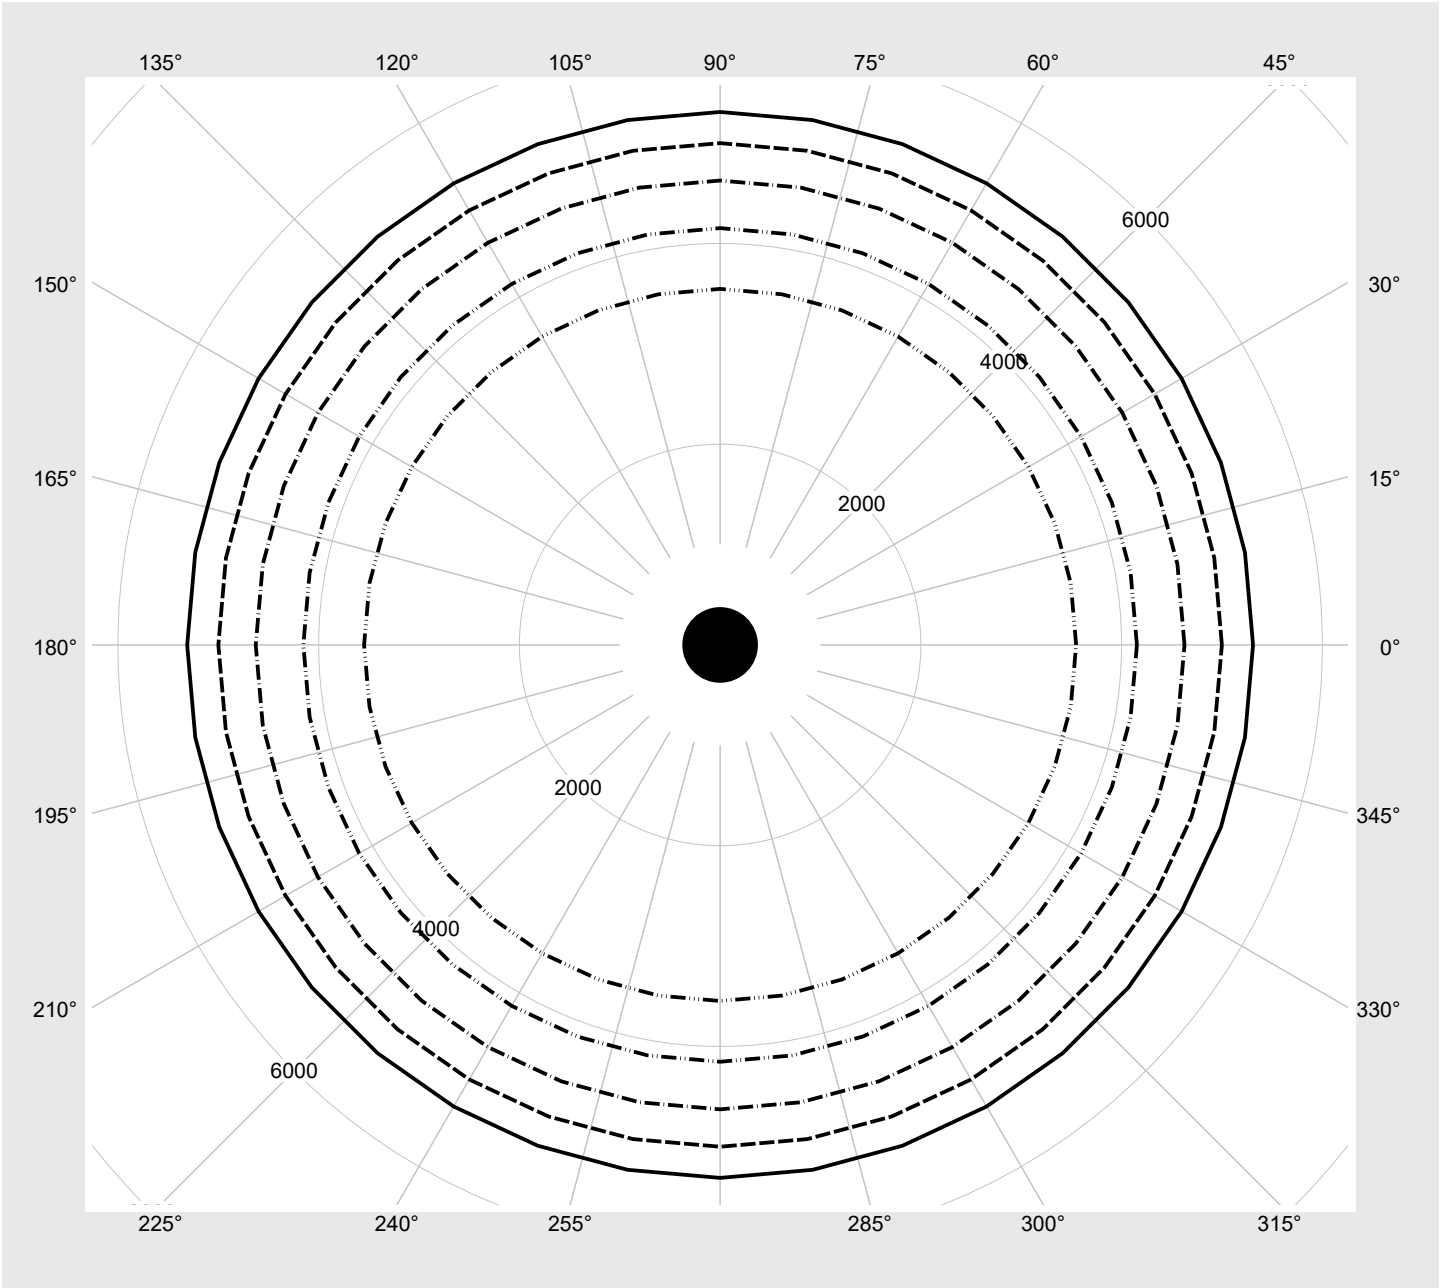

Photometric test report

Family Silica® 21 round M	Order number: 51MF61DBENBA EAN: 4069025810472	LP number 60071_31
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5060	33.2
95	241	252	4810	31.6
90	228	250	4559	29.9
85	215	248	4306	28.2
80	202	246	4054	26.6
75	189	243	3800	24.9
70	176	241	3545	23.3
65	163	238	3288	21.6
60	150	235	3031	20.0
55	138	232	2792	18.5
50	125	228	2532	16.9
45	112	224	2272	15.3
40	100	220	2031	13.8
35	87	215	1768	12.4
30	75	209	1525	10.9
25	62	202	1261	9.3
20	50	194	1017	7.8
15	37	183	751	6.0
10	25	169	505	4.4
5	13	145	258	2.9
2	6	117	113	2.0