

Photometric test report

Family
Silica® 21 round M

Order number: 51MF63DB4MSA
EAN: 4069025811097

LP number
59826_818

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, silver,
microprismatic optics, direct wide distribution,
UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 5560 lm
Power consumption = 32.5 W
Luminous efficacy = 171.1 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 487 cd/klm

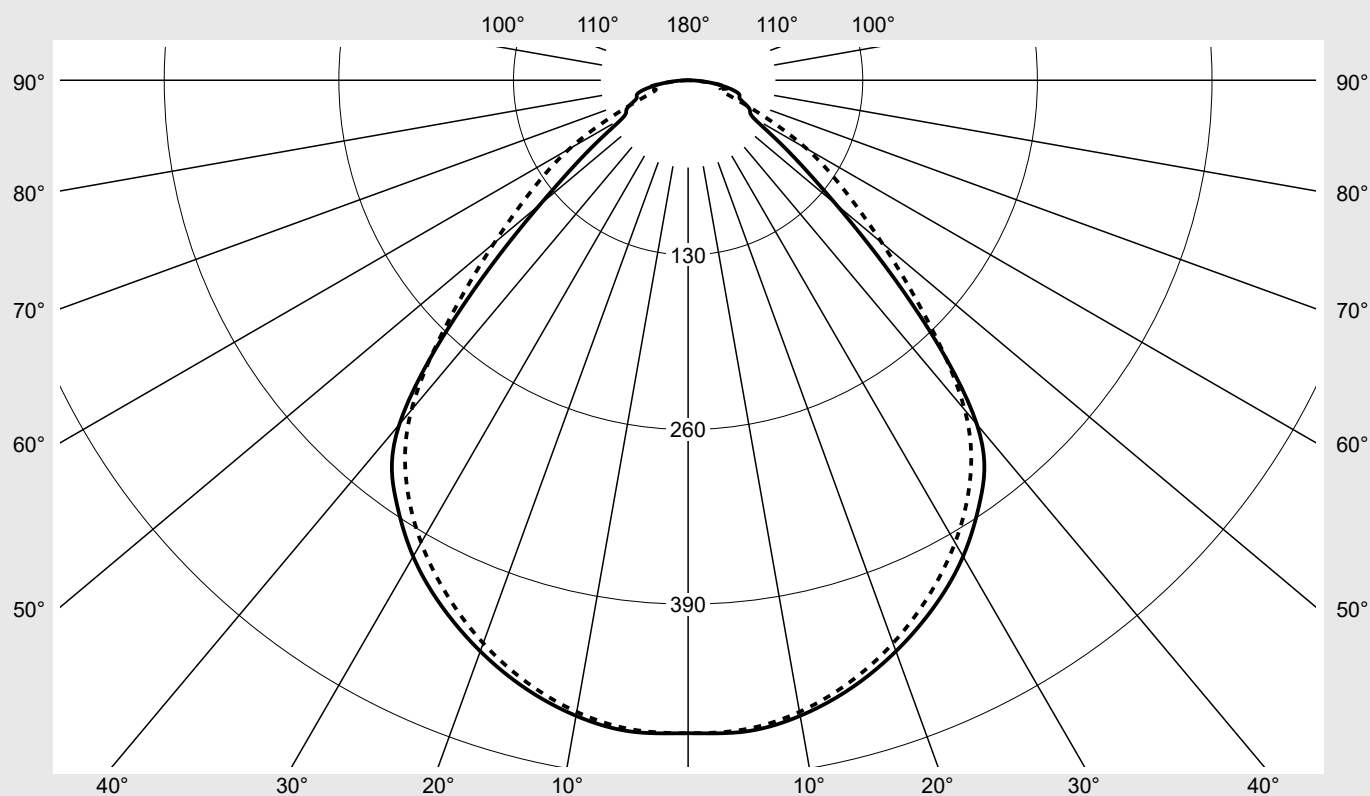

Classifications

DIN 5040 A 5 0
CIE N1=64 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF63DB4MSA EAN: 4069025811097	LP number 59826_818
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M		Order number: 51MF63DB4MSA EAN: 4069025811097							LP number 59826_818	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6895.8	7339.3	7445.2	7302.1	6664.0	7287.8	7322.1
50°	4609.4	5288.0	6174.1	5284.9	4578.8	5204.1	6040.3
55°	3183.9	3637.3	5154.5	3621.4	3154.6	3542.8	5068.9
60°	2326.8	2819.0	4150.5	2850.0	2319.7	2782.0	4199.5
65°	2456.9	2852.1	3038.8	2922.3	2518.2	2923.4	2874.8
70°	2492.3	3038.3	1924.6	3095.1	2506.2	3101.0	1901.3
75°	3112.9	2800.5	2222.8	2861.5	3157.8	2840.1	2038.0
80°	3329.9	2521.3	3290.4	2448.6	3368.4	2569.8	3510.6
85°	3096.7	2895.9	2444.6	2905.3	3079.4	2966.8	2458.3

Photometric test report

Family
Silica® 21 round M

Order number: 51MF63DB4MSA
EAN: 4069025811097

LP number
59826_818

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

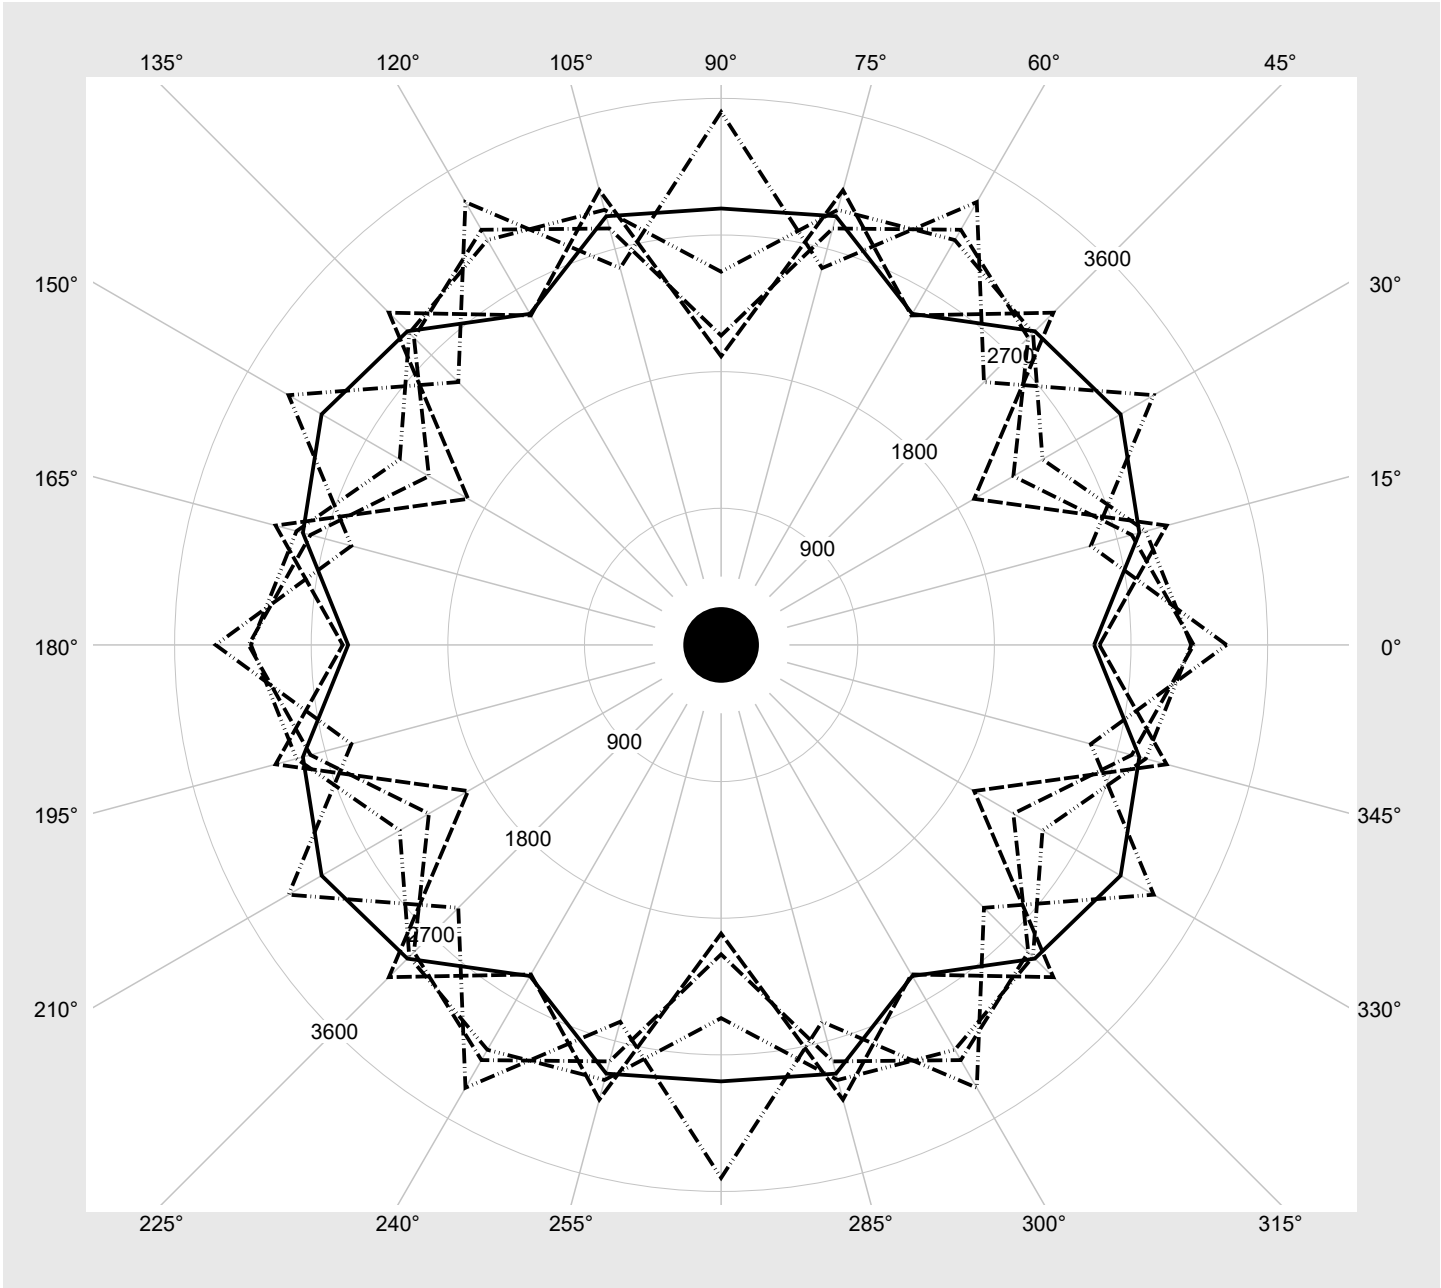

Photometric test report

Family Silica® 21 round M	Order number: 51MF63DB4MSA EAN: 4069025811097	LP number 59826_818
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5560	32.5
95	241	252	5279	31.0
90	228	250	4998	29.3
85	215	248	4715	27.7
80	203	246	4455	26.2
75	190	243	4171	24.6
70	177	241	3887	23.0
65	165	238	3622	21.5
60	152	235	3336	20.0
55	139	232	3049	18.3
50	127	229	2783	16.9
45	114	225	2493	15.3
40	102	221	2225	13.9
35	90	216	1957	12.6
30	77	210	1665	11.0
25	65	204	1395	9.6
20	52	196	1102	8.0
15	40	186	831	6.3
10	28	173	558	4.7
5	16	153	285	3.3
1	6	117	57	2.0