


Photometric test report

Family Silica® 21 round L	Order number: 51MF63DC4MBA EAN: 4069025811318	LP number 59826_806
	Version	surface-mounted luminaire, housing, black, microprismatic optics, direct wide distribution, UGR≤19
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 12730 lm Power consumption = 73.8 W Luminous efficacy = 172.5 lm/W
		serial documentation 20.05.2026
		

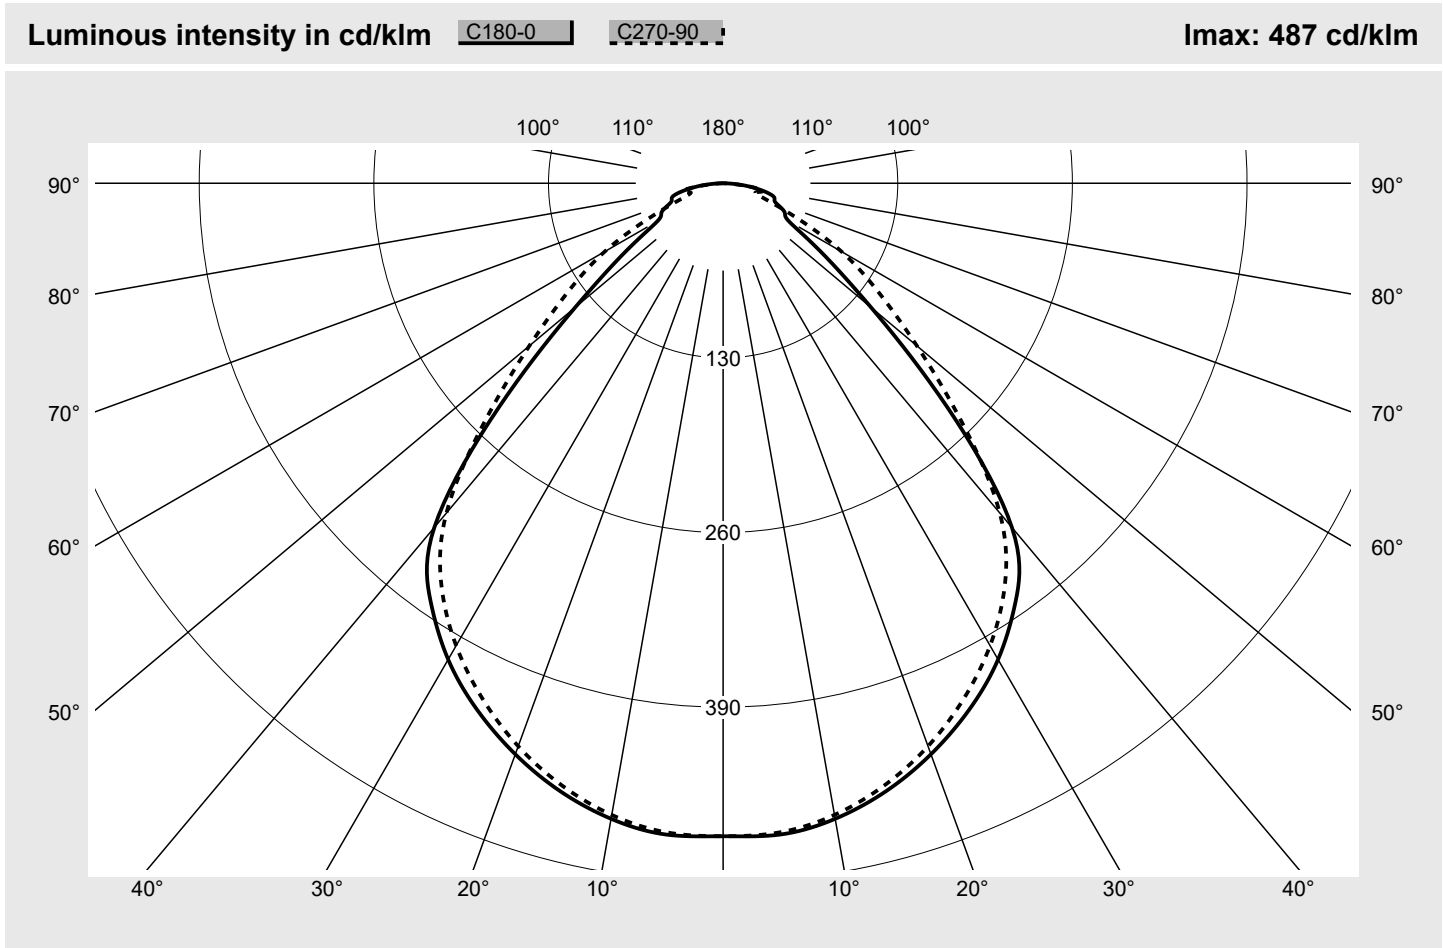

Classifications		Luminaire light output ratios	
DIN 5040	A 5 0	η_{LB}	100.0%
CIE	N1=64 N2=89 N3=97	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51MF63DC4MBA EAN: 4069025811318	LP number 59826_806
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round L	Order number: 51MF63DC4MBA EAN: 4069025811318	LP number 59826_806
------------------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.6	19.5	19.0	19.9	20.4
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 886	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6906.6	7350.8	7456.9	7313.5	6674.5	7299.2	7333.6
50°	4616.6	5296.3	6183.8	5293.2	4586.0	5212.3	6049.8
55°	3188.9	3643.0	5162.6	3627.1	3159.6	3548.4	5076.9
60°	2330.4	2823.4	4157.0	2854.5	2323.3	2786.4	4206.1
65°	2460.8	2856.6	3043.6	2926.8	2522.2	2928.0	2879.4
70°	2496.2	3043.1	1927.7	3099.9	2510.1	3105.8	1904.2
75°	3117.7	2804.9	2226.3	2866.0	3162.7	2844.5	2041.2
80°	3335.2	2525.3	3295.6	2452.4	3373.7	2573.8	3516.1
85°	3101.6	2900.4	2448.4	2909.9	3084.3	2971.5	2462.2

Photometric test report

Family
Silica® 21 round L

Order number: 51MF63DC4MBA
EAN: 4069025811318

LP number
59826_806

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

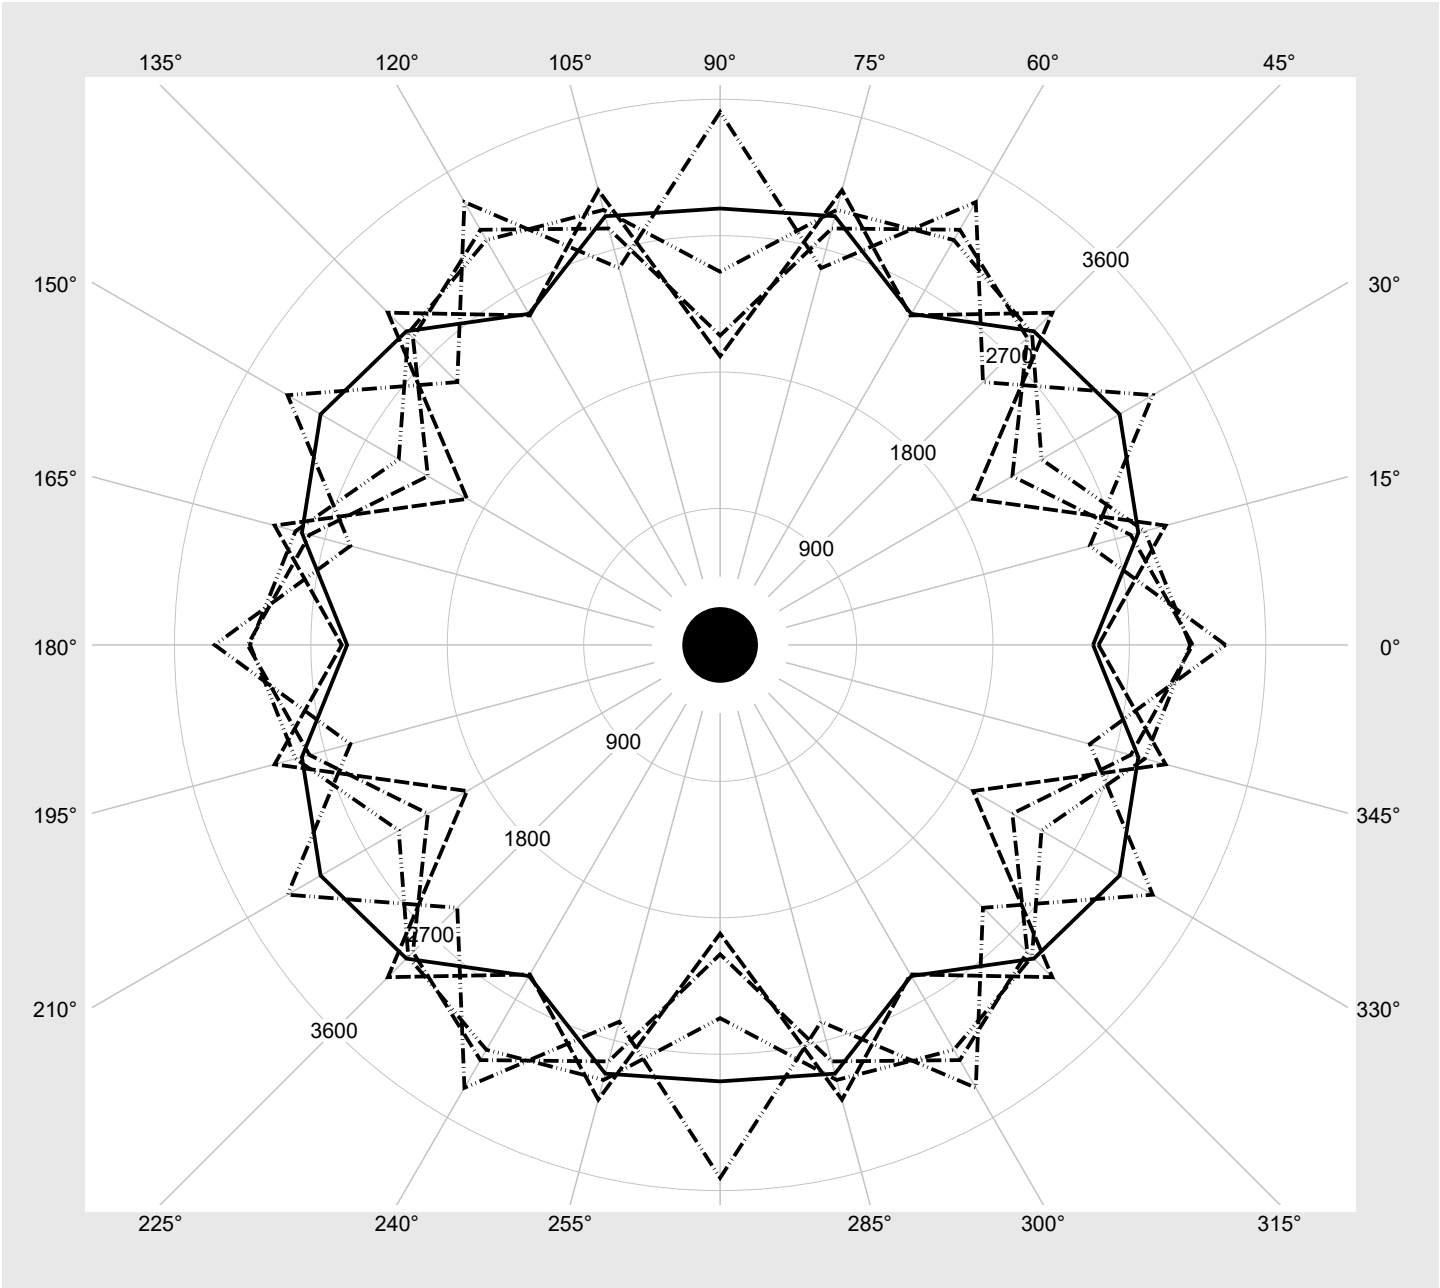

Photometric test report

Family Silica® 21 round L	Order number: 51MF63DC4MBA EAN: 4069025811318	LP number 59826_806
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	12730	73.8
95	241	252	12091	70.0
90	228	250	11451	66.2
85	215	248	10806	62.5
80	202	246	10161	58.8
75	190	243	9563	55.4
70	177	241	8912	51.7
65	164	238	8259	48.1
60	152	235	7655	44.6
55	139	232	6999	41.0
50	126	228	6340	37.3
45	114	225	5730	34.0
40	101	220	5067	30.3
35	89	216	4453	27.1
30	77	210	3836	23.7
25	64	204	3165	20.2
20	52	196	2544	16.9
15	40	186	1921	13.7
10	28	173	1296	10.6
5	15	150	617	7.0
0	3	91	-12	3.4