


Licross®

Einspeiser IP64

Feed In IP64




59TP1FN .

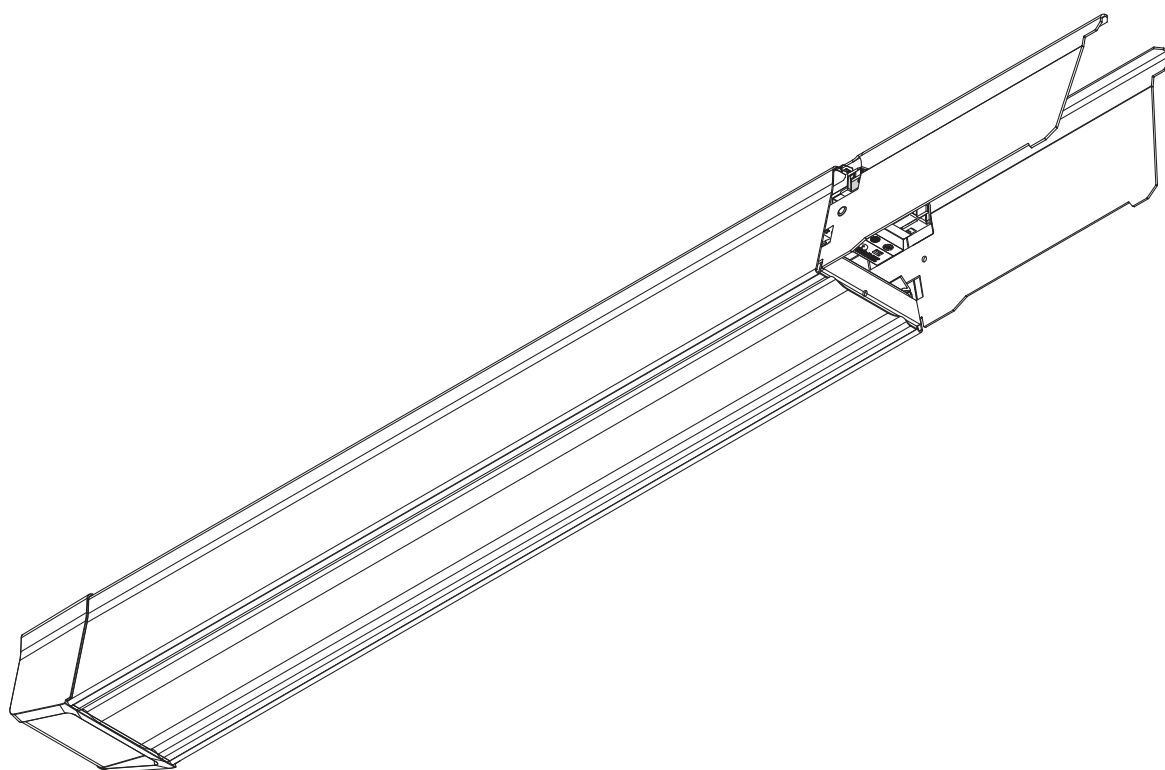

siteco






59TP1FN7

[mm]

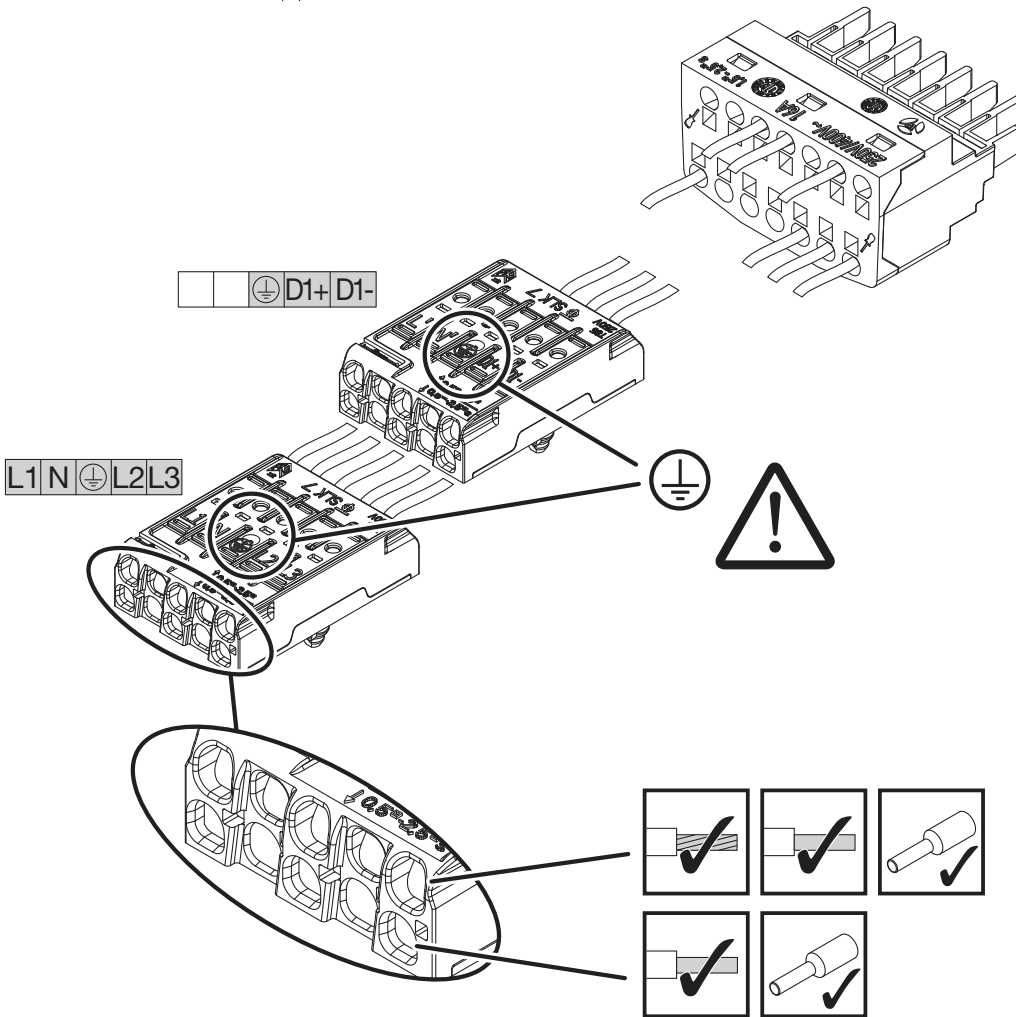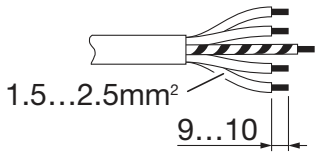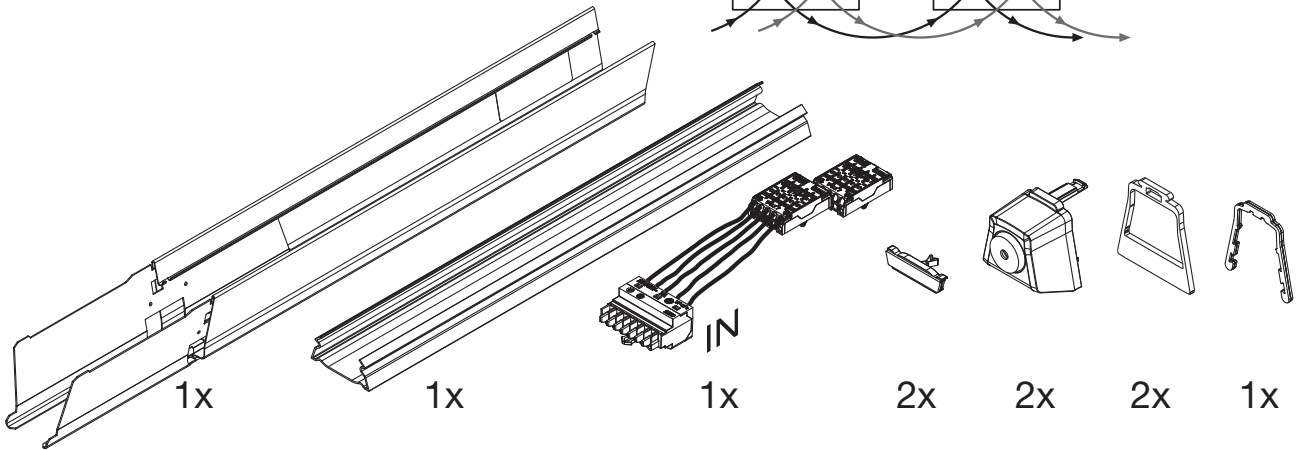

kg = 0.9


59TP1FNE

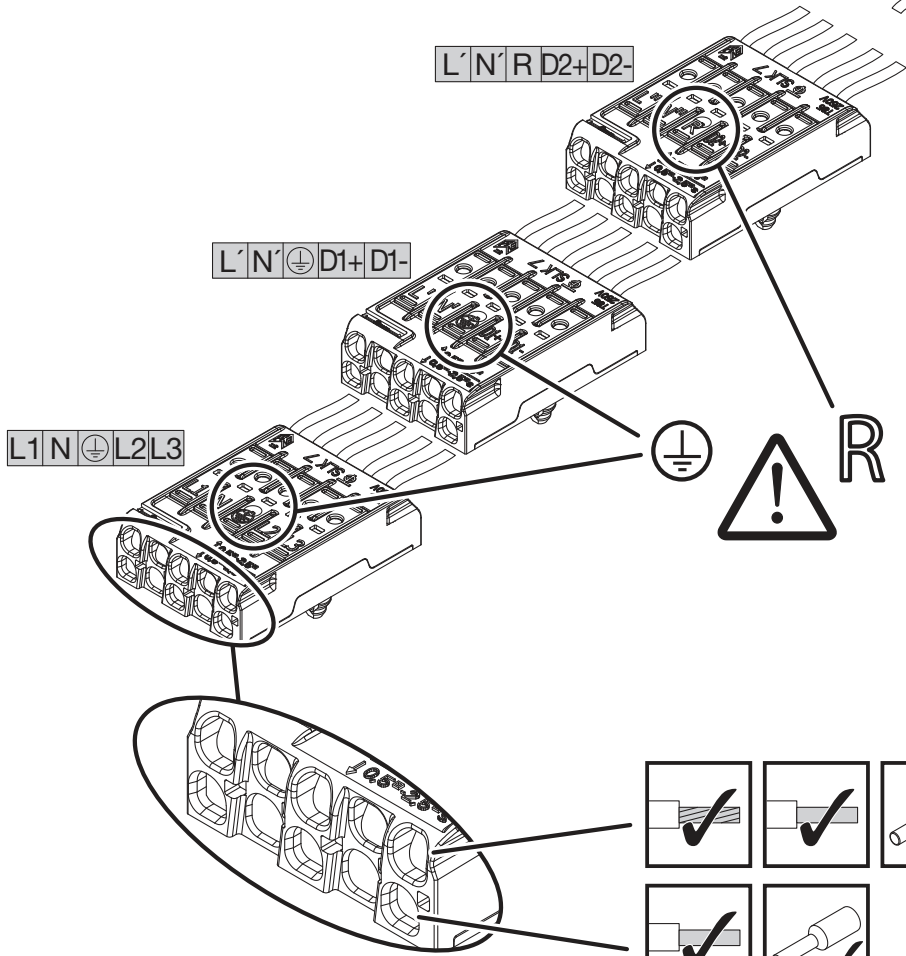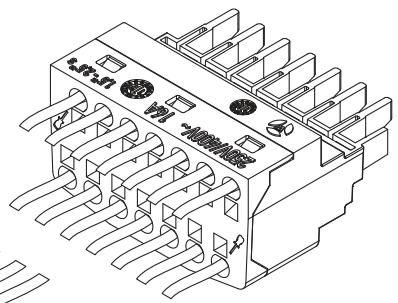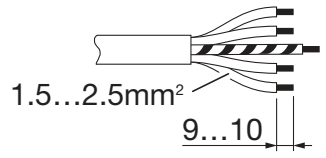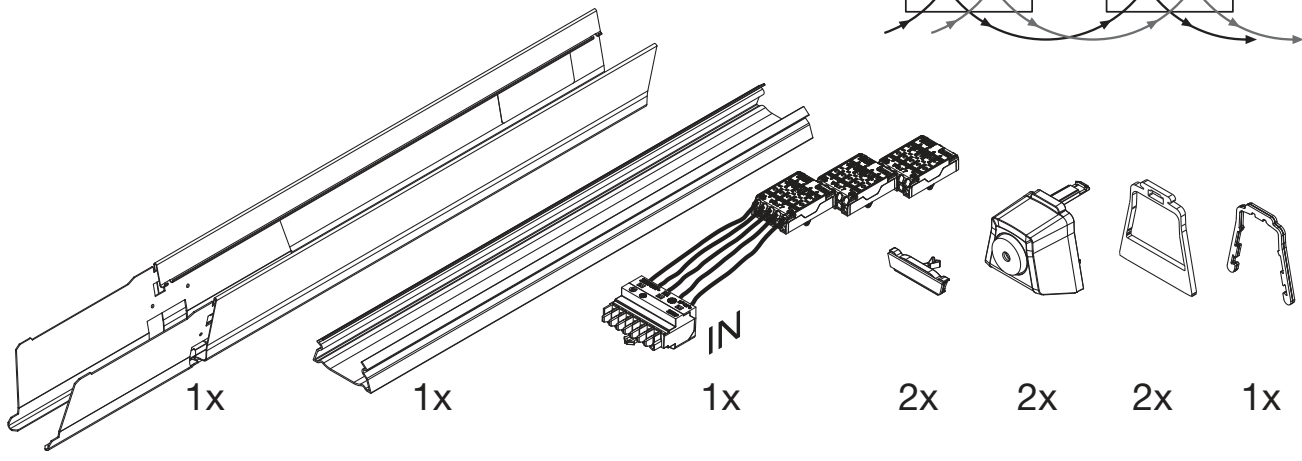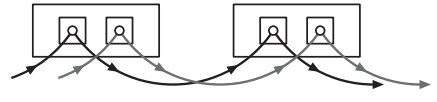


kg = 1.0

[mm]



59TP . FN7

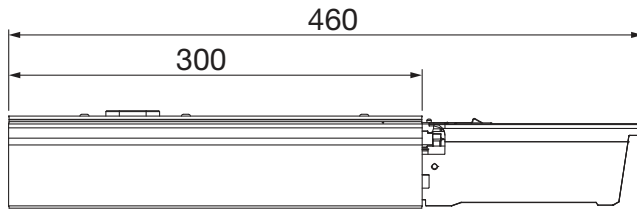


59TP . FNE

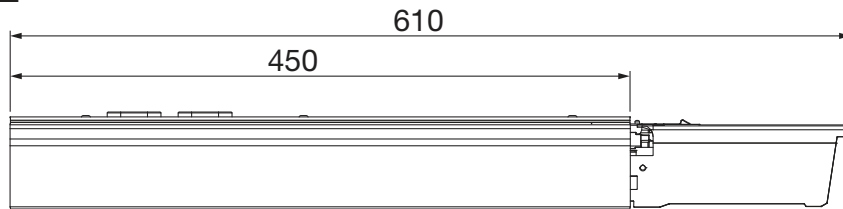


1 Umgebungstemperatur während der Installation: +5°C...+40°C
Ambient temperature during installation:

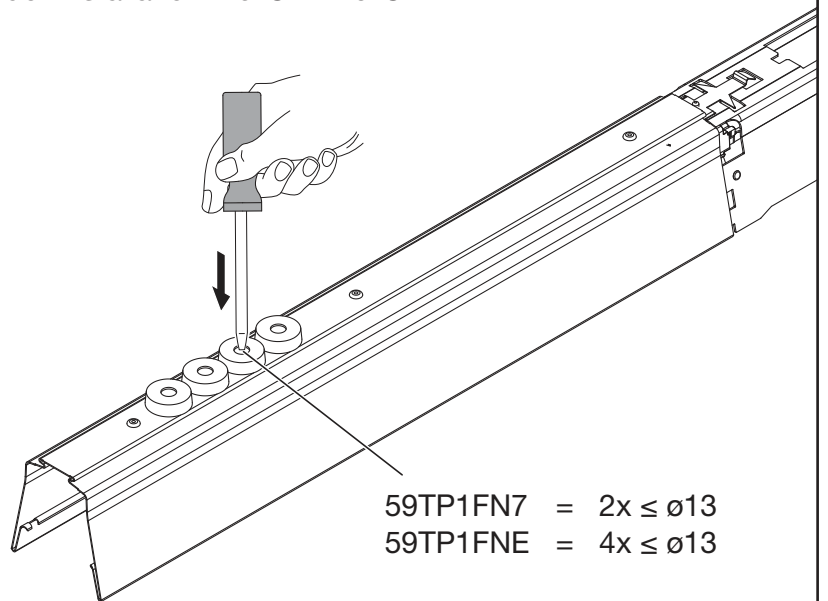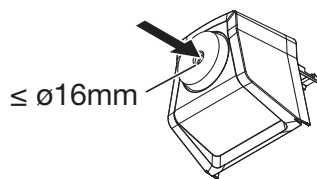



2

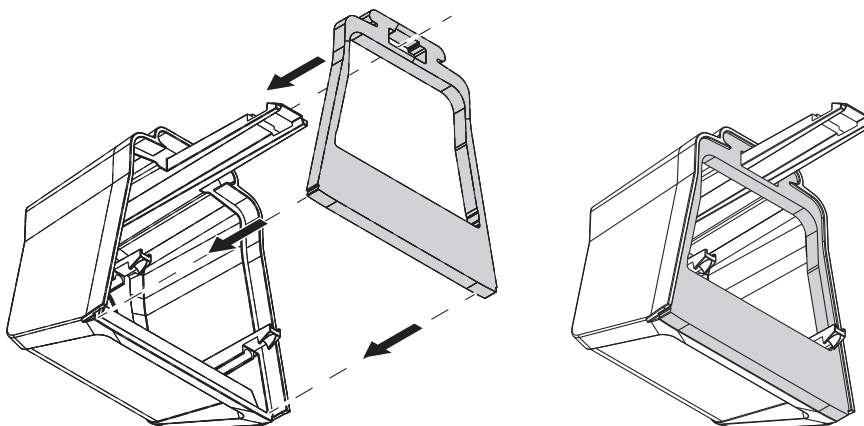

4

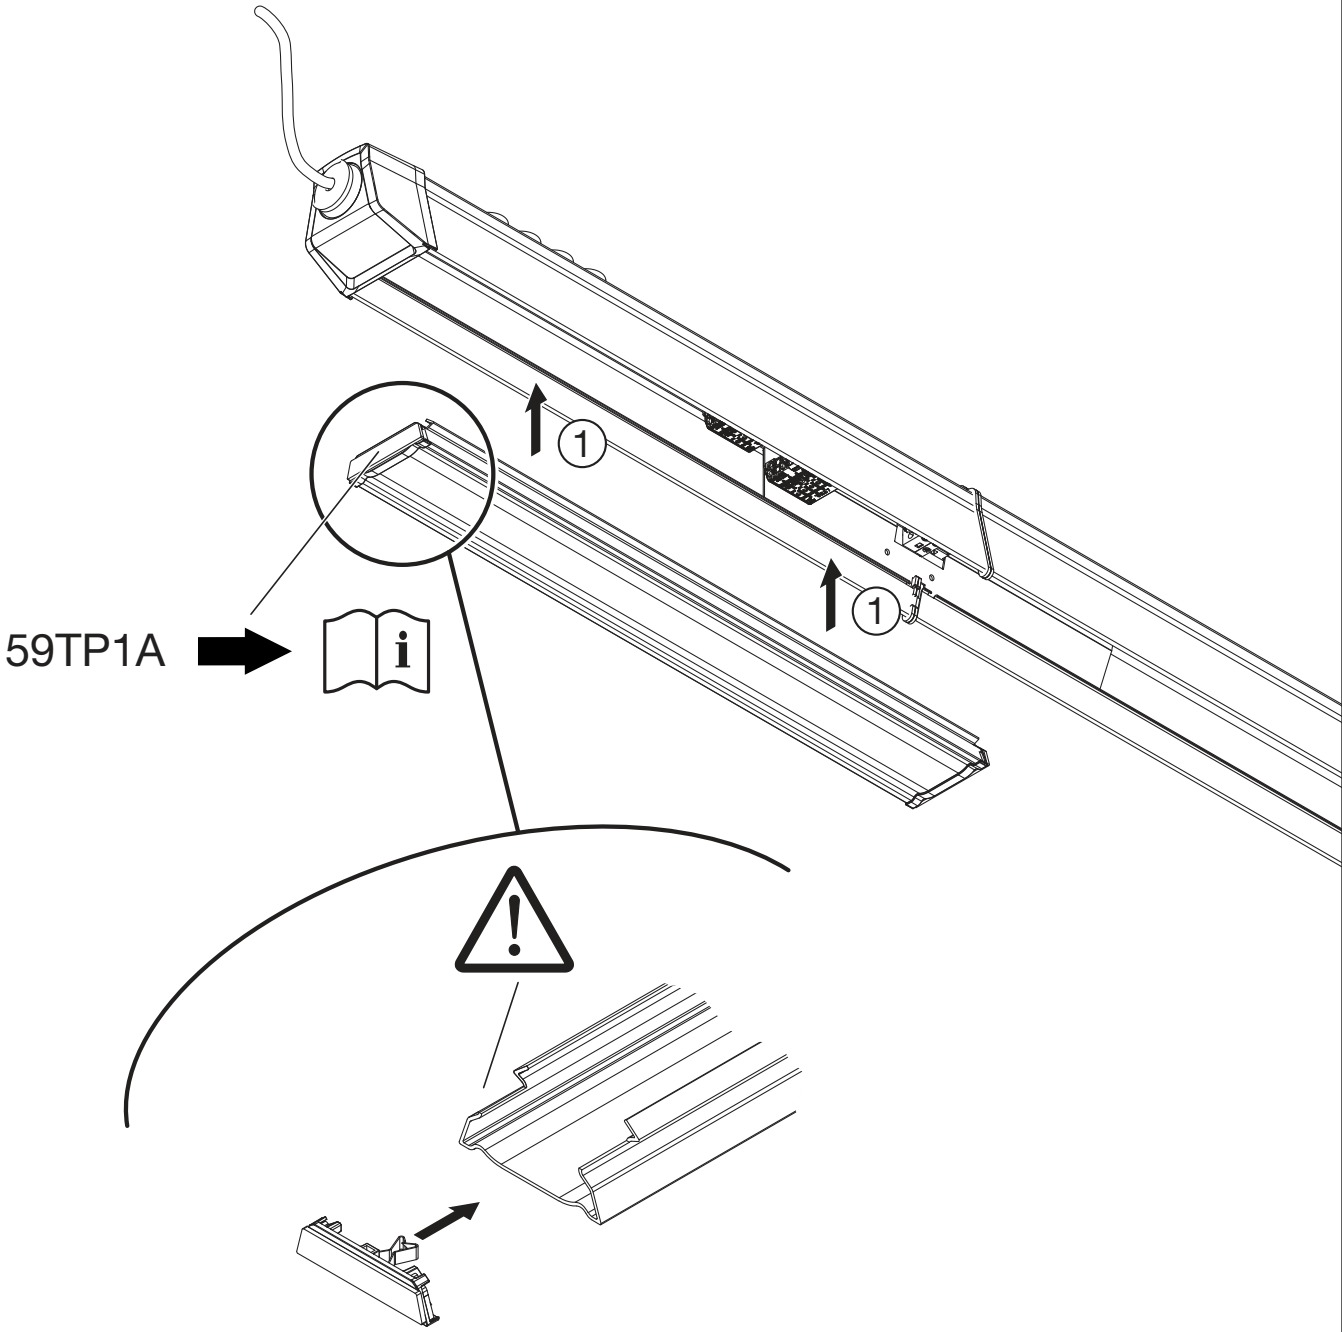

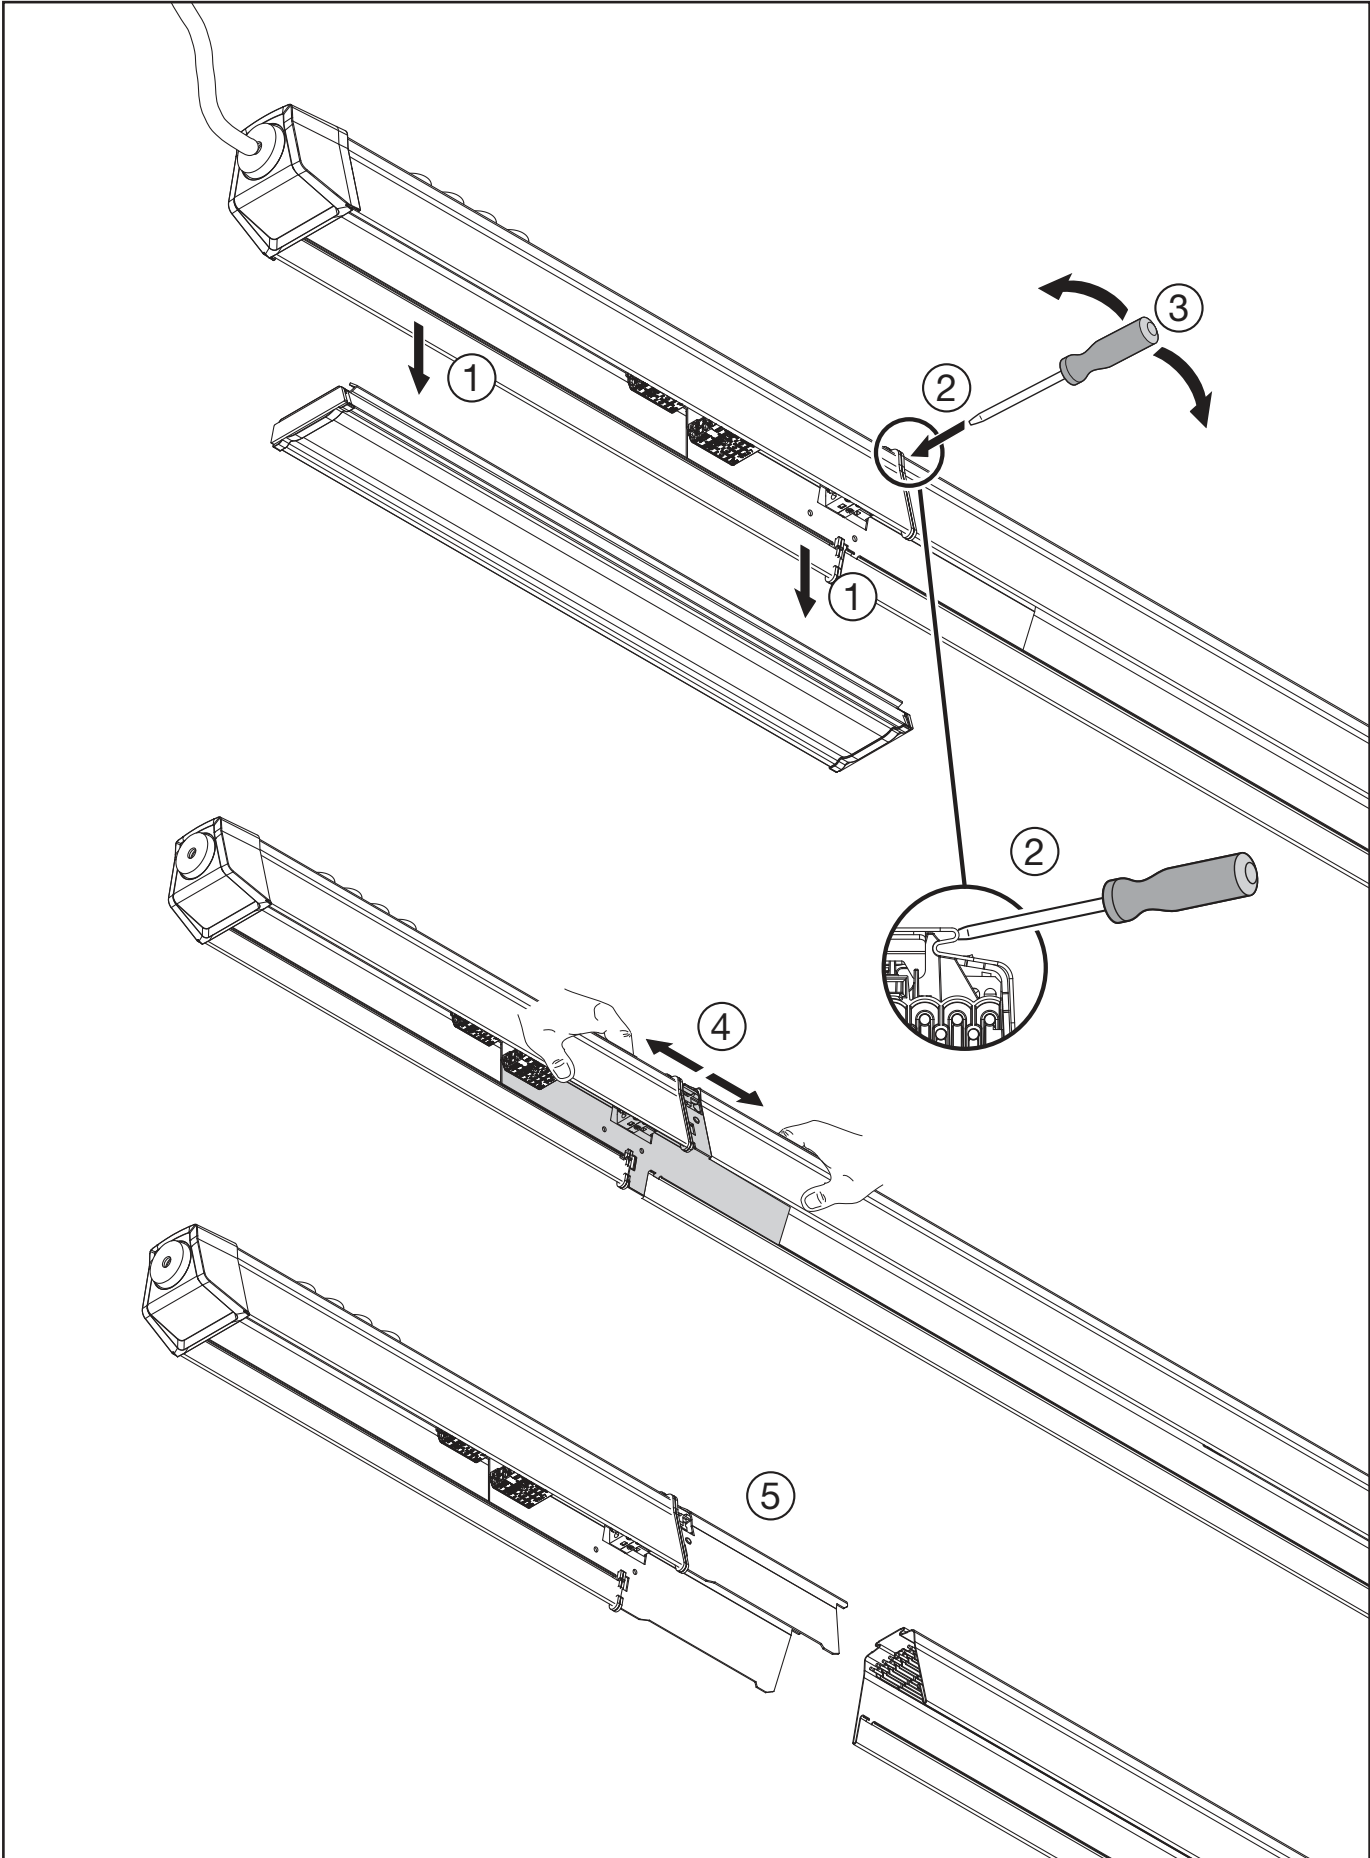



5MA14-255455_ag
07.03.2023 / AZ

Siteco GmbH
Georg-Simon-Ohm-Straße 50
83301 Traunreut, Germany
mail: technicalsupport@siteco.de
Phone: +49 8669 / 33-844
www.siteco.com