


Photometric test report

Family Spot 21	Order number: 51SE63MBA5B EAN: 4058352769911	LP number 59385_7
Version	reflector, cover panel, PC, medium distribution	serial documentation 14.02.2023
Lamps	LED 2700 K CRI ≥ 90	
Controlgear	ECG Multilumen	
Setting	factory setting: DIP-Step=14	
Rated values	Net luminous flux = 5090 lm Power consumption = 39.8 W Luminous efficacy = 127.9 lm/W	



Luminous intensity in cd/klm C180-0 **Imax: 2695 cd/klm**

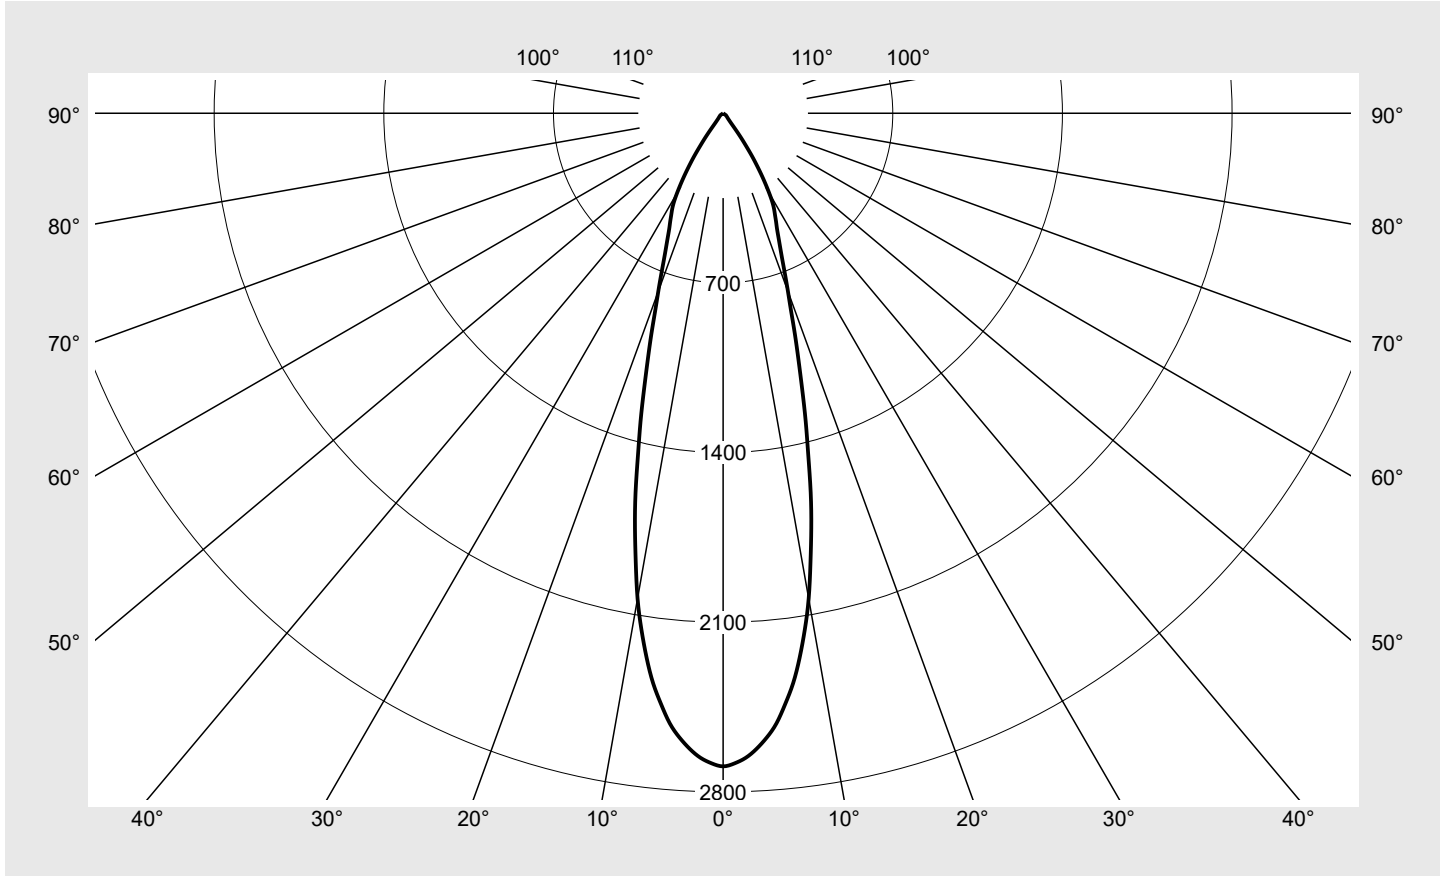

Classifications	
DIN 5040	A 8 0
CIE	N1=95 N2=98 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21	Order number: 51SE63MBA5B EAN: 4058352769911	LP number 59385_7
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	2694.7	0.6	0.6
1°	2682.9	5.1	5.8
2°	2661.3	10.2	16.0
3°	2626.5	15.1	31.0
4°	2582.0	19.8	50.8
5°	2526.7	24.1	74.9
6°	2451.1	28.1	103.0
7°	2369.6	31.7	134.7
8°	2268.5	34.6	169.3
9°	2155.9	37.0	206.3
10°	2033.1	38.7	245.0
11°	1889.1	39.5	284.5
12°	1749.6	39.9	324.4
13°	1606.3	39.6	364.1
14°	1451.7	38.5	402.6
15°	1316.6	37.4	439.9
16°	1182.9	35.8	475.7
17°	1063.4	34.1	509.8
18°	958.3	32.5	542.3
19°	860.0	30.7	573.0
20°	782.1	29.3	602.3
21°	713.2	28.0	630.3
22°	652.6	26.8	657.1
23°	603.4	25.9	683.0
24°	562.1	25.1	708.1
25°	526.2	24.4	732.5
26°	498.5	24.0	756.4
27°	471.8	23.5	779.9
28°	447.7	23.1	803.0
29°	418.5	22.2	825.2
30°	379.9	20.8	846.0
31°	337.7	19.1	865.1
32°	295.4	17.2	882.3
33°	252.5	15.1	897.4
34°	211.9	13.0	910.4
35°	167.9	10.6	920.9
36°	131.9	8.5	929.4
37°	96.9	6.4	935.8
38°	68.0	4.6	940.4
39°	50.9	3.5	943.9
40°	42.0	3.0	946.9
41°	36.2	2.6	949.5
42°	31.8	2.3	951.8
43°	28.9	2.2	954.0
44°	26.7	2.0	956.0
45°	24.8	1.9	957.9
46°	23.2	1.8	959.8

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	22.0	1.8	961.5
48°	20.4	1.7	963.2
49°	19.4	1.6	964.8
50°	17.8	1.5	966.3
51°	17.1	1.5	967.8
52°	16.0	1.4	969.1
53°	15.3	1.3	970.5
54°	14.6	1.3	971.8
55°	14.2	1.3	973.0
56°	13.3	1.2	974.2
57°	12.9	1.2	975.4
58°	12.3	1.1	976.6
59°	12.0	1.1	977.7
60°	11.7	1.1	978.8
61°	11.3	1.1	979.9
62°	11.2	1.1	981.0
63°	10.7	1.0	982.0
64°	10.6	1.0	983.1
65°	10.0	1.0	984.1
66°	9.9	1.0	985.0
67°	9.6	1.0	986.0
68°	9.2	0.9	986.9
69°	9.0	0.9	987.9
70°	8.7	0.9	988.8
71°	8.2	0.9	989.6
72°	7.9	0.8	990.4
73°	7.8	0.8	991.3
74°	7.5	0.8	992.0
75°	7.5	0.8	992.8
76°	6.8	0.7	993.6
77°	6.7	0.7	994.3
78°	6.6	0.7	995.0
79°	6.3	0.7	995.7
80°	5.8	0.6	996.3
81°	5.5	0.6	996.9
82°	5.1	0.6	997.4
83°	4.5	0.5	997.9
84°	4.1	0.4	998.4
85°	3.4	0.4	998.8
86°	3.0	0.3	999.1
87°	2.6	0.3	999.4
88°	2.2	0.2	999.6
89°	2.4	0.3	999.9
90°	2.4	0.3	1000.1

Photometric test report

Family Spot 21	Order number: 51SE63MBA5B EAN: 4058352769911	LP number 59385_7
-------------------	---	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.9	22.0	21.3	22.3	22.6	20.9	22.0	21.3	22.3	22.6
	3H	21.3	22.2	21.7	22.6	22.9	21.3	22.2	21.7	22.6	22.9
	4H	21.6	22.5	22.0	22.8	23.2	21.6	22.5	22.0	22.8	23.2
	6H	22.1	22.8	22.5	23.2	23.6	22.1	22.8	22.5	23.2	23.6
	8H	22.4	23.0	22.8	23.4	23.8	22.4	23.0	22.8	23.4	23.8
	12H	22.6	23.1	23.0	23.5	24.0	22.6	23.1	23.0	23.5	24.0
4H	2H	20.9	21.7	21.3	22.1	22.5	20.9	21.7	21.3	22.1	22.5
	3H	21.5	22.2	21.9	22.6	23.0	21.5	22.2	21.9	22.6	23.0
	4H	21.9	22.6	22.4	23.0	23.4	21.9	22.6	22.4	23.0	23.4
	6H	22.6	23.1	23.1	23.5	24.0	22.6	23.1	23.1	23.5	24.0
	8H	22.9	23.4	23.4	23.8	24.3	22.9	23.4	23.4	23.8	24.3
	12H	23.3	23.6	23.8	24.1	24.6	23.3	23.6	23.8	24.1	24.6
8H	4H	22.1	22.6	22.6	23.0	23.5	22.1	22.6	22.6	23.0	23.5
	6H	22.9	23.3	23.5	23.8	24.3	22.9	23.3	23.5	23.8	24.3
	8H	23.4	23.7	23.9	24.2	24.8	23.4	23.7	23.9	24.2	24.8
	12H	23.9	24.1	24.4	24.6	25.2	23.9	24.1	24.4	24.6	25.2
12H	4H	22.2	22.6	22.7	23.0	23.5	22.2	22.6	22.7	23.0	23.5
	6H	23.1	23.4	23.6	23.9	24.4	23.1	23.4	23.6	23.9	24.4
	8H	23.6	23.8	24.1	24.3	24.9	23.6	23.8	24.1	24.3	24.9


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	36450.9
50°	28738.1
55°	25684.6
60°	24195.2
65°	24517.1
70°	26286.9
75°	30115.2
80°	34570.6
85°	40461.8

Photometric test report

Family Spot 21	Order number: 51SE63MBA5B EAN: 4058352769911	LP number 59385_7
--------------------------	---	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

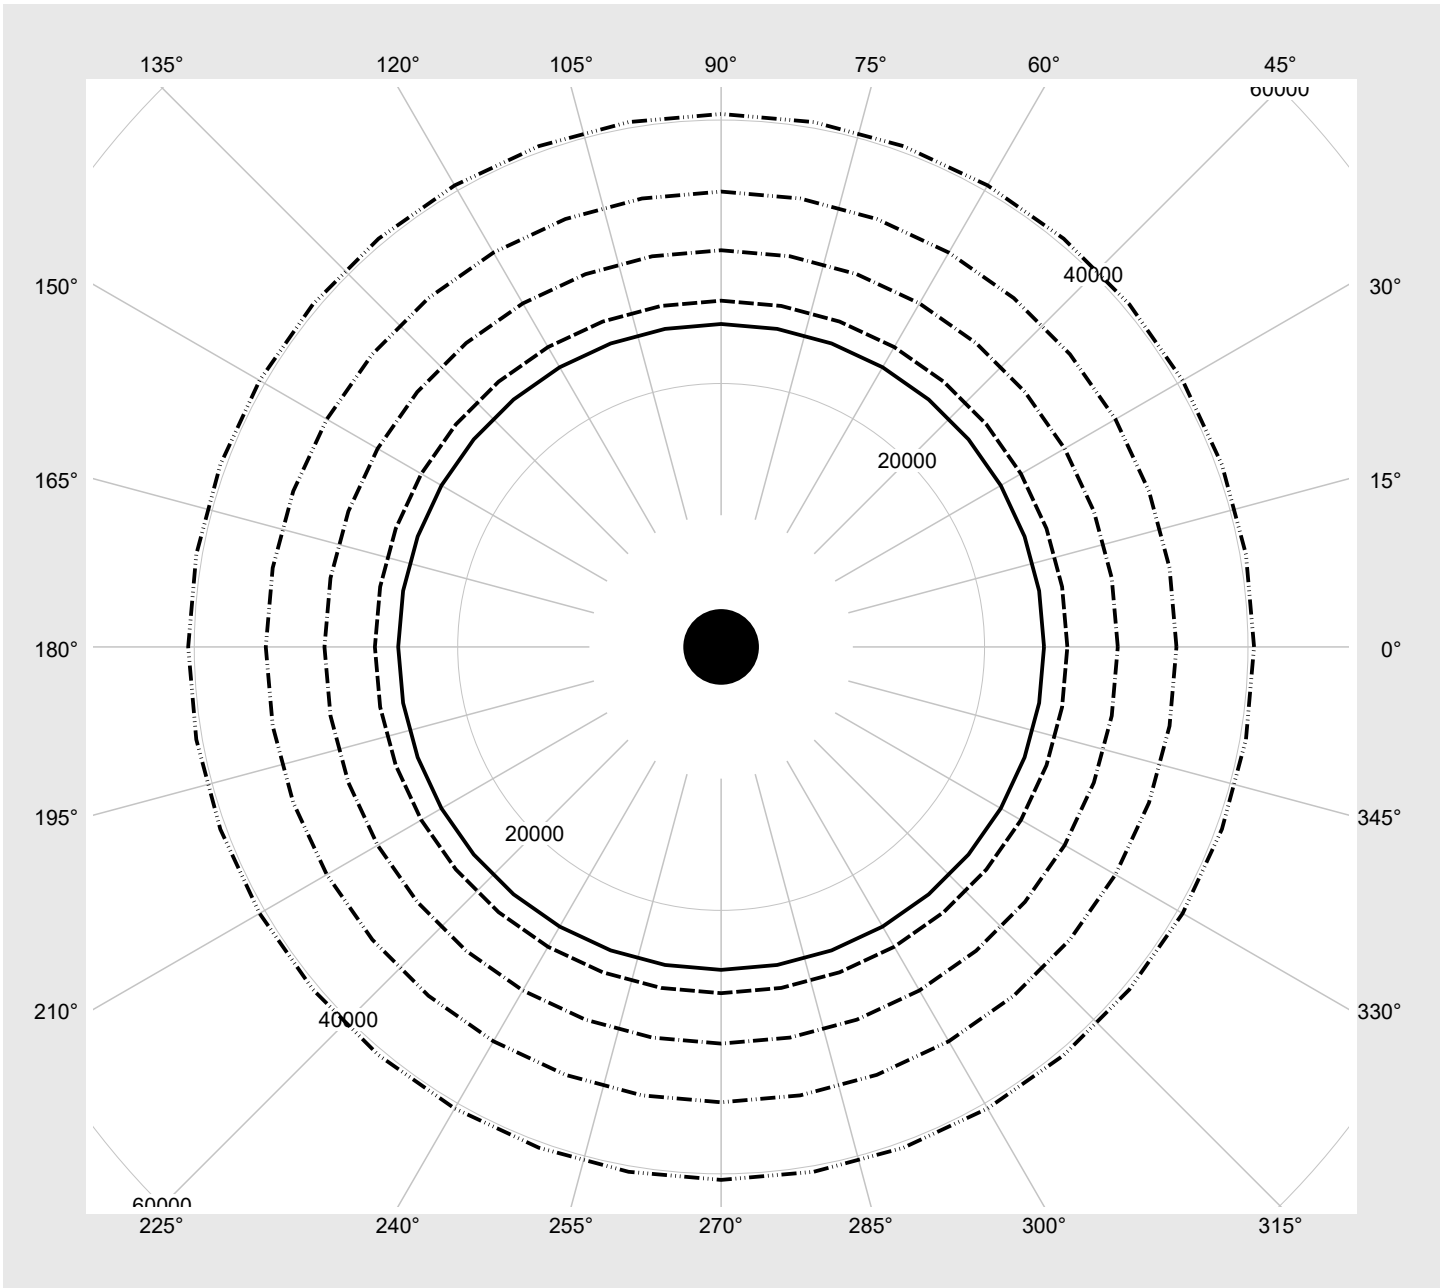

Photometric test report

Family Spot 21	Order number: 51SE63MBA5B EAN: 4058352769911	LP number 59385_7
--------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	5300	41.8
14	ON	ON	ON	OFF	5090	39.8
13	ON	ON	OFF	ON	4880	37.8
12	ON	ON	OFF	OFF	4660	35.8
11	ON	OFF	ON	ON	4420	33.6
10	ON	OFF	ON	OFF	4190	31.7
9	ON	OFF	OFF	ON	3960	29.6
8	ON	OFF	OFF	OFF	3710	27.6
7	OFF	ON	ON	ON	3520	25.9
6	OFF	ON	ON	OFF	3280	24.0
5	OFF	ON	OFF	ON	3030	22.0
4	OFF	ON	OFF	OFF	2750	20.1
3	OFF	OFF	ON	ON	2480	17.8
2	OFF	OFF	ON	OFF	2230	15.9
1	OFF	OFF	OFF	ON	1950	13.9
0	OFF	OFF	OFF	OFF	1670	12.0