




Photometric test report

Family Licross® Protected	Order number: 51TP12DN59XF EAN: 4058352375587	LP number 58524_33
	Version prismatic cover, frosted, wide distribution Lamps LED 5000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 9030 lm Power consumption = 56.2 W Luminous efficacy = 160.7 lm/W	serial documentation 12.12.2019
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 631 cd/klm**

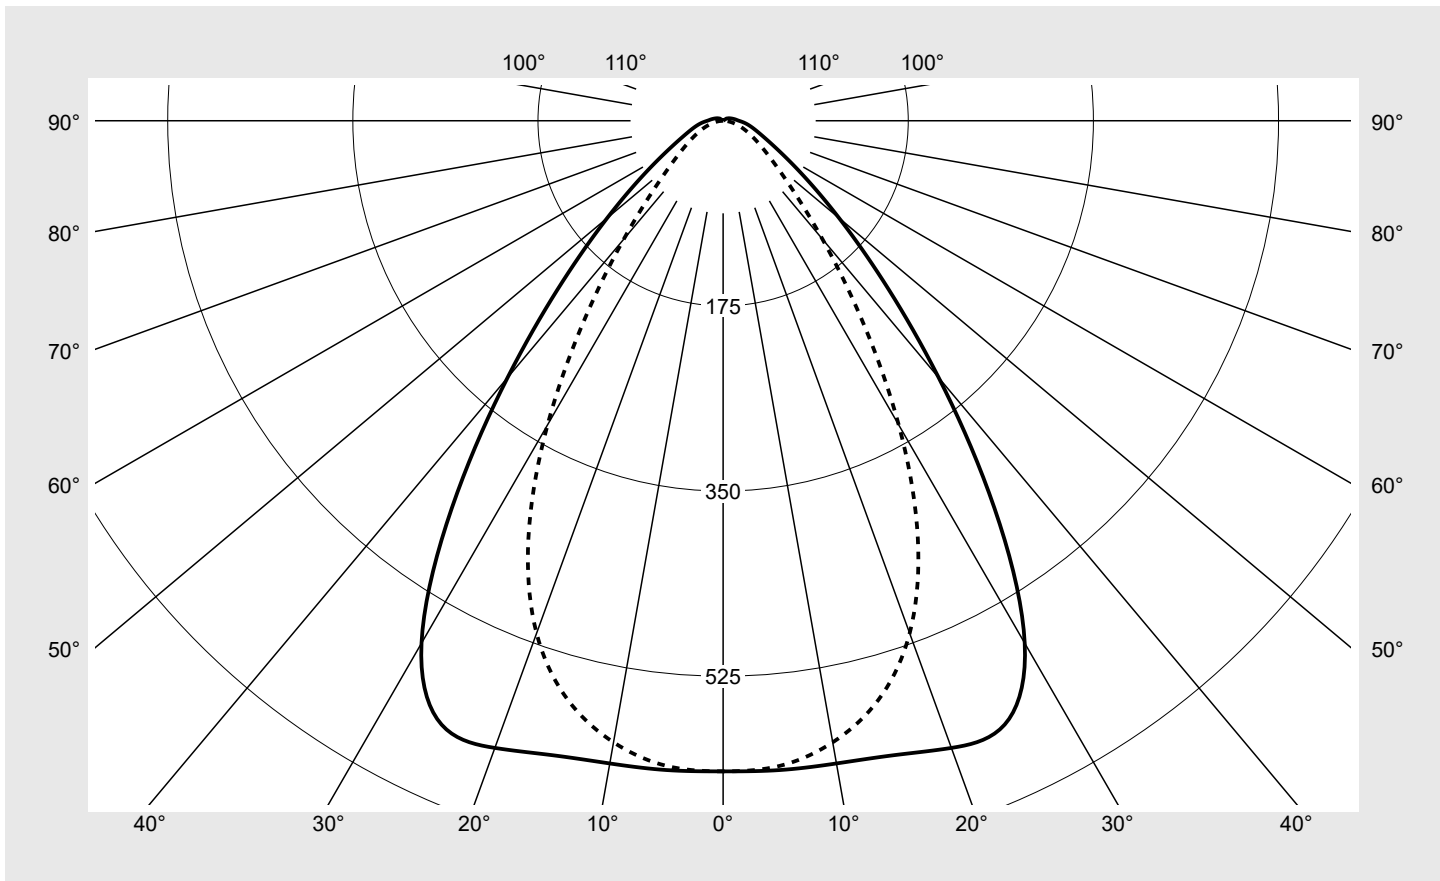

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Protected	Order number: 51TP12DN59XF EAN: 4058352375587	LP number 58524_33
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® Protected	Order number: 51TP12DN59XF EAN: 4058352375587	LP number 58524_33
-------------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.9	22.3	21.3	22.7	23.0	17.7	19.1	18.0	19.4	19.7
	3H	21.3	22.6	21.7	22.9	23.3	18.0	19.3	18.4	19.6	20.0
	4H	21.6	22.7	22.0	23.1	23.5	18.2	19.4	18.6	19.7	20.1
	6H	21.9	22.9	22.3	23.3	23.7	18.3	19.4	18.7	19.8	20.2
	8H	22.1	23.0	22.5	23.4	23.8	18.4	19.4	18.8	19.8	20.2
	12H	22.3	23.1	22.7	23.5	23.9	18.4	19.3	18.8	19.7	20.2
4H	2H	21.0	22.2	21.4	22.5	22.9	18.2	19.3	18.6	19.7	20.1
	3H	21.5	22.5	21.9	22.9	23.3	18.7	19.6	19.1	20.0	20.4
	4H	21.9	22.7	22.3	23.1	23.6	18.9	19.8	19.3	20.2	20.6
	6H	22.3	23.0	22.7	23.5	23.9	19.1	19.8	19.5	20.3	20.7
	8H	22.5	23.2	23.0	23.6	24.1	19.1	19.8	19.6	20.3	20.8
	12H	22.8	23.4	23.3	23.8	24.3	19.2	19.8	19.7	20.3	20.8
8H	4H	21.9	22.6	22.3	23.0	23.5	19.1	19.8	19.6	20.2	20.7
	6H	22.4	22.9	22.9	23.4	23.9	19.4	20.0	19.9	20.4	20.9
	8H	22.7	23.2	23.2	23.7	24.2	19.5	20.0	20.0	20.5	21.0
	12H	23.1	23.5	23.6	24.0	24.5	19.6	20.0	20.1	20.5	21.1
12H	4H	21.9	22.5	22.4	22.9	23.4	19.2	19.7	19.7	20.2	20.7
	6H	22.4	22.9	22.9	23.4	23.9	19.5	20.0	20.0	20.4	21.0
	8H	22.7	23.1	23.2	23.6	24.2	19.7	20.1	20.2	20.6	21.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		20285.1	21559.0	23596.6	21244.7	15079.9	11200.8	10402.6	
50°		14524.6	15520.4	17334.0	15455.2	10815.9	8191.6	7795.5	
55°		10636.6	11317.2	12648.9	11100.7	7897.9	6380.0	6315.2	
60°		8138.8	8513.6	9289.4	8234.6	6118.3	5246.0	5391.2	
65°		6687.1	6815.5	7060.5	6317.0	5020.5	4513.8	4756.6	
70°		5946.6	5873.1	5641.2	5084.0	4328.1	3994.0	4290.8	
75°		5684.9	5423.0	4823.7	4286.1	3821.5	3542.2	3852.5	
80°		5747.0	5349.5	4488.9	3808.4	3438.6	3177.3	3424.9	
85°		6076.1	5614.6	4553.2	3734.1	3285.2	2904.0	3092.8	


Photometric test report

Family Licross® Protected	Order number: 51TP12DN59XF EAN: 4058352375587	LP number 58524_33
--	--	-------------------------------------



Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

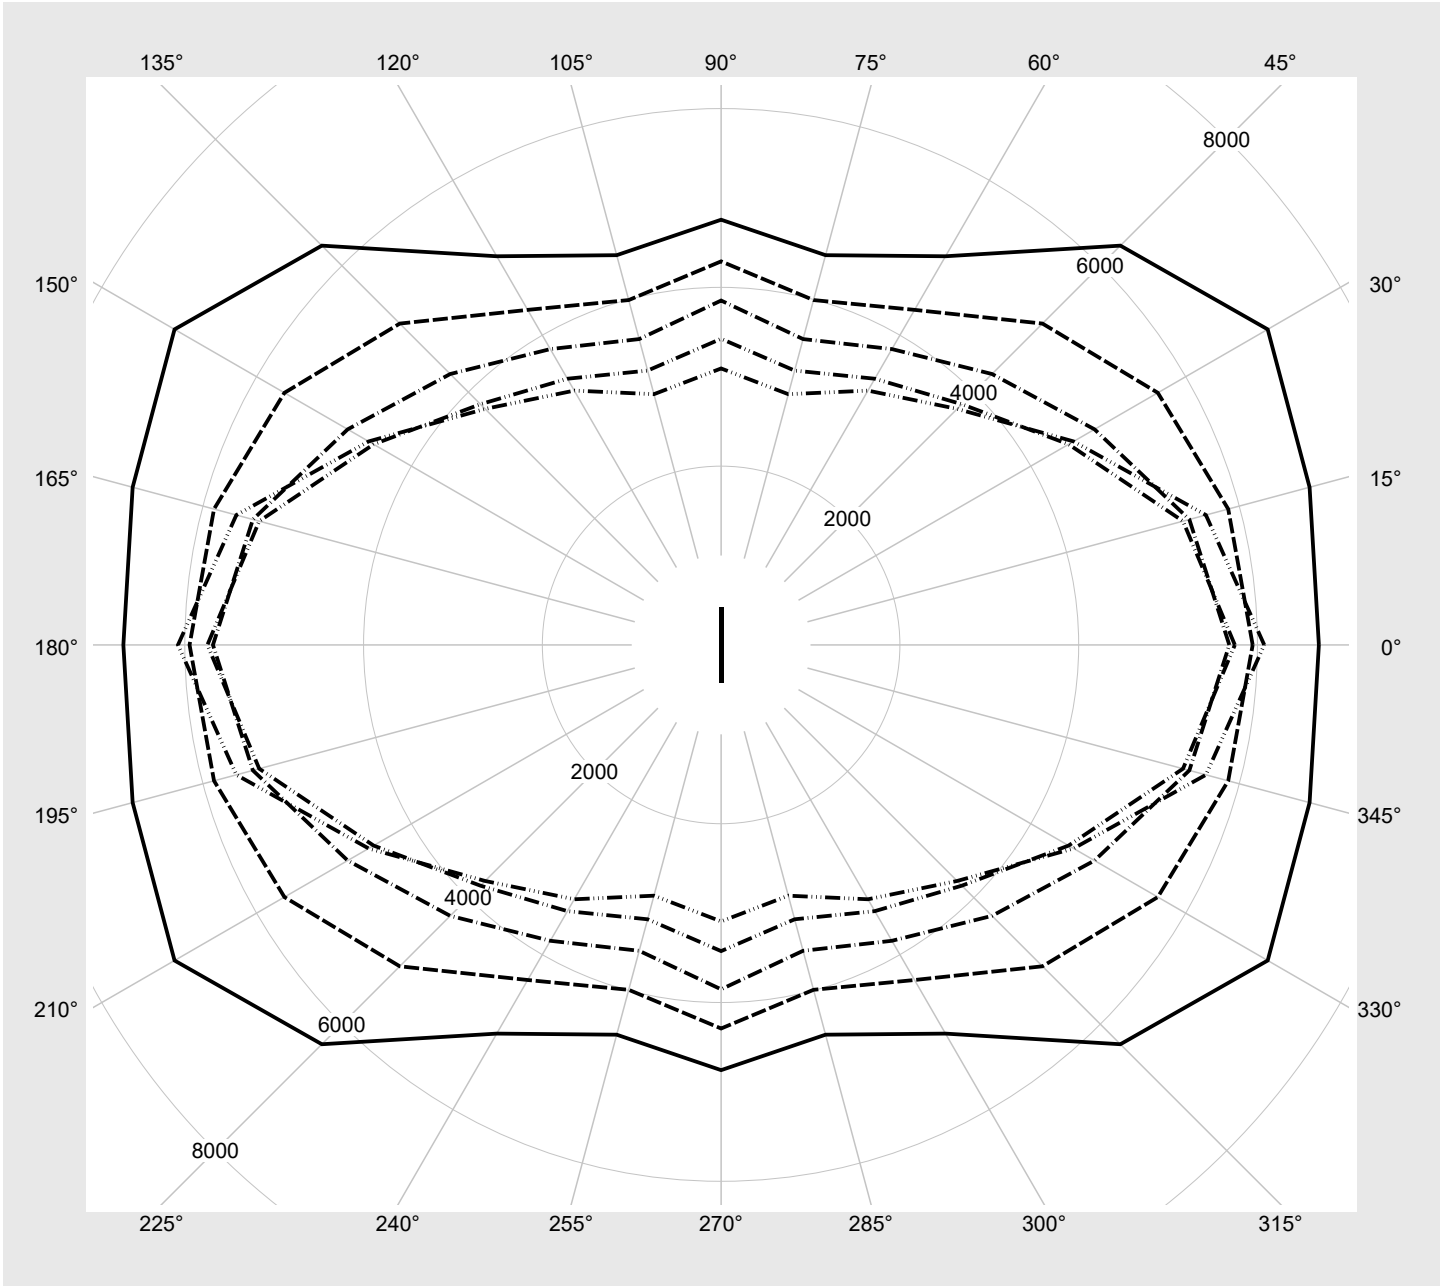

Photometric test report

Family Licross® Protected	Order number: 51TP12DN59XF EAN: 4058352375587	LP number 58524_33
-------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9030	56.2
95	240	252	8581	53.2
90	227	250	8130	50.2
85	213	248	7678	47.3
80	200	245	7226	44.3
75	187	243	6775	41.5
70	174	240	6323	38.6
65	161	238	5871	35.8
60	148	234	5420	33.0
55	135	231	4968	30.2
50	122	227	4517	27.5
45	109	224	4065	24.9
40	97	219	3613	22.2
35	84	214	3162	19.7
30	72	208	2710	17.0
25	60	201	2258	14.5
20	48	194	1807	12.0
15	36	183	1355	9.6
10	24	169	903	7.2
5	12	143	451	4.6