

Photometric test report

Family
Licross® 11 Protected

Order number: 51TS12DN48XF3S
EAN: 4058352506189

LP number
58522_65




Version prismatic cover, frosted, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting emergency light operation: 3 h
Rated values Net luminous flux = 810 lm
 Power consumption = 5.0 W
 Luminous efficacy = 162 lm/W

serial
documentation
04.05.2021

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 420 cd/klm

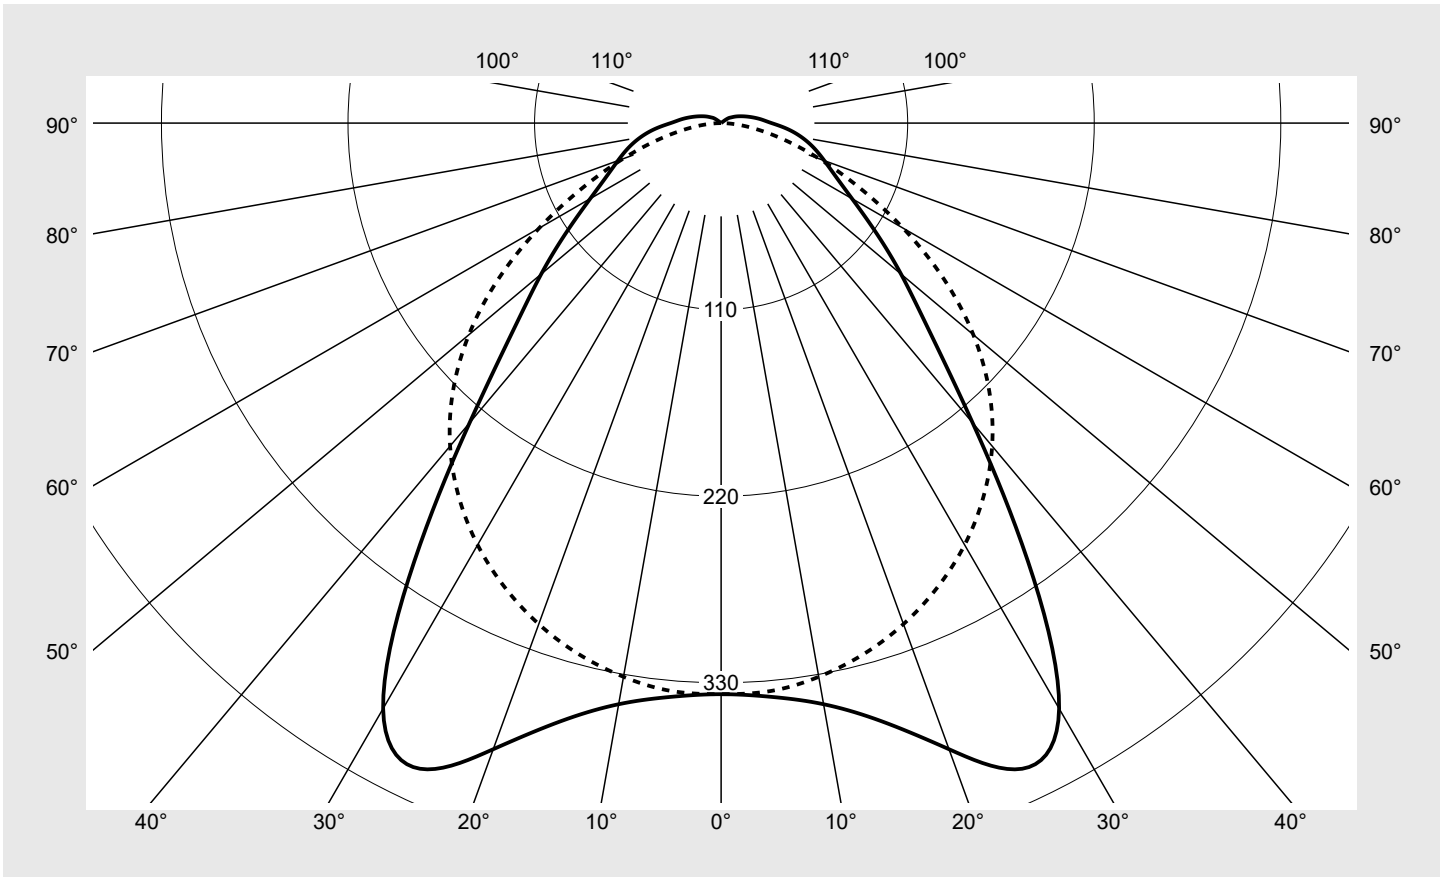

Classifications

DIN 5040 A 4 1
 CIE N1=54 N2=82 N3=95
 N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 96.8%
 ϕ_o 3.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12DN48XF3S EAN: 4058352506189	LP number 58522_65
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12DN48XF3S EAN: 4058352506189	LP number 58522_65
----------------------------------------	------------------------------------------------------------------	------------------------------

UGR-Table	Standard room	siteco								
-----------	---------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.4	14.1	12.8	14.4	14.7	14.3	16.0	14.7	16.3	16.6
	3H	13.6	15.1	14.0	15.4	15.8	15.3	16.8	15.7	17.1	17.5
	4H	14.3	15.7	14.7	16.0	16.4	15.7	17.1	16.1	17.4	17.8
	6H	15.1	16.3	15.5	16.7	17.1	15.9	17.2	16.3	17.6	18.0
	8H	15.5	16.7	15.9	17.1	17.5	16.1	17.2	16.5	17.6	18.0
	12H	15.9	17.0	16.3	17.4	17.8	16.1	17.2	16.5	17.6	18.0
4H	2H	13.3	14.7	13.7	15.0	15.4	14.8	16.1	15.2	16.5	16.9
	3H	14.6	15.8	15.1	16.2	16.6	16.0	17.2	16.5	17.6	18.0
	4H	15.4	16.5	15.9	16.9	17.3	16.5	17.6	17.0	18.0	18.4
	6H	16.3	17.3	16.8	17.7	18.2	16.9	17.8	17.3	18.3	18.7
	8H	16.8	17.7	17.3	18.1	18.6	17.0	17.9	17.5	18.3	18.8
	12H	17.3	18.1	17.8	18.5	19.0	17.1	17.9	17.6	18.3	18.8
8H	4H	15.9	16.7	16.3	17.2	17.6	16.8	17.7	17.3	18.1	18.6
	6H	16.9	17.7	17.4	18.1	18.6	17.3	18.1	17.8	18.5	19.0
	8H	17.5	18.2	18.0	18.6	19.2	17.5	18.2	18.0	18.7	19.2
	12H	18.2	18.7	18.7	19.2	19.7	17.7	18.2	18.2	18.7	19.3
12H	4H	15.9	16.7	16.4	17.1	17.6	16.9	17.6	17.4	18.1	18.6
	6H	17.1	17.7	17.6	18.2	18.7	17.5	18.1	18.0	18.6	19.1
	8H	17.7	18.3	18.2	18.8	19.3	17.7	18.3	18.2	18.8	19.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:		L = 1480	H(C0) = 13	H(C180) = 13
				B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		1478.8	1556.5	1782.7	2128.6	2365.5	2282.8	2219.0	
50°		1261.1	1323.1	1505.3	1802.5	2072.2	2124.7	2119.0	
55°		1092.5	1148.7	1320.9	1573.8	1799.7	1888.6	1961.8	
60°		970.6	1014.0	1163.1	1408.7	1575.9	1630.7	1739.3	
65°		912.8	942.0	1045.8	1264.9	1400.6	1395.6	1491.3	
70°		911.2	926.6	975.9	1137.8	1255.1	1192.6	1265.7	
75°		946.9	950.9	953.2	1040.4	1117.6	1013.0	1064.9	
80°		1002.9	997.7	975.9	982.7	998.3	870.5	883.4	
85°		1082.7	1076.8	1047.5	1008.9	945.3	774.3	734.4	

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12DN48XF3S EAN: 4058352506189	LP number 58522_65
----------------------------------------	------------------------------------------------------------------	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

