

Photometric test report

Family
Licross® Protected

Order number: 51TS12DN4DXLD
EAN: 4058352418635

LP number
58521_23



Version prismatic cover, frosted, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting DC mode (central or group accumulator) initial emergency light level
Rated values Net luminous flux = 2100 lm
 Power consumption = 14.7 W
 Luminous efficacy = 142.9 lm/W

serial
documentation
26.08.2020


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 419 cd/klm

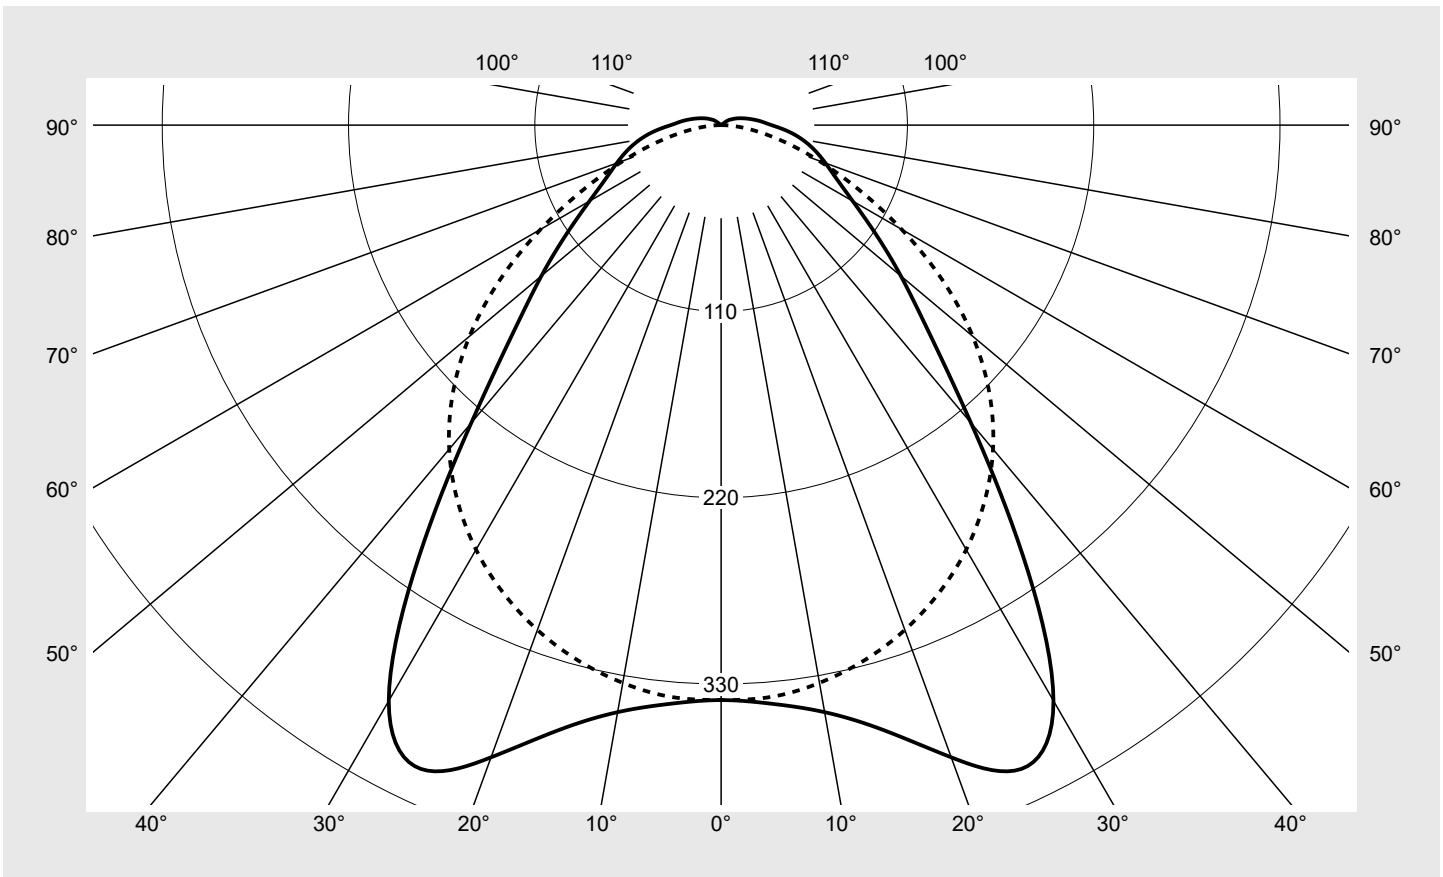

Classifications

DIN 5040 A 4 1
 CIE N1=54 N2=82 N3=95
 N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 96.8%
 ϕ_o 3.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Protected	Order number: 51TS12DN4DXLD EAN: 4058352418635	LP number 58521_23
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	339.5	339.5	339.5	339.5	339.5	339.5	339.5	2.0	2.0
5°	343.0	342.0	339.2	339.3	339.7	338.8	338.9	16.2	18.3
10°	352.0	350.9	345.1	341.6	338.4	335.1	334.4	32.6	50.9
15°	369.7	367.9	356.8	346.8	337.2	329.4	327.1	49.3	100.2
20°	397.2	393.9	374.9	354.6	335.9	321.8	317.2	66.8	167.0
25°	419.5	416.9	395.3	365.3	334.4	312.1	304.6	84.4	251.4
30°	392.5	397.1	392.3	370.7	332.1	300.1	289.4	97.4	348.9
35°	311.0	322.2	341.8	350.7	323.8	285.3	271.2	100.3	449.2
40°	229.5	240.6	267.7	298.9	299.5	266.8	249.8	94.7	543.9
45°	174.0	182.0	204.5	237.4	256.3	239.9	224.1	85.2	629.1
50°	138.5	144.4	161.2	187.1	207.0	203.8	193.9	74.9	704.0
55°	110.9	115.6	129.9	149.5	163.4	162.9	159.6	64.1	768.1
60°	89.8	92.9	103.5	120.2	127.5	124.1	123.1	53.4	821.5
65°	75.3	77.0	82.7	94.9	98.6	91.3	89.2	43.6	865.1
70°	65.6	65.8	66.8	73.1	74.5	64.6	61.3	35.1	900.1
75°	57.2	56.6	54.5	55.3	53.6	43.2	39.2	27.5	927.6
80°	48.6	47.5	44.1	40.6	36.2	26.8	21.9	20.7	948.4
85°	39.1	38.1	34.6	29.4	22.8	14.4	9.2	14.9	963.2
90°	29.7	28.9	25.8	20.2	13.1	5.9	0.8	10.0	973.2
95°	24.0	23.5	21.5	16.6	10.0	3.6	0.7	8.0	981.2
100°	19.1	18.8	17.3	13.3	7.4	1.9	0.7	6.2	987.3
105°	15.1	14.8	13.5	10.2	5.0	0.8	0.6	4.6	991.9
110°	11.8	11.4	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.1	8.6	7.4	4.7	1.4	0.7	0.7	2.3	997.5
120°	6.7	6.2	4.9	2.7	0.8	0.7	0.8	1.5	999.1
125°	4.5	4.0	2.9	1.3	0.8	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® Protected	Order number: 51TS12DN4DXLD EAN: 4058352418635	LP number 58521_23
-------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	---------------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.7	17.4	16.1	17.7	18.0	17.6	19.2	17.9	19.5	19.9
	3H	16.9	18.4	17.3	18.7	19.1	18.6	20.1	19.0	20.4	20.8
	4H	17.6	19.0	18.0	19.4	19.7	19.0	20.3	19.4	20.7	21.1
	6H	18.4	19.7	18.8	20.0	20.4	19.2	20.5	19.6	20.9	21.2
	8H	18.8	20.0	19.2	20.4	20.8	19.3	20.5	19.8	20.9	21.3
	12H	19.2	20.3	19.6	20.7	21.1	19.4	20.5	19.8	20.9	21.3
4H	2H	16.6	18.0	17.0	18.3	18.7	18.0	19.4	18.4	19.8	20.1
	3H	18.0	19.1	18.4	19.5	19.9	19.3	20.5	19.7	20.9	21.3
	4H	18.8	19.8	19.2	20.2	20.7	19.8	20.9	20.2	21.3	21.7
	6H	19.7	20.6	20.1	21.0	21.5	20.2	21.1	20.6	21.5	22.0
	8H	20.2	21.0	20.6	21.5	21.9	20.3	21.1	20.8	21.6	22.1
	12H	20.6	21.4	21.1	21.9	22.3	20.4	21.2	20.9	21.6	22.1
8H	4H	19.2	20.0	19.6	20.5	21.0	20.1	20.9	20.6	21.4	21.9
	6H	20.3	21.0	20.8	21.5	22.0	20.6	21.3	21.1	21.8	22.3
	8H	20.9	21.5	21.4	22.0	22.5	20.8	21.5	21.3	21.9	22.5
	12H	21.5	22.0	22.0	22.5	23.1	21.0	21.5	21.5	22.0	22.6
12H	4H	19.3	20.0	19.7	20.5	21.0	20.2	20.9	20.6	21.4	21.9
	6H	20.4	21.0	20.9	21.5	22.0	20.7	21.4	21.2	21.8	22.4
	8H	21.1	21.6	21.6	22.1	22.6	21.0	21.5	21.5	22.0	22.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		3836.8	4032.0	4598.3	5463.7	6087.0	5916.1	5764.5	
50°		3271.1	3429.2	3893.3	4641.8	5329.3	5486.0	5487.5	
55°		2840.1	2980.6	3416.0	4057.8	4630.4	4867.5	5060.6	
60°		2534.4	2642.8	3012.9	3630.7	4054.0	4202.7	4477.4	
65°		2388.9	2462.3	2717.7	3259.6	3600.9	3596.2	3838.4	
70°		2391.4	2426.2	2543.9	2937.9	3224.2	3073.7	3262.9	
75°		2478.4	2486.4	2488.5	2698.0	2875.6	2615.2	2756.7	
80°		2614.8	2601.0	2541.1	2551.0	2578.3	2254.2	2298.6	
85°		2809.3	2796.8	2722.7	2615.6	2440.8	2012.9	1924.8	

Photometric test report

Family
Licross® Protected

Order number: 51TS12DN4DXLD
EAN: 4058352418635

LP number
58521_23

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

