

Photometric test report

Family
Silica®

Order number: 5MX11DD1W4A
EAN: 4058352305287

LP number
59138_2



Version recessed luminaire, frosted cover, direct distribution, UGR≤25

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 3140 lm
Power consumption = 22.6 W
Luminous efficacy = 138.9 lm/W

serial
documentation
15.03.2021


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 355 cd/klm

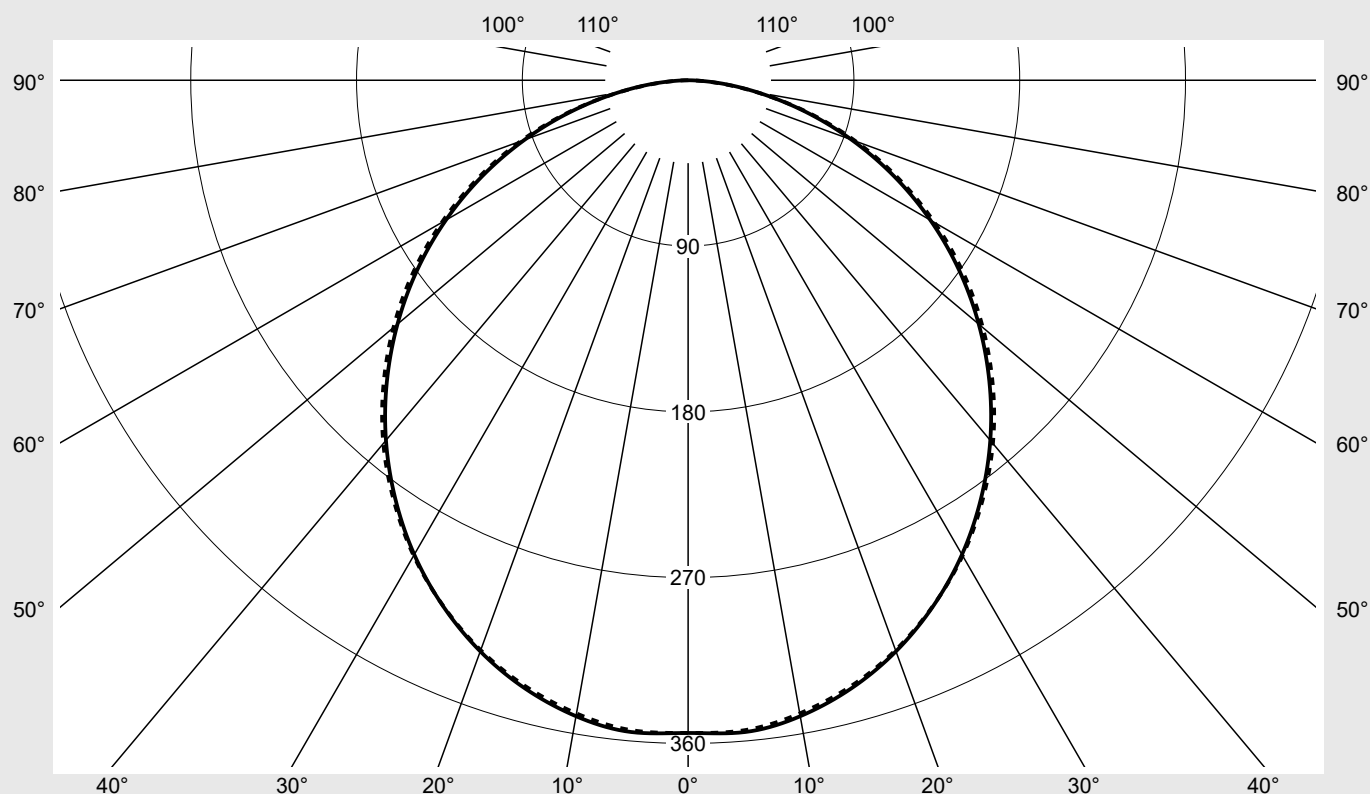

Classifications

DIN 5040 A 4 0
CIE N1=47 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica®	Order number: 5MX11DD1W4A EAN: 4058352305287	LP number 59138_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	354.3	354.3	354.3	354.3	354.3	354.3	354.3	2.1	2.1
5°	355.2	354.0	351.1	352.5	353.9	353.5	354.1	16.9	19.0
10°	350.5	349.4	346.7	348.0	349.4	348.8	349.0	33.2	52.2
15°	341.8	341.0	338.4	339.7	341.1	340.7	340.7	48.3	100.5
20°	329.9	329.5	326.9	328.3	329.6	329.5	329.2	61.7	162.1
25°	314.9	314.7	312.4	313.7	315.1	315.1	314.7	72.8	234.9
30°	297.3	297.3	295.2	296.3	297.7	298.1	298.0	81.4	316.3
35°	277.2	277.4	275.8	276.4	278.0	278.6	278.6	87.2	403.5
40°	255.2	255.4	254.6	254.7	256.0	257.1	257.4	90.1	493.6
45°	231.3	231.4	231.1	231.2	232.4	233.1	233.9	89.9	583.5
50°	206.0	205.9	206.3	206.2	207.1	207.7	208.8	86.8	670.4
55°	179.5	179.5	180.3	180.3	180.9	181.3	182.4	81.1	751.4
60°	151.9	152.0	153.0	153.1	153.5	153.9	154.4	72.7	824.1
65°	123.4	123.8	124.5	124.7	125.6	125.8	125.9	62.0	886.1
70°	94.5	95.2	95.0	95.8	96.4	96.8	96.8	49.3	935.5
75°	65.8	66.2	65.9	66.5	66.9	67.3	67.1	35.2	970.7
80°	38.9	38.8	38.8	38.5	38.6	38.6	38.5	20.9	991.6
85°	16.1	15.8	15.8	15.6	15.2	14.9	14.8	8.4	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica®	Order number: 5MX11DD1W4A EAN: 4058352305287	LP number 59138_2
--------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.8	22.5	21.1	22.8	23.1	20.8	22.5	21.2	22.8	23.1
	3H	22.4	23.9	22.8	24.3	24.6	22.5	24.0	22.9	24.3	24.7
	4H	23.0	24.5	23.4	24.8	25.2	23.1	24.6	23.5	24.9	25.3
	6H	23.5	24.8	23.9	25.2	25.6	23.6	24.9	24.0	25.3	25.7
	8H	23.7	24.9	24.1	25.3	25.7	23.8	25.0	24.2	25.4	25.8
	12H	23.8	25.0	24.2	25.4	25.8	23.9	25.0	24.3	25.4	25.8
4H	2H	21.5	23.0	21.9	23.3	23.7	21.6	23.0	22.0	23.4	23.8
	3H	23.3	24.6	23.8	25.0	25.4	23.4	24.6	23.8	25.0	25.4
	4H	24.1	25.2	24.5	25.6	26.0	24.2	25.3	24.6	25.7	26.1
	6H	24.7	25.6	25.1	26.1	26.5	24.8	25.7	25.2	26.2	26.6
	8H	24.9	25.8	25.4	26.2	26.7	25.0	25.8	25.4	26.3	26.7
	12H	25.0	25.8	25.5	26.3	26.8	25.1	25.9	25.6	26.3	26.8
8H	4H	24.4	25.3	24.9	25.8	26.2	24.5	25.4	25.0	25.8	26.3
	6H	25.2	25.9	25.6	26.3	26.8	25.2	25.9	25.7	26.4	26.9
	8H	25.4	26.1	25.9	26.5	27.1	25.5	26.1	26.0	26.6	27.1
	12H	25.6	26.2	26.1	26.7	27.2	25.6	26.2	26.1	26.7	27.2
12H	4H	24.5	25.3	25.0	25.7	26.2	24.6	25.4	25.1	25.8	26.3
	6H	25.2	25.9	25.7	26.3	26.9	25.3	25.9	25.8	26.4	26.9
	8H	25.5	26.1	26.0	26.6	27.1	25.6	26.1	26.1	26.6	27.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1430 B = 61
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		11773.5	11777.8	11765.3	11767.8	11828.6	11865.1	11907.2
50°		11534.0	11532.5	11551.2	11547.8	11600.3	11633.3	11694.4
55°		11266.4	11263.7	11313.0	11315.6	11353.1	11376.7	11444.1
60°		10932.3	10944.6	11015.2	11020.8	11049.6	11077.9	11119.0
65°		10513.5	10545.4	10607.9	10621.7	10698.7	10714.7	10722.7
70°		9940.7	10016.1	10000.0	10081.7	10141.8	10189.3	10183.1
75°		9157.6	9208.7	9164.9	9241.9	9310.8	9360.6	9335.7
80°		8055.2	8046.5	8048.1	7988.0	7993.4	7993.4	7984.5
85°		6650.8	6538.1	6524.0	6443.1	6263.4	6154.0	6101.1

Photometric test report

Family Silica®	Order number: 5MX11DD1W4A EAN: 4058352305287	LP number 59138_2
--------------------------	---	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

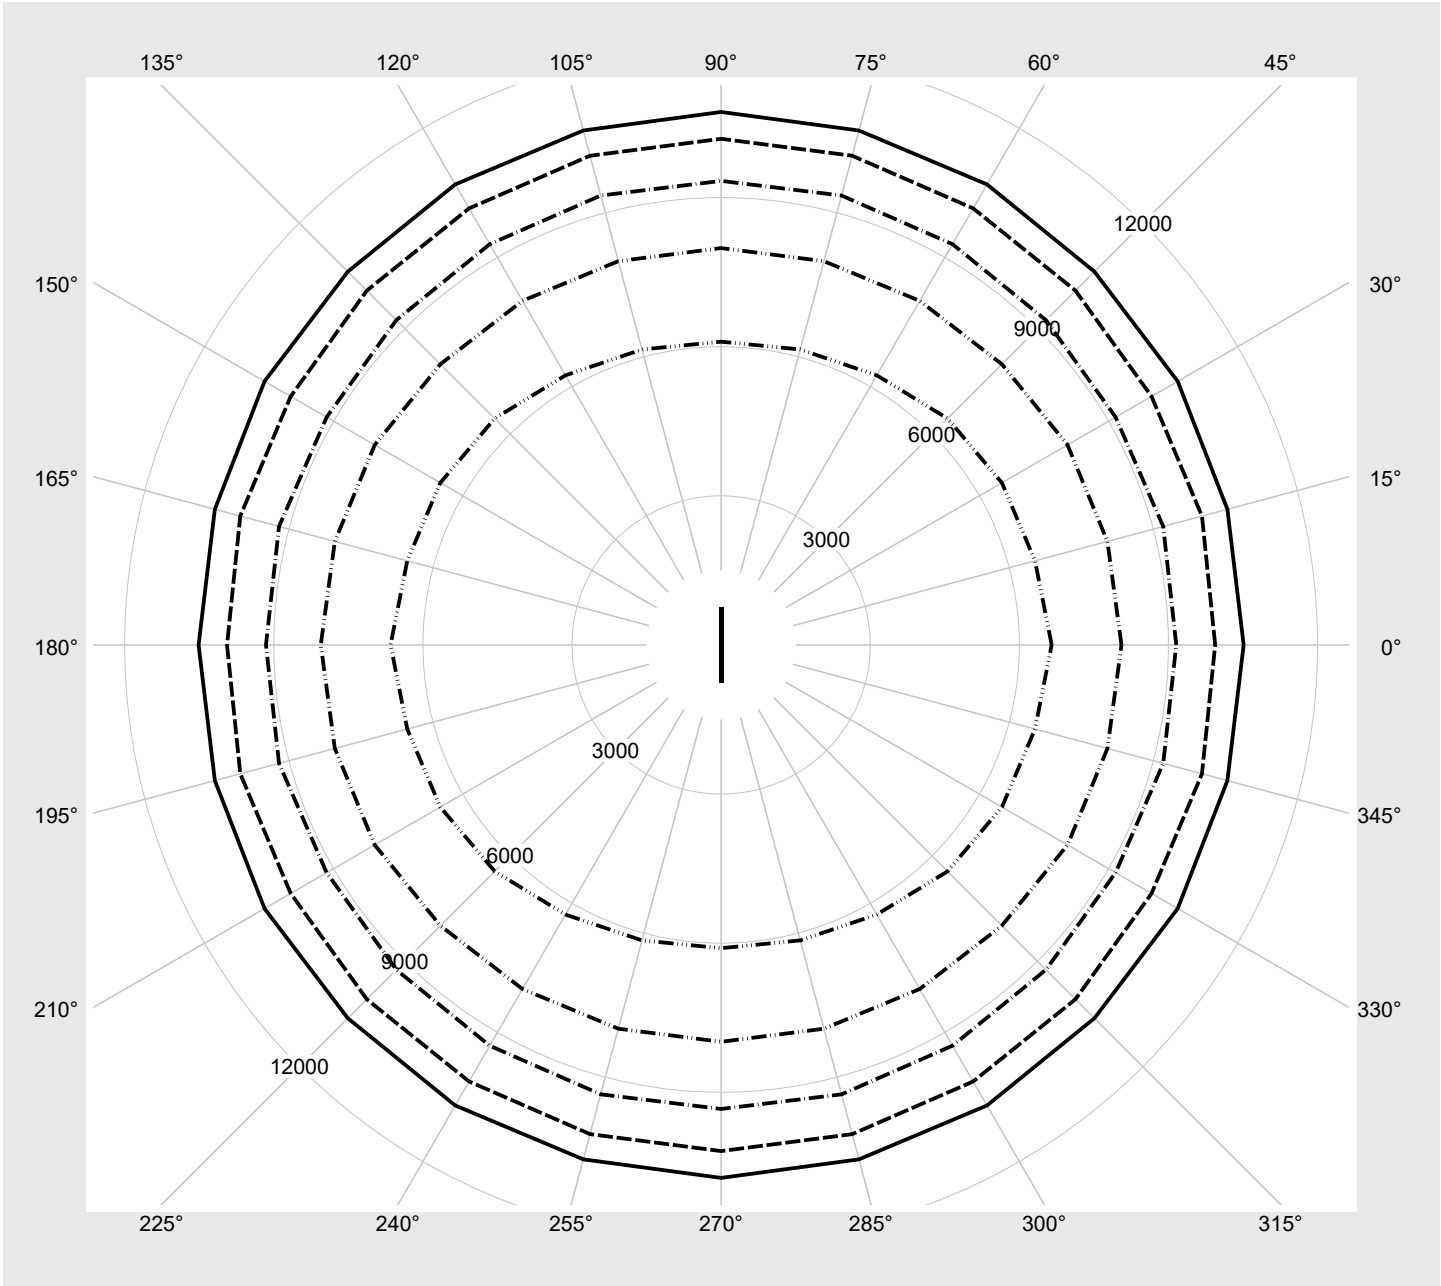

Photometric test report

Family Silica®	Order number: 5MX11DD1W4A EAN: 4058352305287	LP number 59138_2
--------------------------	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	3140	22.6
95	241	252	2983	21.5
90	228	250	2826	20.4
85	215	248	2668	19.4
80	202	246	2509	18.3
75	189	243	2349	17.2
70	177	241	2201	16.2
65	164	238	2040	15.1
60	151	235	1879	14.0
55	139	232	1729	13.1
50	126	228	1566	12.0
45	114	225	1415	11.0
40	101	220	1251	9.9
35	89	216	1099	8.9
30	77	210	946	8.0
25	64	204	780	6.9
20	52	196	626	6.0
15	40	186	472	5.1
10	28	173	317	4.1
5	16	153	161	3.3
3	10	136	83	2.7