

Photometric test report

Family
DL® 30 LED

Order number: 5XA513281B08A5
EAN: 4058352058688

LP number
57202_7



Version post-top mounting
Optic asymmetric, wide distribution for intersection areas (ST1.2c)
Cover PMMA cover, impact resistant, IK08
Lamps LED 3000 K | CRI ≥ 80
Controlgear ECG Plus
Rated values Net luminous flux = 4590 lm
Power consumption = 49.0 W
Luminous efficacy = 93.7 lm/W

serial
documentation
18.11.2020

siteco

Luminous intensity in cd/klm


C180-0

C235-55

C240-60

C270-90

Imax: 554 cd/klm

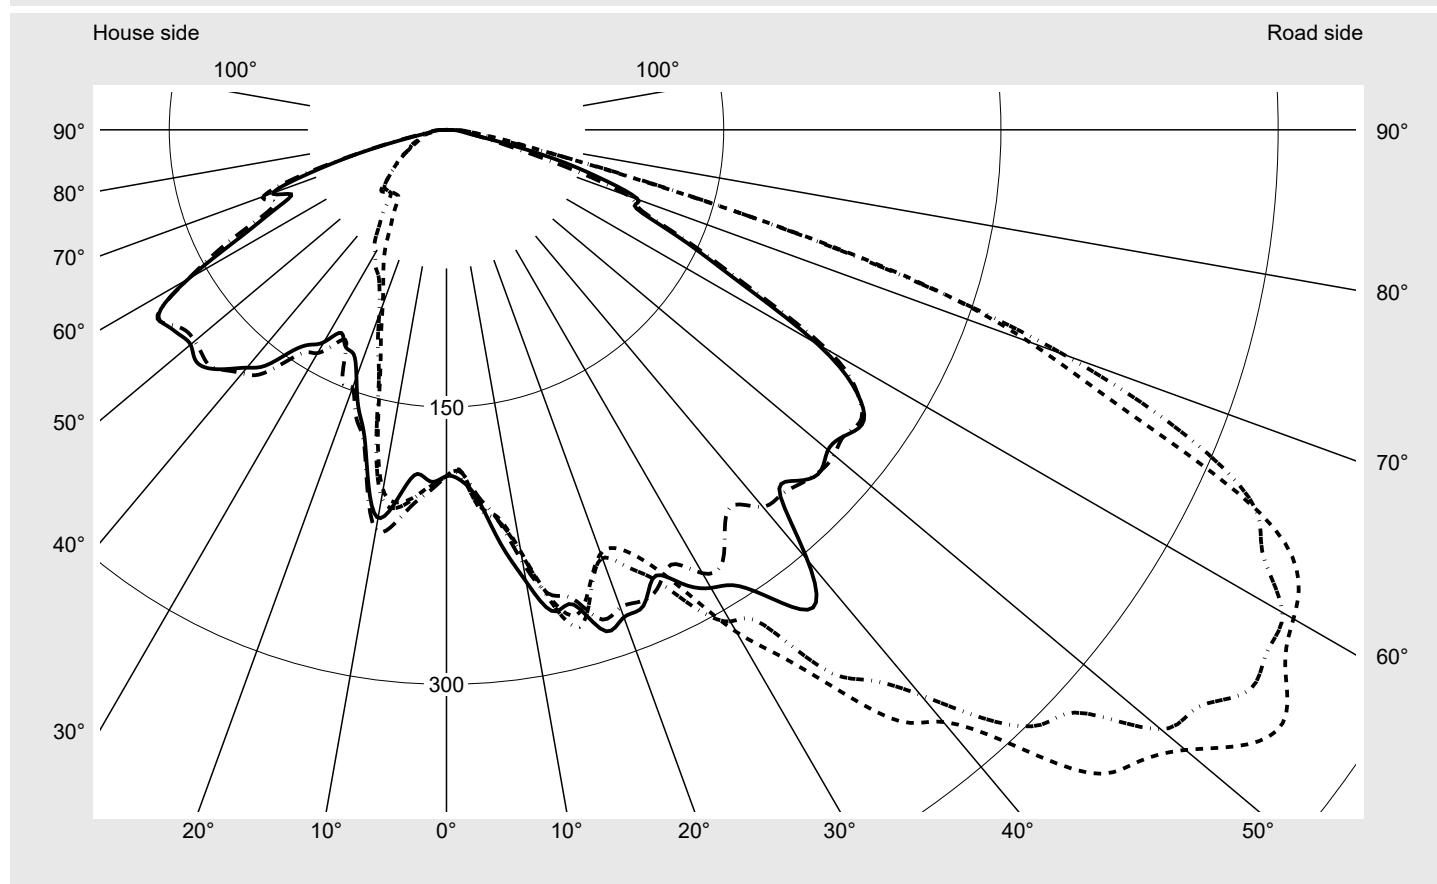

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	355.6
Imax 80°	35.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
-----------------------------	--	-----------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52.5°** **KMK 50°** **KMK 47.5°** **siteco**

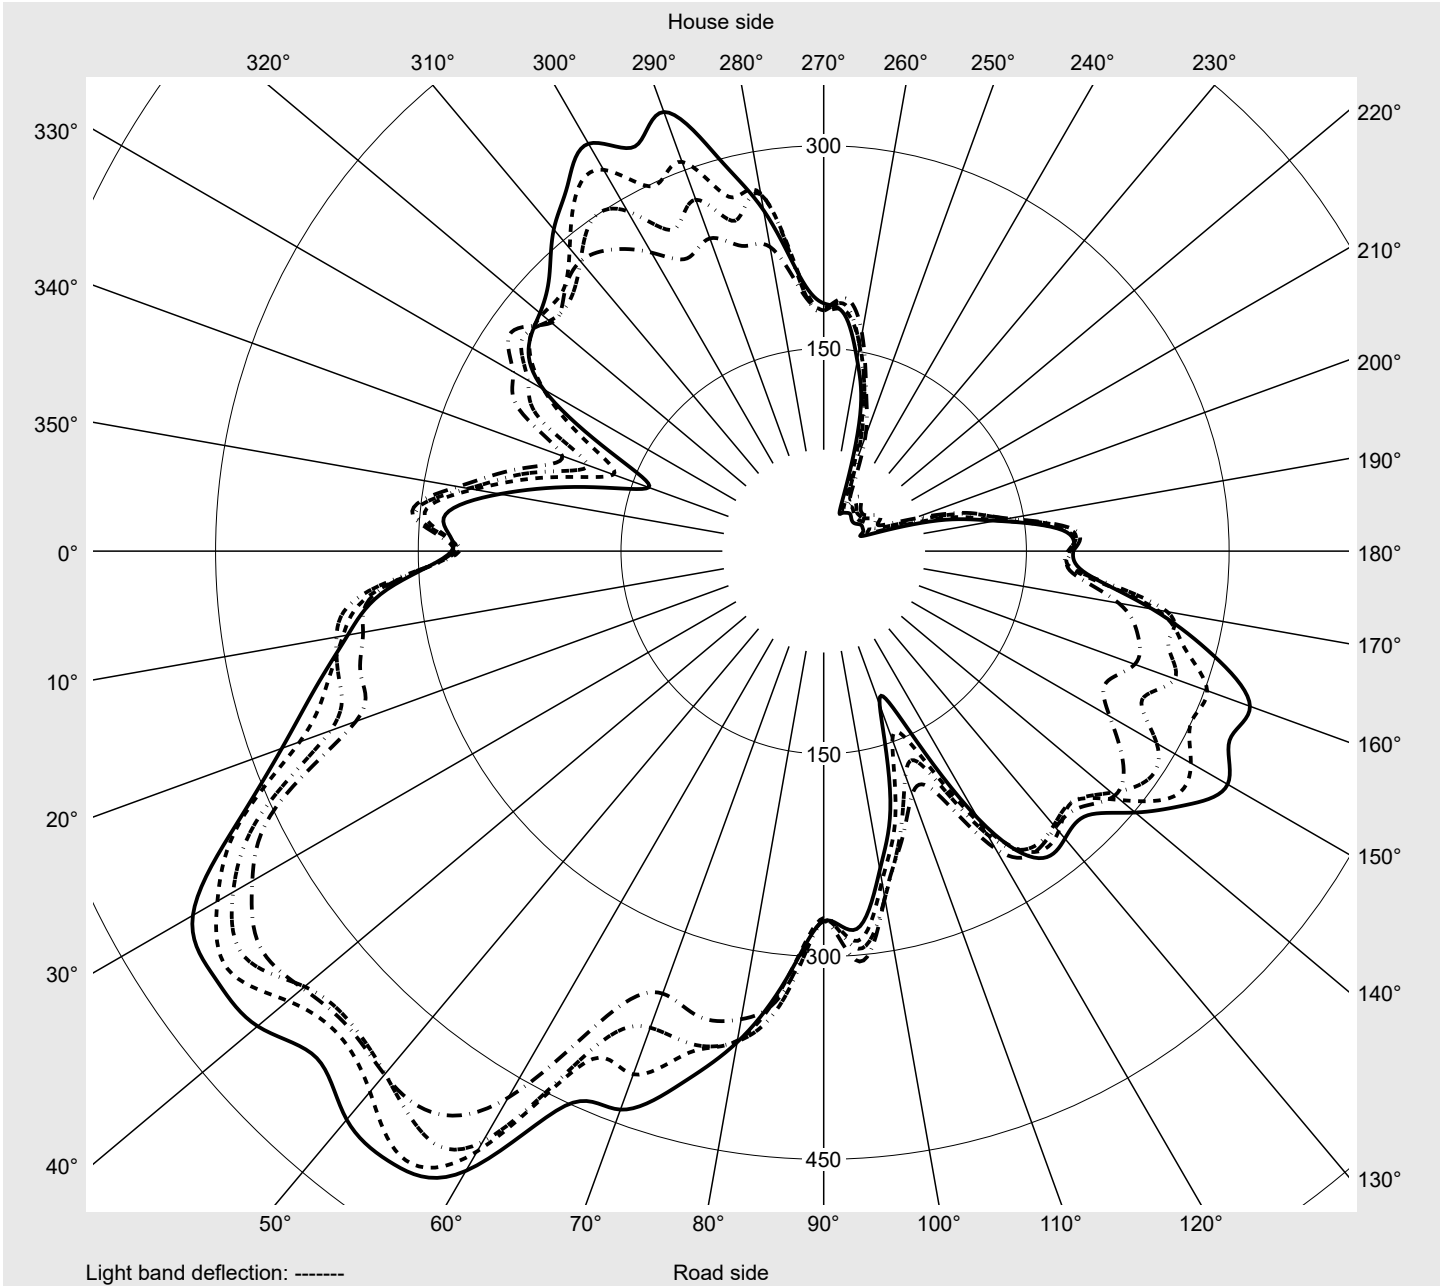

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
-----------------------------	--	-----------------------------



Table of values for luminous intensities **Maximum luminous intensity**

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4
2,5°	190.3	190.9	191.9	191.2	189.9	187.6	188.0	188.9	188.0	186.0	184.0	185.0	187.3	188.3
5,0°	201.7	204.0	206.3	204.7	202.7	203.4	203.4	206.0	203.4	201.4	200.7	204.0	205.6	204.7
7,5°	226.3	226.3	225.3	225.0	219.7	215.8	215.1	217.4	215.8	213.8	209.9	211.2	213.2	213.5
10,0°	248.2	251.2	249.9	250.5	247.6	242.6	240.4	241.0	235.8	231.8	229.9	231.8	232.8	235.4
12,5°	266.9	265.9	268.2	273.8	274.7	270.8	270.2	266.2	259.7	253.1	255.1	259.3	261.6	265.9
15,0°	265.9	272.1	273.8	275.1	276.4	281.9	277.4	276.1	268.2	262.0	265.6	271.8	278.3	280.0
17,5°	284.2	283.9	279.7	281.6	273.4	263.3	259.0	259.3	260.0	263.3	260.3	258.0	260.7	266.6
20,0°	280.6	288.2	285.2	279.7	271.1	259.3	250.2	246.3	249.5	249.2	247.6	244.0	246.6	257.1
22,5°	278.7	292.8	286.5	280.3	272.4	264.9	259.0	252.1	241.0	236.1	235.8	245.6	256.1	265.2
25,0°	266.6	272.8	277.7	282.3	280.6	275.4	274.7	267.2	250.5	237.4	245.3	259.0	269.2	272.4
27,5°	277.0	284.6	286.5	286.9	288.2	295.0	297.3	287.5	275.7	274.4	275.7	282.9	291.8	286.2
30,0°	286.2	301.3	303.2	309.8	308.5	308.8	305.5	310.1	311.4	310.4	309.8	313.7	307.2	299.6
32,5°	292.4	304.9	307.2	308.1	325.2	334.7	325.2	334.7	346.5	335.3	349.7	338.3	316.3	304.5
35,0°	310.8	316.7	309.8	318.3	333.4	349.7	361.8	379.5	367.1	368.7	371.0	370.4	356.3	328.4
37,5°	325.8	317.6	305.2	320.9	346.5	370.4	386.7	401.8	405.7	397.2	395.2	403.4	375.3	325.5
40,0°	303.9	297.7	292.1	308.8	346.5	399.5	415.5	423.7	433.2	438.1	445.3	418.2	399.2	353.3
42,5°	266.9	300.0	299.6	308.1	346.5	424.7	444.7	460.4	459.1	486.6	461.4	449.9	432.6	365.1
45,0°	268.5	310.1	324.8	326.5	340.2	422.8	469.3	489.9	499.1	489.6	491.5	492.2	455.2	375.9
47,5°	274.1	329.8	346.1	354.6	368.4	446.7	488.2	509.5	503.3	497.7	505.6	506.6	467.0	379.5
50,0°	269.5	337.9	366.1	371.0	388.4	459.1	504.6	523.3	501.3	494.5	504.9	522.0	504.6	407.4
52,5°	271.8	331.4	361.2	380.5	412.6	477.4	518.0	538.7	517.7	506.9	522.3	546.2	512.8	417.5
55,0°	275.4	324.2	357.6	389.0	426.7	480.1	539.0	550.1	546.9	530.5	549.2	554.1	529.5	452.9
57,5°	262.6	328.4	355.6	399.2	450.6	513.5	530.5	547.8	545.9	513.1	540.6	538.0	526.2	486.6
60,0°	231.8	300.9	350.7	385.7	437.2	492.5	516.7	533.8	523.0	486.0	522.0	529.2	522.3	490.5
62,5°	179.1	252.8	318.9	353.3	401.1	468.3	500.4	520.0	482.7	470.6	509.5	519.0	498.1	463.7
65,0°	141.5	191.9	249.2	282.6	348.1	448.3	486.3	475.5	455.8	457.8	468.9	481.0	482.4	454.2
67,5°	111.3	167.3	215.1	240.7	314.4	417.5	425.4	414.2	406.4	393.9	413.9	399.2	434.2	403.8
70,0°	110.4	168.0	212.5	225.3	278.0	331.7	353.0	336.3	307.8	283.6	293.4	335.6	355.6	331.4
72,5°	88.1	129.7	164.1	188.9	223.3	253.5	266.9	238.4	207.0	204.7	220.4	252.8	247.2	230.5
75,0°	59.9	76.6	83.8	91.4	118.5	131.3	147.4	128.7	114.6	112.3	117.6	125.4	129.3	111.0
77,5°	26.9	29.8	33.7	35.4	34.7	43.6	55.3	67.8	60.6	51.4	55.3	56.3	55.0	40.3
80,0°	12.8	13.8	15.4	16.7	18.0	20.3	24.6	35.4	32.7	29.8	31.4	33.1	27.5	24.9
82,5°	9.2	10.2	11.1	12.1	13.4	14.7	16.0	18.3	17.7	19.0	17.7	18.3	18.3	18.0
85,0°	6.9	7.2	7.5	8.5	9.2	10.5	11.5	13.4	10.8	10.8	12.1	12.1	12.4	12.1
87,5°	4.6	4.9	5.2	5.6	6.2	6.9	7.5	7.5	7.5	7.9	8.2	8.2	8.2	7.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4
2,5°	186.7	186.0	186.0	186.0	185.7	186.0	187.0	187.3	185.7	186.0	187.3	186.0	185.3	185.7
5,0°	203.0	203.4	201.1	199.4	199.4	199.1	201.4	201.7	199.4	198.1	197.5	195.5	193.5	193.5
7,5°	213.8	213.8	213.8	213.5	212.9	211.2	212.2	212.2	208.3	207.0	207.9	203.0	197.5	193.9
10,0°	237.1	236.8	240.7	239.0	237.7	234.1	233.5	230.5	223.3	222.0	219.7	213.5	207.3	200.4
12,5°	265.6	262.0	259.3	259.7	257.4	255.4	248.2	243.3	236.4	228.6	221.0	218.1	210.9	204.0
15,0°	274.4	272.1	271.8	270.8	262.3	256.1	251.5	242.3	230.9	220.1	213.8	208.9	205.0	201.1
17,5°	270.5	270.5	274.4	276.7	277.7	273.8	263.3	250.2	230.9	217.8	205.3	195.2	190.3	185.3
20,0°	264.6	270.5	279.0	279.0	275.1	273.1	263.9	244.9	226.3	206.0	195.5	188.9	180.8	169.0
22,5°	272.8	280.3	287.8	284.6	276.1	263.6	253.5	239.0	222.3	203.7	190.3	179.4	164.7	155.2
25,0°	277.0	284.2	285.2	281.3	272.1	256.7	243.6	239.7	229.2	211.2	195.5	177.5	153.6	146.7
27,5°	283.3	277.7	275.1	266.6	264.9	256.4	241.7	234.5	231.8	220.7	201.4	177.8	159.8	159.1
30,0°	288.5	284.6	283.9	282.6	277.0	270.2	254.1	236.4	233.8	230.5	212.2	193.5	178.1	181.4
32,5°	300.9	285.2	281.6	279.0	277.7	262.0	247.6	234.8	228.9	225.3	213.8	202.7	198.8	185.7
35,0°	296.0	274.7	272.8	272.4	262.6	261.6	235.4	222.0	227.9	225.6	221.4	221.0	212.2	194.8
37,5°	297.0	296.0	298.0	294.4	255.7	275.4	244.9	223.3	217.8	221.7	226.9	235.4	214.8	216.8
40,0°	326.2	307.2	303.6	300.0	266.2	280.3	255.4	228.6	217.1	216.1	232.2	239.4	236.4	230.5
42,5°	325.8	308.1	309.5	304.2	267.9	289.5	255.1	226.9	211.5	210.2	237.7	256.4	254.1	252.5
45,0°	331.1	322.9	328.1	312.4	270.8	298.6	267.2	229.6	206.0	200.1	250.5	269.5	265.9	261.0
47,5°	348.4	356.6	351.7	325.2	273.8	304.9	260.3	222.3	191.6	197.5	254.4	272.1	266.9	268.2
50,0°	375.3	377.6	368.4	331.4	273.8	295.4	260.7	218.1	176.8	177.2	242.0	267.9	264.9	261.3
52,5°	411.9	384.1	367.7	318.9	271.5	289.5	248.2	204.7	148.7	163.4	234.5	271.8	270.5	261.6
55,0°	439.8	408.0	369.0	318.0	273.8	280.6	239.4	190.6	121.2	140.2	228.6	277.4	277.7	276.4
57,5°	458.4	410.0	364.5	311.1	263.3	267.5	210.2	149.7	103.2	143.4	218.7	267.5	268.2	272.1
60,0°	455.8	392.6	356.0	305.2	238.1	218.7	169.6	116.2	90.4	121.2	188.6	237.1	237.1	259.7
62,5°	417.8	361.5	307.5	251.5	185.3	159.8	118.9	80.2	71.4	109.4	164.7	215.1	220.7	258.7
65,0°	370.4	300.0	270.8	198.1	146.0	113.3	83.2	61.2	58.3	79.9	139.5	192.9	208.3	246.3
67,5°	313.1	249.2	225.6	167.3	114.3	81.9	51.4	54.0	55.3	75.3	105.8	153.3	188.3	220.7
70,0°	289.5	238.1	201.1	153.9	105.4	75.6	46.2	41.6	47.8	58.6	91.0	116.6	134.6	175.8
72,5°	194.5	142.8	130.0	109.4	71.4	49.8	36.7	29.8	26.5	40.3	73.0	108.1	107.7	114.3
75,0°	101.2	76.0	77.0	58.3	38.0	29.8	25.2	21.6	20.3	23.3	44.2	71.4	73.7	72.0
77,5°	36.0	36.7	33.1	27.5	22.6	17.7	17.0	16.4	15.1	14.4	25.5	30.8	36.0	36.7
80,0°	23.6	21.6	19.0	16.7	14.4	12.4	11.5	11.1	11.5	11.1	11.8	12.8	17.7	18.0
82,5°	17.4	15.7	13.8	12.4	10.8	9.5	8.5	8.5	8.2	8.5	8.8	9.5	10.2	10.8
85,0°	11.5	10.5	9.5	8.5	7.5	6.9	6.5	6.2	6.2	6.2	6.5	6.9	7.2	7.9
87,5°	7.2	6.9	6.2	5.6	5.2	4.9	4.9	4.9	4.9	4.9	5.2	5.2	5.6	5.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
------------------------------------	--	------------------------------------



Table of values for luminous intensities **Maximum luminous intensity**

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4
2,5°	186.0	187.6	188.0	187.6	186.7	187.3	189.9	190.9	190.6	191.2	191.9	192.2	190.9	188.0
5,0°	194.2	195.5	193.9	191.6	193.2	190.3	189.6	188.0	187.0	187.3	189.9	192.5	192.5	190.6
7,5°	194.2	195.8	199.1	201.1	200.7	200.7	201.7	203.0	201.1	198.1	198.4	200.4	199.4	196.8
10,0°	200.4	200.4	201.7	203.0	205.0	208.9	210.9	213.2	213.2	210.9	208.9	207.6	203.4	198.8
12,5°	206.0	212.2	212.9	213.8	213.2	207.3	205.3	199.8	195.5	192.5	193.2	190.3	187.0	178.1
15,0°	201.4	205.3	211.2	206.3	199.4	192.5	186.3	178.5	171.6	166.7	165.4	160.8	152.9	139.2
17,5°	185.7	182.7	182.7	179.4	167.3	163.7	161.8	155.2	158.2	154.2	149.3	143.4	131.0	124.1
20,0°	162.7	158.8	159.5	158.8	155.9	154.9	155.9	149.3	142.4	140.2	131.0	127.4	117.6	108.1
22,5°	154.2	152.9	155.5	156.5	153.9	151.0	150.6	143.4	131.3	118.5	112.0	109.0	104.8	93.3
25,0°	150.6	159.1	157.5	147.4	142.8	142.8	143.1	136.6	129.3	114.0	101.8	99.5	99.5	89.7
27,5°	169.0	162.7	150.6	147.4	148.0	144.1	139.5	127.7	123.8	114.0	100.5	93.3	92.7	86.8
30,0°	174.2	161.4	159.1	155.5	152.3	146.0	146.4	138.5	132.6	124.4	109.7	97.6	90.4	84.2
32,5°	177.5	177.2	165.0	155.9	158.8	156.9	153.3	144.1	137.9	126.1	112.6	101.5	90.7	79.9
35,0°	198.4	187.6	175.8	173.2	166.7	156.9	154.9	147.0	146.4	138.5	116.6	103.8	95.0	77.9
37,5°	204.7	200.4	192.9	174.5	176.5	175.8	176.2	167.7	160.8	151.6	125.1	105.8	95.0	69.1
40,0°	225.6	214.8	198.1	199.8	201.4	185.3	176.5	169.0	168.0	156.5	132.3	111.7	96.3	63.2
42,5°	235.1	229.9	228.6	211.2	204.7	190.3	180.8	172.6	175.5	167.0	131.0	113.0	89.1	53.7
45,0°	263.3	257.1	230.2	212.5	218.4	209.6	198.4	178.8	182.4	182.7	140.2	113.6	84.5	51.1
47,5°	281.3	270.2	244.3	230.5	244.9	240.7	221.7	184.7	184.4	185.3	138.8	109.4	69.1	45.2
50,0°	278.0	293.7	284.6	260.0	276.4	263.9	258.0	192.9	180.8	183.1	137.9	107.1	58.6	40.6
52,5°	286.5	316.3	313.7	300.0	301.9	276.4	250.5	190.3	182.1	179.1	131.0	95.9	43.2	36.7
55,0°	300.9	327.5	345.1	331.4	335.6	298.6	246.9	195.8	184.7	177.5	129.3	87.8	36.3	31.4
57,5°	313.1	330.1	361.2	371.7	370.7	321.6	255.1	204.3	184.4	165.4	110.7	60.9	30.1	27.8
60,0°	310.4	340.2	362.5	392.0	386.7	328.4	276.4	204.0	161.1	136.2	92.7	47.2	28.8	24.9
62,5°	318.0	341.9	346.8	388.0	372.0	317.0	250.2	174.5	125.7	98.2	68.8	35.4	26.5	22.3
65,0°	295.7	327.1	372.3	396.2	325.8	267.9	224.0	150.3	103.2	73.7	50.1	31.8	24.9	21.0
67,5°	280.0	306.8	362.8	386.7	266.6	217.4	198.8	135.2	91.0	61.2	38.6	31.8	24.2	20.3
70,0°	227.9	262.6	320.3	333.7	248.5	213.8	198.8	150.0	99.9	65.5	42.9	34.4	23.9	19.0
72,5°	154.9	201.7	268.8	263.9	221.7	187.3	175.5	142.1	77.3	45.2	35.7	31.8	20.6	17.7
75,0°	82.5	92.3	138.5	147.4	134.6	116.6	113.6	84.5	48.8	30.8	26.5	20.6	19.3	17.4
77,5°	48.5	47.2	55.0	50.4	49.8	49.4	43.6	35.7	23.9	18.7	16.0	13.8	13.4	12.8
80,0°	27.8	29.1	28.2	19.3	18.0	17.4	15.7	13.4	11.8	10.5	10.8	9.8	8.8	8.8
82,5°	13.1	14.7	16.0	14.4	13.4	12.4	10.8	9.8	8.5	7.5	7.2	7.2	7.2	6.9
85,0°	8.5	9.2	9.8	9.8	9.5	8.8	7.9	7.2	6.2	5.9	5.6	5.2	5.2	5.2
87,5°	6.2	6.9	7.2	7.2	6.5	6.2	5.6	4.9	4.3	4.3	3.9	3.9	4.3	4.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
-----------------------------	--	-----------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4
2,5°	187.6	188.6	190.6	191.2	191.6	192.5	192.9	193.5	193.9	195.2	195.8	195.8	195.2	195.5
5,0°	190.9	191.2	193.5	196.8	197.5	199.4	200.1	200.1	199.1	199.1	199.4	201.1	203.0	205.3
7,5°	193.5	190.6	188.0	190.9	195.5	203.4	206.3	206.0	206.0	210.9	214.2	215.8	214.8	217.1
10,0°	190.9	189.9	187.0	185.7	190.9	197.8	202.0	203.4	204.7	212.5	216.1	217.4	219.7	225.3
12,5°	173.2	172.2	167.7	166.4	170.6	171.6	175.5	179.8	183.4	186.0	191.2	197.1	198.1	201.7
15,0°	134.6	138.2	141.8	141.1	142.8	138.8	141.5	151.0	163.7	174.5	177.8	176.5	173.6	179.8
17,5°	112.6	112.0	115.3	115.6	120.2	117.9	123.5	127.1	142.8	158.5	165.4	165.0	162.7	160.8
20,0°	101.8	97.3	99.5	97.3	102.8	100.9	106.4	109.7	123.8	132.3	137.5	145.1	148.7	160.1
22,5°	89.7	84.2	78.6	78.3	84.5	89.4	94.6	104.5	110.7	112.6	119.9	131.3	147.0	151.0
25,0°	79.9	69.1	60.6	61.6	66.1	80.6	87.1	95.0	99.2	102.2	111.3	122.8	128.0	134.3
27,5°	72.4	58.6	48.1	48.1	58.3	71.4	83.2	91.0	94.6	102.5	117.2	125.7	130.7	141.5
30,0°	67.5	52.7	44.9	44.5	49.8	60.6	77.0	85.5	94.3	107.4	122.8	131.6	139.5	150.0
32,5°	58.9	45.2	43.9	44.5	43.2	53.0	72.4	84.2	97.6	109.4	125.1	136.9	142.8	147.4
35,0°	54.0	42.6	43.2	44.2	43.2	45.5	63.5	82.2	98.9	109.7	134.6	151.0	154.2	161.8
37,5°	46.2	43.6	42.9	42.6	42.6	44.2	56.3	81.9	101.8	116.2	147.0	158.8	167.0	175.5
40,0°	45.5	45.5	43.9	40.6	44.5	44.5	47.5	73.7	101.5	118.9	146.0	167.3	171.9	173.6
42,5°	46.5	46.5	44.2	41.3	44.5	45.8	45.5	68.8	103.2	119.5	155.9	178.5	176.5	179.4
45,0°	48.8	47.2	44.2	42.2	43.9	47.5	45.8	56.0	95.9	118.5	160.8	188.3	180.8	183.7
47,5°	48.5	46.5	41.3	40.0	42.6	47.8	45.5	48.5	90.1	121.5	163.4	187.6	179.4	193.9
50,0°	44.2	42.2	38.0	37.3	38.0	41.9	41.9	39.0	72.0	116.6	153.6	183.1	177.8	200.1
52,5°	38.3	37.3	35.0	34.4	35.0	37.7	37.7	34.7	61.9	114.3	154.2	178.8	178.1	204.0
55,0°	33.4	33.7	31.4	30.5	31.8	33.7	32.7	30.8	41.6	104.1	143.1	175.8	183.4	204.3
57,5°	29.8	29.8	27.2	27.5	28.5	30.8	29.5	27.8	32.4	88.4	127.1	164.1	185.0	223.0
60,0°	26.2	26.5	23.9	23.6	24.2	27.2	26.2	24.9	30.1	61.9	97.3	129.7	161.4	215.5
62,5°	22.6	21.9	20.6	20.3	20.6	22.6	22.6	23.3	31.4	47.5	76.6	98.2	135.9	197.8
65,0°	21.0	19.6	18.3	18.0	18.3	19.6	21.3	21.9	27.2	35.7	57.3	74.3	109.0	164.7
67,5°	18.7	16.7	16.4	15.7	16.4	17.4	19.6	21.0	25.5	35.7	48.5	70.7	101.2	160.1
70,0°	16.4	15.4	14.7	14.4	14.7	15.4	16.7	18.7	26.5	40.0	43.6	65.8	105.4	158.2
72,5°	14.7	14.1	13.4	13.1	13.4	14.4	15.4	18.3	25.2	35.7	36.0	52.1	83.5	121.8
75,0°	14.1	13.4	12.4	12.1	12.4	13.4	15.1	18.0	19.3	25.2	24.9	29.8	50.1	72.0
77,5°	12.1	11.1	10.5	10.5	10.5	11.5	11.8	13.4	13.8	15.4	16.7	20.6	27.2	32.4
80,0°	8.5	8.2	8.2	8.5	8.5	8.5	8.8	9.2	10.5	11.1	11.8	12.4	14.1	16.0
82,5°	6.5	6.5	6.5	6.5	6.5	6.9	7.2	7.5	7.9	8.2	8.2	9.2	10.5	11.8
85,0°	5.2	5.2	5.2	5.2	5.2	5.6	5.6	5.6	5.9	5.9	6.2	6.5	7.5	8.2
87,5°	4.3	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6	4.6	4.6	4.9	5.2	5.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
------------------------------------	--	------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4	187.4
2,5°	195.5	192.5	189.9	191.6	189.9	187.3	186.0	188.3	188.9	188.0	187.6	187.3	188.9	191.6
5,0°	206.0	202.7	198.8	202.0	203.0	201.4	198.1	199.1	200.7	199.8	198.8	200.7	203.0	205.3
7,5°	219.1	215.8	209.6	210.6	206.3	204.3	200.4	201.4	207.9	214.5	216.5	217.8	219.4	221.4
10,0°	225.6	224.6	218.7	217.1	213.2	211.9	209.6	209.9	219.1	224.6	230.2	233.2	238.1	244.6
12,5°	205.6	217.1	217.8	217.1	216.8	215.1	209.9	215.1	221.7	222.3	224.6	231.8	242.0	247.2
15,0°	186.0	193.9	191.9	197.1	202.7	207.0	201.7	201.4	208.3	209.6	212.9	222.3	235.4	243.6
17,5°	170.0	169.3	167.7	172.9	174.9	172.9	178.1	183.1	190.3	195.5	205.6	219.4	233.8	255.7
20,0°	158.2	162.4	162.7	166.7	160.8	160.8	162.4	168.6	177.8	184.0	196.1	210.6	230.5	247.2
22,5°	152.6	155.5	154.2	160.5	160.8	158.8	157.8	154.2	165.0	183.7	199.8	219.4	238.4	247.2
25,0°	141.8	147.4	151.3	153.9	156.5	161.1	165.0	160.5	159.8	182.4	205.0	223.3	236.4	243.3
27,5°	143.1	149.0	152.6	158.2	163.4	163.4	169.0	173.9	175.2	194.5	217.8	234.5	245.6	250.5
30,0°	151.9	157.2	159.1	159.5	163.1	176.5	180.1	183.1	194.5	203.4	223.0	245.3	252.5	258.4
32,5°	150.6	159.5	166.7	170.3	172.6	183.4	196.1	190.6	209.2	224.0	229.9	252.8	261.0	265.6
35,0°	161.4	163.1	170.0	177.2	190.6	199.8	200.1	214.2	210.9	238.1	244.3	263.0	269.8	268.8
37,5°	177.2	185.7	190.3	186.3	196.5	210.2	218.1	226.9	234.8	242.3	256.1	267.2	267.2	262.0
40,0°	172.9	184.7	204.7	212.5	213.5	214.8	236.8	246.3	248.5	258.0	253.8	272.1	258.4	237.7
42,5°	182.4	194.5	209.6	213.8	234.5	239.7	242.6	270.2	261.3	271.5	261.0	272.8	237.1	233.2
45,0°	197.8	210.2	221.7	222.0	229.2	252.5	272.4	265.6	276.4	278.3	275.7	260.7	222.0	233.2
47,5°	228.6	233.8	246.3	239.0	255.1	272.4	280.0	271.1	263.0	282.3	265.6	248.9	206.0	234.5
50,0°	267.9	253.1	276.7	262.6	290.5	299.0	280.0	264.6	264.9	272.4	252.8	231.8	186.0	224.0
52,5°	268.8	271.5	306.5	298.0	325.8	320.3	292.4	272.8	272.1	265.9	239.4	195.5	165.7	210.9
55,0°	256.1	301.3	345.8	330.4	348.1	330.4	310.8	287.2	274.1	266.2	239.4	175.2	137.9	183.4
57,5°	275.1	331.1	387.4	363.5	360.2	332.0	315.0	264.3	251.8	246.9	216.5	162.1	112.6	149.3
60,0°	281.3	339.2	390.3	376.3	355.6	345.5	321.2	254.1	228.2	220.7	186.3	148.0	93.7	112.6
62,5°	269.5	330.4	386.4	374.6	338.6	343.5	316.3	244.9	214.5	205.0	159.8	120.2	74.3	90.7
65,0°	229.2	268.8	336.6	398.5	351.4	308.1	294.7	240.4	201.4	181.7	141.5	103.2	62.5	65.8
67,5°	206.0	221.4	312.4	374.9	307.8	279.3	257.4	198.8	173.6	146.7	110.0	78.9	54.0	55.0
70,0°	204.3	219.1	245.3	319.3	273.8	236.4	200.7	145.4	124.4	114.9	92.3	61.6	51.7	46.5
72,5°	146.7	164.1	190.6	227.6	198.8	147.7	124.8	94.0	97.9	101.5	72.4	40.6	35.7	36.0
75,0°	86.1	85.8	98.2	101.5	100.5	76.0	63.2	61.9	65.2	73.7	54.0	31.8	24.6	26.2
77,5°	36.7	35.4	37.7	41.3	45.5	39.3	37.3	31.4	36.7	35.4	28.8	17.0	16.4	17.0
80,0°	17.7	19.3	21.0	21.9	25.5	27.8	25.9	17.0	17.0	14.7	13.4	11.8	12.8	12.1
82,5°	13.1	14.4	15.4	15.7	15.1	14.7	13.4	11.8	10.8	10.5	9.5	8.8	8.2	8.2
85,0°	9.2	9.8	10.2	10.5	10.5	9.8	9.2	8.2	7.9	7.5	7.9	6.5	6.2	5.9
87,5°	5.9	6.2	6.9	6.9	6.9	6.5	6.5	5.9	5.6	5.6	5.2	4.9	4.6	4.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
------------------------------------	--	------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/klm				
Luminous flux in lm/klm				
0,0°	187.4	187.4	0.3	0.3
2,5°	190.6	190.9	2.3	2.5
5,0°	203.7	201.4	4.8	7.3
7,5°	220.4	224.0	7.5	14.8
10,0°	247.2	248.2	10.5	25.3
12,5°	253.5	257.1	13.2	38.5
15,0°	259.3	263.3	15.1	53.6
17,5°	271.1	284.2	16.6	70.2
20,0°	263.6	273.1	17.9	88.1
22,5°	258.7	266.6	19.4	107.6
25,0°	246.3	256.7	21.1	128.6
27,5°	257.7	272.8	23.6	152.2
30,0°	269.2	279.3	26.7	178.9
32,5°	278.7	287.5	29.6	208.6
35,0°	273.8	300.0	32.9	241.4
37,5°	274.1	296.4	36.5	277.9
40,0°	255.7	281.9	39.7	317.6
42,5°	265.9	294.1	43.2	360.8
45,0°	275.1	303.9	46.8	407.6
47,5°	274.7	305.2	50.3	457.9
50,0°	266.9	302.6	53.3	511.2
52,5°	263.0	296.4	55.9	567.2
55,0°	243.3	282.3	58.6	625.8
57,5°	211.2	263.3	59.9	685.7
60,0°	165.7	212.2	58.5	744.1
62,5°	122.5	153.6	54.9	799.0
65,0°	83.2	108.7	50.2	849.2
67,5°	58.3	85.8	44.8	894.0
70,0°	53.4	75.3	39.2	933.3
72,5°	40.9	61.6	29.9	963.2
75,0°	27.5	34.4	17.3	980.5
77,5°	19.0	21.3	8.2	988.7
80,0°	10.8	11.1	4.5	993.2
82,5°	8.2	8.5	3.1	996.3
85,0°	5.9	6.2	2.2	998.4
87,5°	4.3	4.3	1.5	1000.0
90,0°	0.0	0.0	0.0	1000.0
105,0°	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	1000.0
135,0°	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family DL® 30 LED	Order number: 5XA513281B08A5 EAN: 4058352058688	LP number 57202_7
-----------------------------	--	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	4590	49.0	50.5	49.8
95	241	4355	45.9	47.3	46.6
90	229	4138	43.3	44.6	44.0
85	216	3903	40.4	41.6	41.0
80	203	3668	37.6	38.7	38.2
75	190	3433	34.8	35.8	35.3
70	178	3217	32.3	33.3	32.8
65	165	2982	29.7	30.5	30.1
60	152	2747	27.2	27.9	27.6
55	140	2530	24.9	25.5	25.2
50	127	2295	22.4	23.0	22.7
45	114	2060	20.0	20.6	20.3
40	102	1843	17.9	18.4	18.2
35	89	1608	15.6	16.0	15.8
30	76	1373	13.3	13.7	13.5
25	63	1138	11.1	11.4	11.2
20	51	922	9.0	9.2	9.1
18	45	813	8.0	8.2	8.1