


Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
	Version post-top- or mounting to wall arm, spreader element, structured Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1390 lm Power consumption = 12.9 W Luminous efficacy = 107.8 lm/W	serial documentation 07.07.2022
		

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 610 cd/klm**

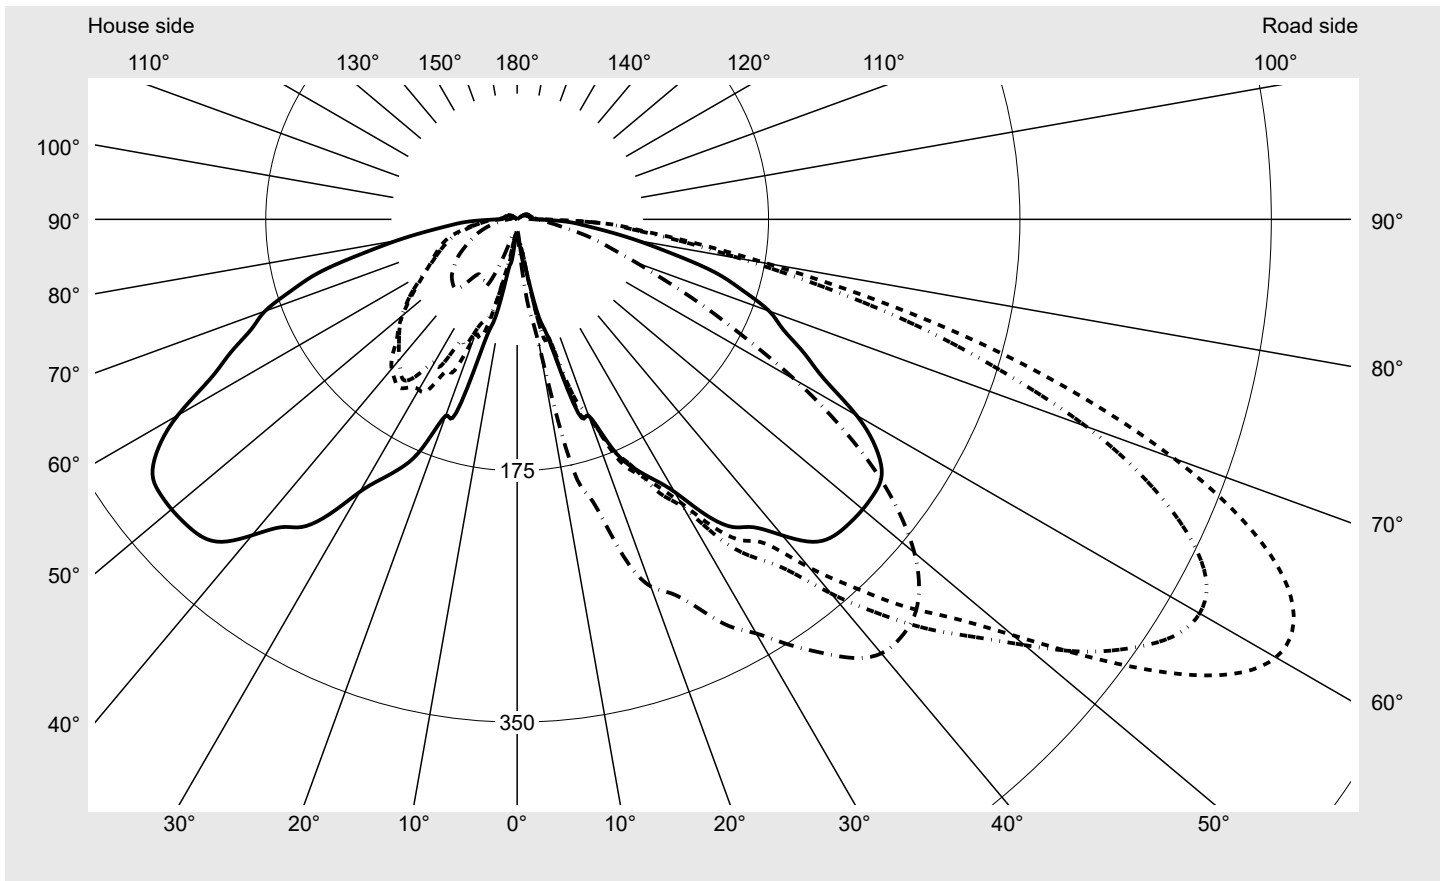

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	97.2%
Eta 90° - 180°	2.8%


Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	486.7
Imax 80°	176.6
Imax 90°	16.1
Imax >90°	12.6
Imax >95°	10.8

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
--------------------------------------	---------------------------------------------------------------------------------------------	------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

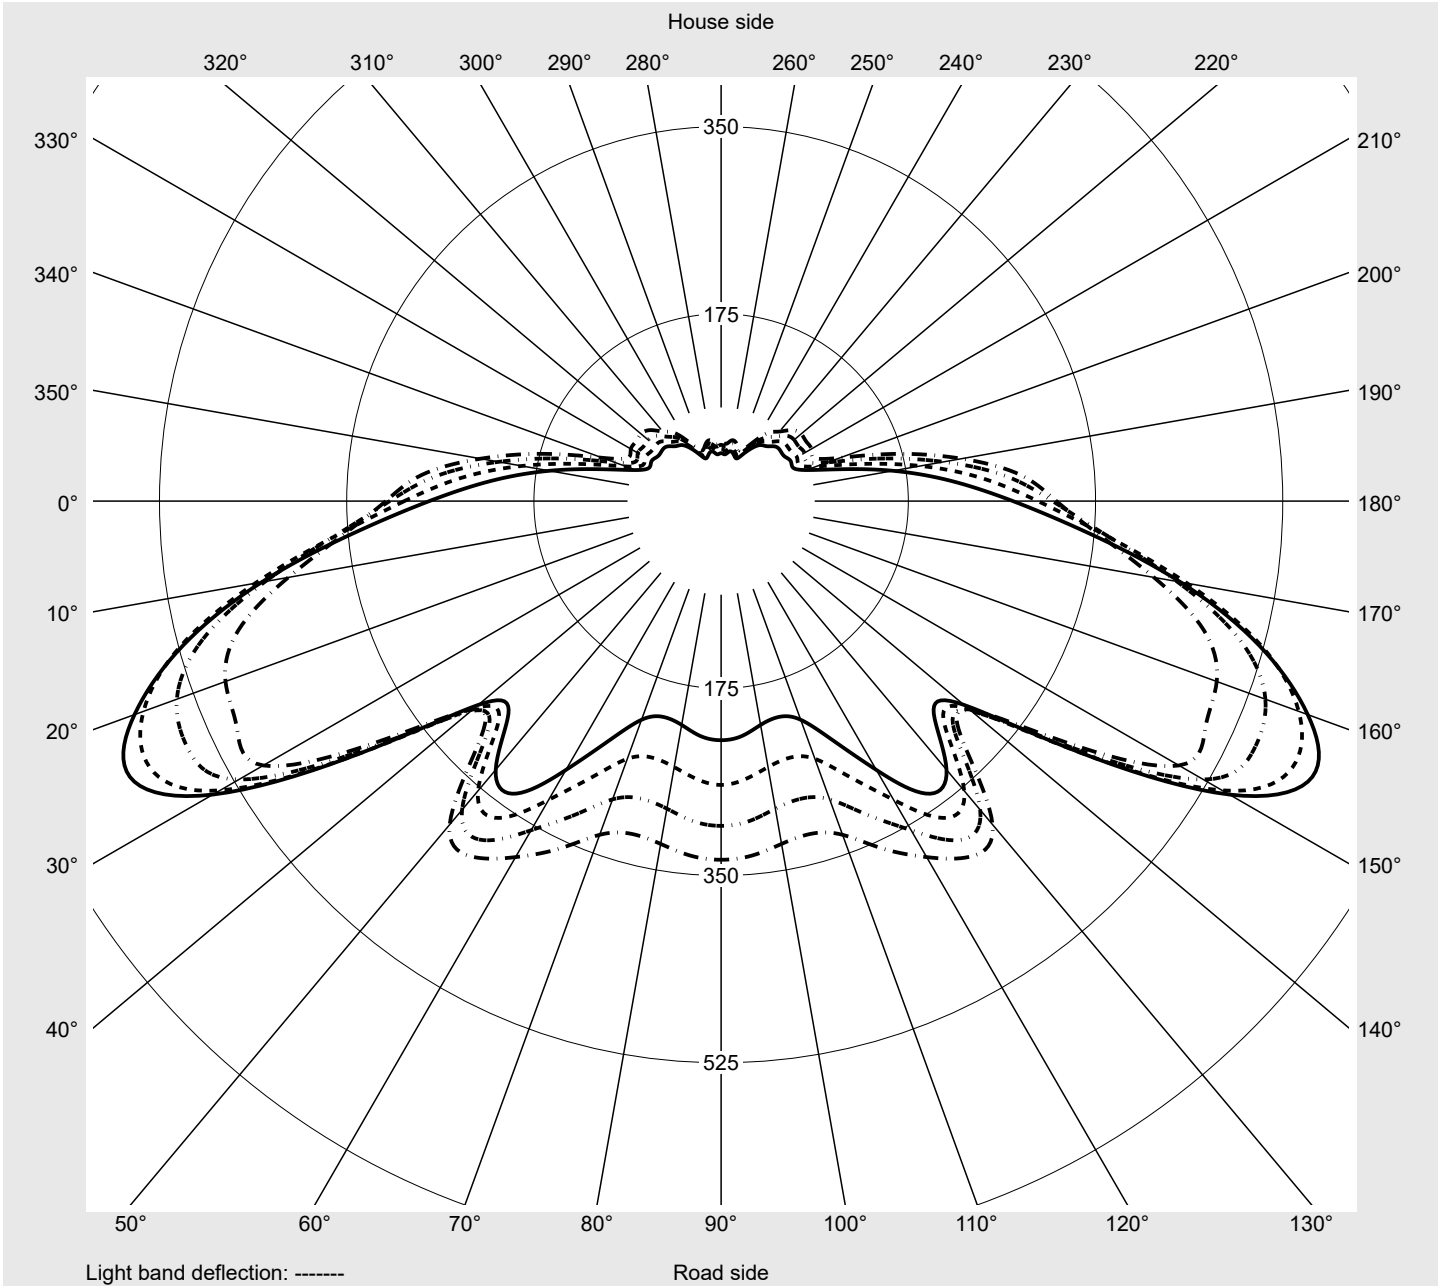

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	10.8	10.8	10.8	10.8	10.8	10.8	10.8	11.1	11.1	11.4	11.4	11.7	11.7
5,0°	12.3	13.4	14.3	15.5	16.7	17.6	18.2	18.8	19.7	20.9	23.0	24.8	26.0
7,5°	29.3	30.5	30.8	28.7	24.8	20.0	17.9	19.4	24.5	30.8	38.5	45.1	49.3
10,0°	37.1	34.1	36.8	39.7	38.8	34.4	33.5	41.8	58.9	74.1	85.2	89.3	88.4
12,5°	69.6	85.5	94.1	97.7	92.0	83.7	84.3	76.8	79.5	87.5	100.7	112.6	121.0
15,0°	89.6	82.5	90.8	100.7	100.1	89.0	85.5	89.6	101.0	121.3	137.2	147.3	167.6
17,5°	141.3	148.2	135.7	136.3	142.5	138.9	126.7	114.1	112.1	141.0	154.8	159.9	178.7
20,0°	145.5	161.4	156.6	154.5	156.3	147.3	145.5	134.5	133.3	159.3	177.5	183.5	206.8
22,5°	172.1	187.6	183.2	183.5	181.7	177.5	173.3	151.8	139.8	170.9	196.6	206.8	230.1
25,0°	190.6	205.3	201.7	205.9	201.1	194.5	189.7	167.6	153.9	180.5	214.2	222.3	242.9
27,5°	203.5	216.9	214.5	215.1	210.7	208.3	214.8	184.7	166.4	202.9	244.1	246.8	274.3
30,0°	219.0	233.4	234.6	236.4	229.8	227.7	231.9	199.0	183.2	223.8	263.5	272.2	298.8
32,5°	243.5	256.7	259.1	260.9	254.0	253.7	264.4	223.2	199.9	252.5	308.4	311.9	332.0
35,0°	261.5	273.7	277.9	280.6	273.7	272.8	287.1	241.4	220.8	271.6	335.0	339.1	356.5
37,5°	270.1	280.3	281.8	286.8	281.2	284.8	306.9	256.1	234.3	291.9	359.5	367.8	383.4
40,0°	287.1	299.1	306.9	317.0	311.4	316.4	340.0	280.9	250.4	311.1	388.7	397.4	407.0
42,5°	304.5	317.0	332.0	348.4	340.3	347.8	372.0	306.9	266.2	324.8	404.9	412.0	417.1
45,0°	311.6	328.7	352.6	375.0	371.4	381.0	402.8	330.2	281.5	331.7	410.9	419.2	420.1
47,5°	313.4	335.6	367.2	400.1	401.9	410.6	430.0	352.6	290.4	331.7	411.4	421.3	418.6
50,0°	314.0	343.6	388.4	429.7	440.7	450.3	461.1	374.7	300.3	328.7	405.2	416.8	406.1
52,5°	313.4	353.8	410.9	467.3	493.0	499.6	494.2	392.9	303.0	320.9	394.7	405.8	384.3
55,0°	309.9	360.7	432.7	502.3	541.4	549.5	520.5	403.4	305.7	310.5	376.8	386.9	355.3
57,5°	296.1	359.5	442.2	522.9	574.6	589.2	540.8	409.7	302.1	295.2	353.5	361.5	322.4
60,0°	272.8	345.1	436.0	520.5	583.6	609.9	548.6	410.0	296.4	281.2	327.8	333.8	290.1
62,5°	241.1	320.3	414.4	496.9	567.1	609.3	540.5	398.6	283.9	262.6	300.6	302.7	255.2
65,0°	220.5	296.4	386.9	463.1	536.3	588.3	513.9	378.6	271.3	244.4	273.1	272.2	224.4
67,5°	200.5	277.3	359.2	423.4	490.6	546.5	473.6	347.5	248.3	221.7	246.2	241.1	192.7
70,0°	186.8	259.4	330.2	382.5	438.9	486.7	421.6	311.4	224.7	199.0	216.3	217.5	174.5
72,5°	164.6	233.4	292.5	335.6	378.0	413.8	356.5	265.6	193.6	170.9	187.3	193.3	145.8
75,0°	142.5	197.2	244.7	278.8	310.2	334.7	290.7	217.2	158.1	138.9	147.6	158.7	128.2
77,5°	110.9	153.0	188.5	213.9	235.2	250.7	220.2	163.1	116.8	99.5	115.0	133.3	120.7
80,0°	85.2	112.1	136.6	155.1	167.6	176.6	158.7	120.4	90.5	77.4	83.7	99.2	84.3
82,5°	62.7	80.7	97.4	110.3	117.7	123.1	113.8	90.5	69.9	58.9	59.8	69.3	56.2
85,0°	46.3	57.1	68.1	77.4	81.9	84.9	81.0	66.9	51.1	43.9	43.3	47.8	42.4
87,5°	33.2	40.6	48.4	54.7	57.7	58.9	56.8	47.8	36.2	31.4	32.6	36.5	34.1
90,0°	13.4	13.4	14.9	15.8	16.1	15.8	15.2	13.7	12.6	11.7	12.8	14.0	14.9
92,5°	11.1	11.4	12.3	12.6	12.3	12.3	12.0	11.4	9.9	9.3	9.9	11.1	12.0
95,0°	10.5	10.5	11.4	11.7	11.4	11.1	11.1	10.2	9.3	8.7	9.0	10.2	11.1
97,5°	9.6	9.9	10.5	10.8	10.5	10.2	10.2	9.6	8.7	8.1	8.4	9.6	10.2
100,0°	9.0	9.6	9.9	9.9	9.9	9.6	9.3	9.0	8.1	7.8	8.1	9.0	9.6
102,5°	8.4	9.0	9.3	9.3	9.3	9.0	8.7	8.1	7.8	7.5	7.5	8.4	9.0
105,0°	8.4	8.4	8.4	8.7	8.4	8.4	8.1	7.8	7.5	7.2	7.5	7.8	8.7
107,5°	7.8	7.8	8.1	8.4	7.8	7.8	7.5	7.5	6.9	7.2	7.2	7.5	8.1
110,0°	7.2	7.5	7.8	7.8	7.5	7.2	7.2	6.9	6.6	6.6	6.9	7.2	7.8
112,5°	6.9	7.2	7.2	7.2	6.9	6.9	6.6	6.6	6.6	6.6	6.6	6.9	7.5

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	11.7	11.7	11.7	11.7	12.0	12.0	10.8	10.8	10.5	10.8	10.5	10.5	10.2
5,0°	26.9	27.5	28.1	28.4	28.4	28.1	12.0	11.7	11.4	11.1	10.8	10.8	10.5
7,5°	53.5	58.9	63.0	64.5	63.9	62.7	26.6	22.4	18.5	15.5	13.4	12.0	11.4
10,0°	89.3	89.6	92.6	92.6	91.4	92.0	40.3	42.1	38.5	35.6	29.9	22.7	17.3
12,5°	134.5	147.0	155.1	162.0	171.2	176.3	60.7	46.0	36.8	33.8	40.0	42.7	41.2
15,0°	186.5	190.6	198.1	199.9	200.5	203.2	89.6	81.9	77.7	72.9	71.1	66.6	49.6
17,5°	205.3	221.4	237.2	246.8	248.6	245.6	119.8	109.1	103.1	99.8	86.7	74.1	57.4
20,0°	230.7	245.9	252.8	260.6	268.6	271.9	151.5	142.2	116.8	100.1	87.3	80.7	68.1
22,5°	254.0	257.6	270.7	283.3	283.9	282.1	161.1	140.7	129.4	127.9	113.8	95.0	74.4
25,0°	268.9	283.6	291.0	296.7	297.3	298.8	180.2	164.0	150.6	137.2	116.2	93.5	74.4
27,5°	306.0	313.4	313.1	315.2	316.1	319.1	190.9	174.8	160.8	149.7	133.9	115.0	92.3
30,0°	323.6	329.6	332.6	337.0	334.1	332.9	207.1	184.7	164.0	150.0	136.9	114.4	91.7
32,5°	351.4	355.0	355.6	353.5	350.8	350.8	228.0	204.4	177.5	158.4	138.6	127.9	109.4
35,0°	375.3	378.3	373.5	369.9	368.4	368.1	246.2	218.1	188.8	166.4	143.1	136.9	127.3
37,5°	397.7	391.7	381.9	379.5	381.9	384.9	253.4	222.9	190.3	165.2	140.1	133.3	129.4
40,0°	412.3	399.5	387.5	385.8	390.5	394.4	271.6	236.7	198.4	165.8	136.0	127.9	126.7
42,5°	417.7	401.9	388.7	388.7	393.5	395.0	286.3	245.6	202.0	161.7	128.5	121.9	123.7
45,0°	418.3	398.0	384.3	384.6	389.3	390.8	291.6	245.9	198.7	151.8	118.6	116.2	119.8
47,5°	409.4	384.9	372.0	372.9	378.0	379.5	292.2	244.4	194.2	142.2	112.1	110.9	113.2
50,0°	387.8	361.8	350.8	353.5	359.2	361.0	288.6	238.1	182.9	129.7	104.3	104.6	105.5
52,5°	358.6	332.0	322.1	325.4	332.6	335.3	280.9	228.3	170.6	118.3	95.9	97.4	97.1
55,0°	323.6	296.7	288.0	291.9	300.3	303.6	267.4	211.3	153.6	105.8	87.8	89.9	88.7
57,5°	284.5	256.4	248.3	252.5	260.9	265.3	245.0	189.1	133.9	94.7	80.4	81.9	80.4
60,0°	246.5	217.5	208.9	212.4	220.5	223.5	216.0	163.1	115.0	84.9	74.1	75.0	72.6
62,5°	208.9	179.3	169.7	172.7	179.6	179.9	185.9	137.4	99.8	77.4	68.7	68.1	64.8
65,0°	178.1	147.6	137.4	139.2	144.3	144.0	162.0	118.6	88.7	72.3	64.8	63.0	58.6
67,5°	148.8	119.5	108.8	109.1	110.6	112.3	143.4	104.3	81.6	67.8	61.0	58.6	53.2
70,0°	126.4	97.7	87.0	85.5	86.4	88.4	129.1	94.1	75.3	64.2	57.7	54.4	48.1
72,5°	104.9	79.5	68.7	66.0	67.2	70.5	113.5	84.0	69.0	59.2	53.8	50.2	43.0
75,0°	87.3	65.1	55.6	52.3	54.1	58.0	97.1	73.2	61.9	53.8	49.3	46.0	38.8
77,5°	71.7	50.8	43.0	40.6	42.1	45.4	78.3	61.3	52.9	46.6	43.0	40.0	33.8
80,0°	53.5	39.7	33.8	32.0	32.3	33.5	61.3	49.9	44.2	39.4	36.5	34.1	29.0
82,5°	41.8	32.3	27.8	26.0	25.7	26.3	48.4	40.6	36.5	32.9	30.8	29.0	24.8
85,0°	33.8	26.9	23.6	21.8	21.2	20.9	37.4	32.6	29.9	27.2	25.7	23.9	20.9
87,5°	28.7	23.6	21.2	19.4	18.2	17.9	28.4	25.4	23.9	21.8	20.3	19.1	17.3
90,0°	14.6	14.0	13.7	13.4	13.1	13.1	13.4	12.8	12.8	12.3	12.0	11.4	10.8
92,5°	12.0	12.6	12.6	12.3	12.3	12.0	11.4	11.1	10.8	10.2	9.9	9.6	9.0
95,0°	11.4	11.4	11.7	11.7	11.4	11.4	10.2	10.2	9.9	9.3	9.0	8.7	7.8
97,5°	10.5	10.8	10.8	10.8	10.8	10.8	9.6	9.6	9.3	8.7	8.4	7.8	7.5
100,0°	9.9	10.2	10.2	10.2	10.2	10.2	9.0	9.0	8.4	8.1	7.8	7.2	6.9
102,5°	9.6	9.6	9.6	9.6	9.6	9.6	8.4	8.4	7.8	7.5	7.2	6.9	6.3
105,0°	9.0	9.0	9.6	9.6	9.3	9.0	7.8	7.8	7.5	7.2	6.6	6.3	6.0
107,5°	8.4	8.7	9.0	9.0	9.0	9.0	7.2	7.2	6.9	6.6	6.3	6.0	5.7
110,0°	8.1	8.4	8.4	8.4	8.4	8.4	7.2	6.9	6.6	6.3	6.0	5.7	5.4
112,5°	7.8	7.8	8.1	8.4	8.4	8.4	6.6	6.6	6.3	6.0	5.7	5.4	5.1

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	0.0	0.0
2,5°	10.5	10.8	10.5	10.5	10.5	10.8	10.8	10.8	10.5	10.5	10.8	0.1	0.1
5,0°	10.5	10.8	10.8	10.5	10.2	10.2	10.2	10.2	10.5	10.2	10.2	0.4	0.5
7,5°	11.1	10.8	10.8	10.8	10.8	10.8	10.8	10.2	10.2	9.9	10.2	0.9	1.5
10,0°	13.7	12.3	11.7	11.4	11.4	11.4	10.8	10.8	10.2	9.9	9.6	2.0	3.5
12,5°	33.2	24.8	17.0	13.1	12.0	12.0	11.4	10.5	9.9	9.6	9.6	4.1	7.6
15,0°	42.1	47.8	40.6	34.4	21.2	14.6	12.6	11.4	10.5	9.9	9.6	6.4	14.0
17,5°	45.7	37.6	32.9	29.3	35.0	30.8	23.0	20.6	15.5	14.3	13.7	9.3	23.3
20,0°	58.0	54.1	45.7	35.9	35.0	26.9	20.0	25.7	29.9	29.9	27.5	11.9	35.2
22,5°	59.5	50.8	41.5	38.2	37.9	34.4	27.2	35.0	36.8	42.4	42.4	14.9	50.1
25,0°	59.5	49.6	41.5	39.7	39.1	36.2	33.8	38.8	44.2	48.1	51.4	17.8	67.9
27,5°	69.3	54.7	43.3	42.1	42.1	42.7	46.3	52.6	46.9	50.2	49.0	21.3	89.2
30,0°	72.3	61.9	53.8	48.1	43.9	40.3	40.6	49.6	46.3	50.2	49.0	24.6	113.8
32,5°	90.2	73.8	56.5	49.9	49.6	47.8	47.2	50.2	45.1	47.2	47.8	29.0	142.8
35,0°	117.7	100.1	82.8	70.5	61.6	51.7	46.3	50.5	46.3	46.3	46.6	33.5	176.3
37,5°	124.9	111.2	95.0	84.6	70.2	55.9	48.1	55.3	53.8	52.0	52.0	37.2	213.5
40,0°	123.1	108.2	94.7	85.5	71.1	58.6	54.7	62.7	63.3	61.6	62.2	41.4	254.9
42,5°	121.6	107.6	95.0	86.7	72.6	60.1	55.0	63.3	64.8	63.9	64.5	45.1	300.0
45,0°	118.9	106.7	93.8	86.1	72.3	60.4	55.3	61.6	63.6	62.2	63.3	48.1	348.2
47,5°	113.5	103.7	92.0	84.9	71.7	59.2	54.1	60.1	62.2	59.5	61.6	50.5	398.7
50,0°	106.4	98.6	88.4	81.6	69.3	57.4	52.9	58.0	61.0	57.7	59.2	52.3	451.0
52,5°	97.7	93.8	84.9	78.3	66.3	55.0	50.5	55.6	57.7	53.8	55.6	53.7	504.6
55,0°	89.0	86.4	78.6	72.6	62.7	52.3	48.1	52.9	54.4	51.1	52.6	54.2	558.8
57,5°	80.4	78.9	72.3	68.1	59.8	49.9	45.1	48.4	50.8	47.2	49.0	53.5	612.4
60,0°	72.6	72.0	66.9	63.9	57.1	48.4	42.4	45.1	47.2	43.9	44.8	51.8	664.2
62,5°	64.8	65.1	61.9	61.0	55.3	47.2	39.4	41.2	43.3	40.3	40.6	48.9	713.0
65,0°	58.6	59.5	57.4	57.7	53.2	45.4	37.4	37.6	39.4	36.5	37.1	45.7	758.7
67,5°	52.9	54.1	52.6	54.1	50.5	43.3	35.3	34.1	35.0	32.9	32.9	41.9	800.6
70,0°	47.8	49.3	49.3	50.8	48.1	41.8	33.2	31.7	31.1	29.3	29.9	38.1	838.7
72,5°	42.4	43.6	43.9	45.7	43.6	38.2	32.0	29.3	28.1	26.0	26.3	33.5	872.2
75,0°	37.1	37.9	38.2	39.7	37.6	32.9	28.4	26.3	24.5	22.7	22.7	28.3	900.5
77,5°	31.4	31.7	31.4	32.9	31.1	27.2	23.6	22.1	21.2	19.1	19.1	22.5	923.0
80,0°	26.0	25.4	24.5	26.3	25.4	22.4	20.0	18.5	17.6	15.8	15.5	17.1	940.1
82,5°	22.1	20.3	19.7	21.2	20.3	18.8	17.0	15.8	14.6	13.4	12.6	12.9	953.0
85,0°	18.2	16.1	15.5	17.0	16.4	14.9	13.7	13.4	12.3	11.1	10.2	9.7	962.7
87,5°	14.6	12.0	11.4	12.8	12.8	12.3	11.4	11.1	10.5	9.0	7.8	7.4	970.1
90,0°	9.3	7.2	7.5	8.7	9.3	9.3	9.0	8.4	8.1	6.6	6.0	3.3	973.4
92,5°	7.5	5.7	5.7	6.6	7.2	7.2	7.2	6.9	6.3	5.4	4.8	2.7	976.1
95,0°	7.2	5.7	5.1	6.0	6.6	6.3	6.0	6.0	5.7	5.1	4.2	2.5	978.5
97,5°	6.6	5.4	4.8	5.4	5.7	5.7	5.4	5.4	5.1	4.5	4.2	2.3	980.8
100,0°	6.0	5.1	4.5	4.8	5.4	5.1	5.1	4.8	4.8	4.5	4.2	2.1	982.9
102,5°	5.7	4.8	4.2	4.5	4.8	4.8	4.8	4.8	4.5	4.2	4.2	2.0	984.9
105,0°	5.7	4.8	4.2	4.2	4.8	4.2	4.2	4.2	4.2	4.2	3.6	1.8	986.7
107,5°	5.1	4.5	4.2	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.6	1.7	988.5
110,0°	5.1	4.5	3.9	4.2	4.2	3.9	4.2	4.2	3.9	3.6	3.6	1.6	990.1
112,5°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.5	991.6

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	6.6	6.6	6.9	6.9	6.9	6.6	6.6	6.3	6.3	6.6	6.6	6.6	6.9
117,5°	6.0	6.3	6.6	6.6	6.3	6.0	6.0	6.0	6.0	6.0	6.0	6.6	6.6
120,0°	6.0	6.0	6.0	6.0	5.7	5.7	5.4	5.4	5.7	6.0	6.0	6.0	6.3
122,5°	5.1	5.4	5.4	5.4	5.1	4.8	4.8	4.8	5.4	5.4	5.4	5.4	5.7
125,0°	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.9	4.2	4.2	4.2	4.2	4.2
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.4	2.4	2.7	2.7	2.7	2.7	2.7
130,0°	1.8	1.8	1.8	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.5	1.5	1.5	1.2	1.8
135,0°	1.8	1.8	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	0.6
140,0°	1.5	1.2	1.2	1.2	0.9	0.9	0.9	0.6	0.9	0.6	0.6	0.6	0.6
142,5°	1.8	1.5	1.2	1.2	1.2	0.9	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	1.2	1.2	1.5	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.6	0.6	0.6
147,5°	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.6	0.6	0.6	0.6
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	7.5	7.8	7.8	7.8	7.8	7.8	6.6	6.0	6.0	5.7	5.4	5.4	4.8
117,5°	7.2	7.5	7.8	7.8	7.8	7.8	6.0	6.0	5.4	5.4	5.1	4.8	4.8
120,0°	6.6	6.9	7.2	7.2	7.2	7.2	5.4	5.4	5.4	4.8	4.8	4.8	4.5
122,5°	5.7	6.3	6.6	6.6	6.6	6.6	5.1	4.8	4.8	4.5	4.2	4.2	4.2
125,0°	4.5	4.8	4.8	4.8	4.8	4.8	3.9	3.9	3.6	3.6	3.6	3.6	3.3
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	2.1	2.4
132,5°	1.2	1.2	1.5	1.5	1.5	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8
137,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.5	1.8	1.8	1.5	1.8	1.8
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.8	1.5	1.2	1.2	1.2	1.2	1.2
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	0.9	1.2	1.2	1.2	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.4	993.0
117,5°	4.5	4.2	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.3	994.4
120,0°	4.2	3.9	3.6	3.3	3.0	3.0	3.0	3.3	3.6	3.6	3.6	1.2	995.6
122,5°	3.9	3.9	3.6	3.3	3.0	3.0	3.0	3.0	3.0	3.3	3.6	1.1	996.7
125,0°	3.0	3.0	3.0	3.0	2.7	2.4	2.4	2.7	3.0	3.0	3.0	0.8	997.5
127,5°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.4	2.4	2.4	0.6	998.1
130,0°	2.1	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	1.8	0.4	998.5
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	998.8
135,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	999.1
137,5°	1.8	1.5	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.4
140,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.5
142,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.2	999.7
145,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.2	999.9
147,5°	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	1.2	0.6	1.2	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H + 5XA54000XS EAN: 4058352835111 + 4050737730073	LP number 59107_24
---------------------------------------------	---------------------------------------------------------------------------------------------	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1390	12.9	13.3	13.1
95	241	252	1319	12.2	12.6	12.4
90	229	250	1253	11.5	11.9	11.7
85	216	248	1182	10.7	11.1	10.9
80	203	246	1111	10.1	10.5	10.3
75	190	243	1040	9.4	9.8	9.6
70	178	241	974	8.9	9.1	9.0
65	165	238	903	8.2	8.4	8.3
60	152	235	832	7.6	7.8	7.7
55	140	232	766	7.0	7.2	7.1
50	127	229	695	6.4	6.6	6.5
45	114	225	624	5.8	6.0	5.9
40	102	221	558	5.3	5.4	5.4
35	89	216	487	4.8	4.9	4.8
30	76	210	416	4.3	4.3	4.3
25	63	203	345	3.7	3.8	3.8
24	60	201	328	3.5	3.7	3.6