
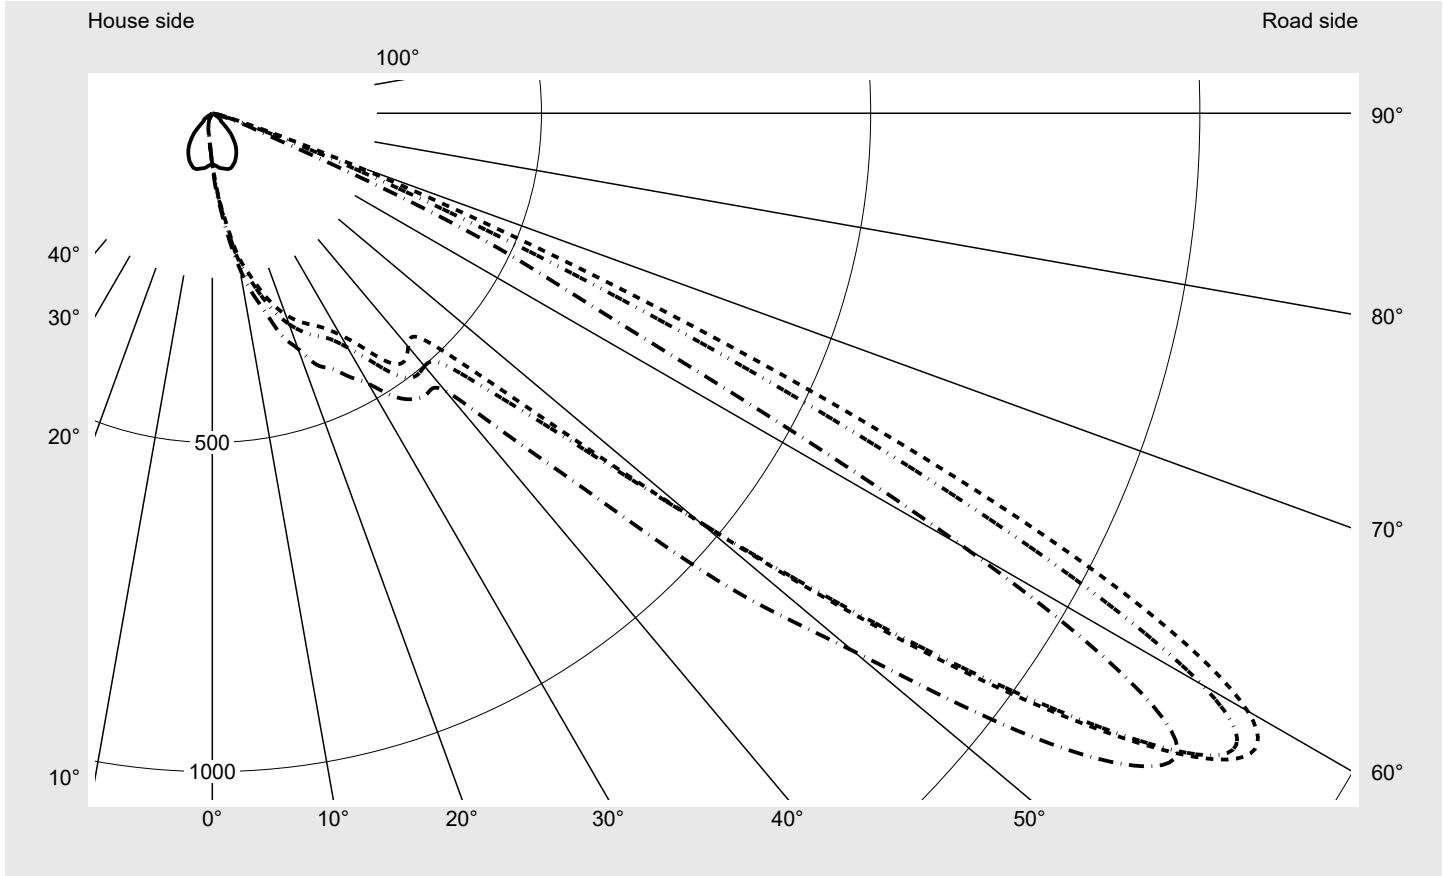


Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
	Version standard bracket Optic asymmetric distribution PL33T with Back Light Control Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 86950 lm Power consumption = 968.3 W Luminous efficacy = 89.8 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1827 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	279.0
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032


Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
----------------------------------	--	------------------------------

Envelope curve in cd/klm

KMK 57.5°
KMK 55°
KMK 52.5°
KMK 50°

siteco

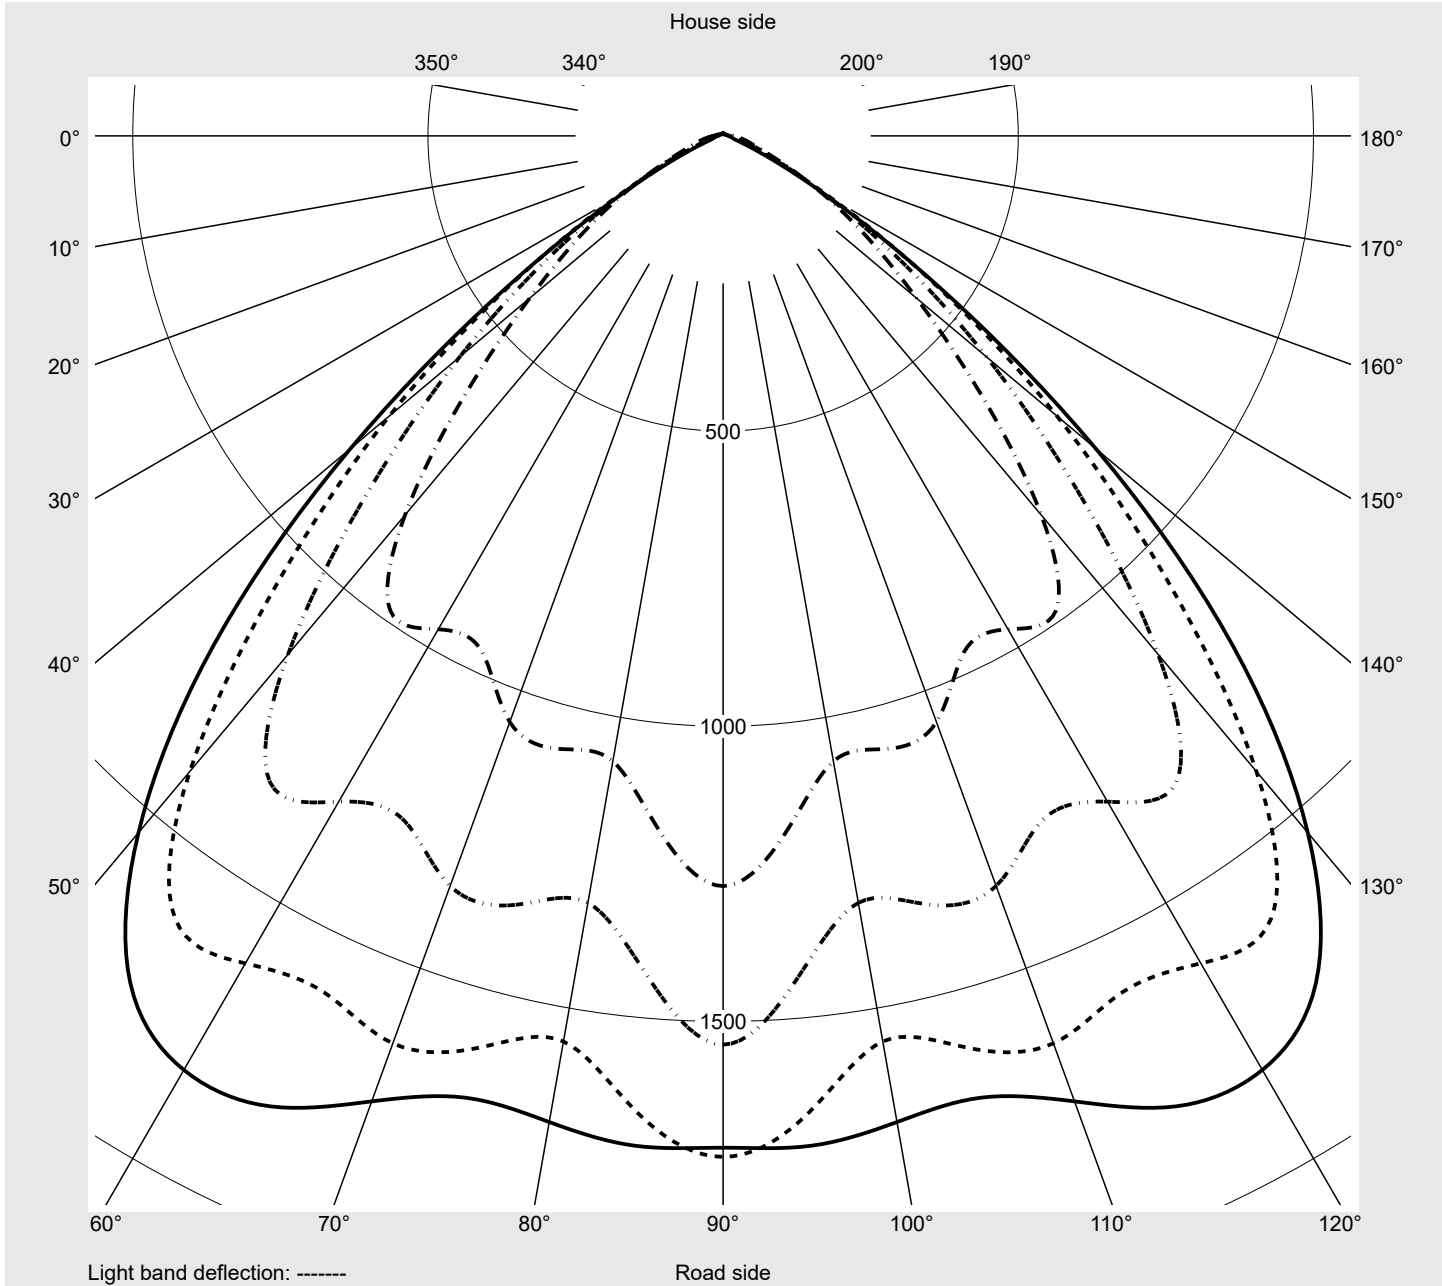

Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	78.7	80.9	83.2	85.5	87.9	90.2	92.5	94.7	96.8	98.7	100.3	101.7	103.0
5,0°	81.0	85.9	91.1	96.3	101.7	106.8	111.9	116.8	121.5	125.9	130.1	133.8	137.2
7,5°	83.6	90.4	97.6	104.4	111.3	118.8	126.6	134.7	143.3	151.5	159.2	166.0	172.2
10,0°	85.0	93.4	102.2	112.3	123.9	136.3	148.9	161.9	174.6	186.3	197.0	206.8	216.2
12,5°	86.2	97.0	109.7	124.0	139.3	153.7	167.4	181.9	196.5	209.8	222.6	234.9	246.2
15,0°	87.7	100.9	115.8	132.0	147.8	163.1	179.8	198.2	215.3	231.3	246.7	261.5	275.2
17,5°	88.0	102.5	118.7	135.8	153.7	172.9	193.3	214.9	234.3	252.0	269.1	287.2	303.4
20,0°	86.8	102.5	120.0	138.8	159.2	181.7	205.9	229.0	248.3	266.7	286.7	307.2	325.5
22,5°	83.9	100.7	120.4	141.0	164.1	189.7	215.0	237.4	256.5	277.2	300.0	322.1	341.6
25,0°	81.0	98.7	119.7	142.3	167.0	193.6	218.5	239.8	261.7	285.3	309.5	332.5	354.2
27,5°	76.9	95.7	117.1	139.7	166.5	194.0	219.3	243.3	269.3	294.6	319.1	343.8	367.8
30,0°	72.6	91.8	112.3	135.8	164.6	194.3	222.7	251.6	282.1	309.9	335.5	362.4	388.9
32,5°	67.8	86.4	106.5	131.5	162.4	194.6	227.9	264.7	300.0	331.7	362.1	391.8	419.5
35,0°	62.3	79.9	100.0	125.5	156.6	193.0	233.1	277.3	318.4	357.3	393.6	428.5	459.5
37,5°	55.6	72.4	91.9	115.7	146.8	186.9	232.5	279.5	321.6	359.8	398.6	438.8	476.6
40,0°	48.1	63.8	82.2	103.6	133.9	179.0	230.4	276.2	310.9	343.2	379.9	420.0	462.9
42,5°	40.4	54.7	72.1	93.1	124.1	172.2	230.8	276.5	306.8	338.3	375.1	415.2	461.2
45,0°	28.5	39.1	53.5	74.9	107.3	161.3	226.4	277.5	311.4	364.8	435.7	495.8	538.7
47,5°	18.6	24.9	34.6	51.9	82.5	136.2	207.9	274.8	342.6	448.9	583.6	675.7	696.9
50,0°	16.9	24.4	35.1	48.6	70.6	115.0	191.5	295.6	427.8	615.6	838.2	982.4	965.1
52,5°	15.3	22.9	34.0	45.1	62.8	106.6	198.7	364.0	582.7	847.4	1146.7	1337.5	1302.2
55,0°	11.5	16.8	24.5	31.4	47.2	96.7	214.4	437.6	738.2	1063.3	1405.4	1618.5	1618.5
57,5°	8.2	10.7	14.5	18.4	31.5	79.5	202.9	448.3	823.7	1220.9	1540.7	1751.0	1827.0
60,0°	6.7	7.8	9.8	12.7	21.9	56.1	149.1	361.7	748.8	1177.8	1460.2	1699.7	1815.7
62,5°	6.1	6.9	8.4	10.6	15.5	34.4	88.1	222.4	499.7	869.7	1119.1	1425.2	1522.3
65,0°	5.7	6.3	7.5	9.1	11.8	22.2	51.1	117.7	270.5	520.5	769.3	1042.5	1025.9
67,5°	5.1	5.5	6.5	7.7	9.6	17.0	33.4	62.1	125.3	263.0	464.6	610.3	538.4
70,0°	4.5	4.9	5.5	6.2	7.7	11.0	16.8	26.2	47.4	102.5	209.4	279.0	215.6
72,5°	3.7	4.1	4.4	5.1	6.1	7.4	9.3	13.1	20.5	37.7	74.6	99.7	70.8
75,0°	3.0	3.2	3.5	4.1	4.9	6.3	7.2	9.1	12.2	17.4	28.3	36.6	27.1
77,5°	2.1	2.4	2.5	2.9	3.4	4.5	4.8	5.8	7.3	9.0	12.2	15.7	12.4
80,0°	1.5	1.9	1.9	1.9	2.2	2.6	2.9	3.5	4.0	5.0	7.3	8.4	6.1
82,5°	1.1	1.4	1.4	1.4	1.4	1.6	1.7	1.9	2.3	2.8	3.8	4.0	3.3
85,0°	0.6	0.8	0.8	0.6	0.7	0.8	0.9	1.0	1.0	1.2	1.5	1.7	1.6
87,5°	0.2	0.3	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	104.1	105.1	105.9	106.5	107.0	112.3	76.6	74.7	72.8	71.0	69.1	67.4	65.8
5,0°	140.3	143.0	145.3	147.1	148.3	146.7	76.4	72.2	68.4	64.8	61.5	58.4	55.7
7,5°	177.7	182.2	185.7	188.5	190.4	191.5	77.2	71.2	65.4	60.2	55.6	51.7	48.3
10,0°	224.4	230.9	235.3	238.4	240.5	239.0	77.0	69.7	62.6	56.0	50.0	45.4	41.5
12,5°	255.6	262.6	268.6	273.4	277.0	279.4	76.3	67.5	59.2	51.9	45.6	40.6	36.7
15,0°	286.7	296.0	303.7	309.5	313.4	313.3	75.2	64.9	56.5	48.6	41.5	36.0	32.0
17,5°	317.0	327.9	336.9	343.9	349.0	355.4	74.5	61.9	51.7	44.0	36.8	31.6	27.7
20,0°	340.8	353.5	364.8	373.4	379.7	380.7	72.2	59.2	48.8	39.8	32.2	27.3	24.0
22,5°	359.1	374.1	386.5	397.4	406.1	413.1	69.7	56.9	44.7	35.3	27.8	23.4	20.0
25,0°	373.2	389.3	403.5	416.3	425.0	427.8	66.5	53.0	40.9	31.3	24.2	19.5	16.5
27,5°	386.3	403.2	421.5	435.9	444.5	451.3	61.6	48.1	36.6	27.1	20.4	16.2	13.6
30,0°	411.0	431.7	450.0	463.4	472.8	474.6	56.4	43.3	32.3	23.5	17.2	13.7	11.6
32,5°	444.8	466.8	485.4	495.9	502.4	508.8	51.3	38.6	28.3	20.0	14.9	12.0	10.4
35,0°	484.4	504.1	515.2	522.8	527.6	530.1	46.0	34.1	24.3	17.1	13.1	10.8	9.4
37,5°	504.3	520.2	527.4	530.7	535.1	536.6	40.8	29.9	20.5	14.7	11.6	10.0	8.5
40,0°	501.6	525.3	535.5	542.1	547.5	550.1	35.2	25.6	17.5	12.9	10.6	9.4	7.9
42,5°	515.5	563.6	583.8	597.2	621.6	660.8	29.8	21.3	15.1	11.4	9.6	8.5	7.4
45,0°	597.2	675.0	705.3	720.2	788.4	826.2	22.0	17.2	13.2	10.4	8.8	7.5	6.6
47,5°	732.9	825.1	861.2	872.8	964.4	1068.6	15.1	12.6	10.9	9.3	8.1	6.8	6.0
50,0°	965.1	1056.6	1075.0	1075.7	1188.4	1270.7	12.9	10.8	9.4	8.0	7.0	6.1	5.3
52,5°	1279.2	1352.0	1348.1	1319.2	1433.7	1539.3	11.4	9.5	8.2	7.0	5.9	5.3	4.7
55,0°	1600.4	1635.8	1599.0	1557.7	1661.2	1729.4	9.2	8.1	7.1	6.3	5.3	4.6	4.2
57,5°	1813.9	1740.4	1686.7	1696.2	1717.1	1713.9	7.0	6.3	5.9	5.5	4.7	4.2	3.8
60,0°	1735.8	1537.9	1506.4	1585.6	1431.2	1321.6	6.0	5.4	5.2	4.7	4.2	3.9	3.7
62,5°	1317.0	1096.2	1102.2	1162.6	929.0	734.3	5.4	4.9	4.7	4.2	3.8	3.7	3.6
65,0°	787.3	613.8	652.3	654.1	523.1	453.2	5.1	4.7	4.4	4.0	3.7	3.6	3.5
67,5°	368.9	284.2	292.2	239.9	192.2	140.2	4.7	4.2	3.9	3.7	3.5	3.4	3.3
70,0°	132.6	123.6	117.9	81.6	62.4	60.8	4.3	3.9	3.6	3.4	3.3	3.3	3.3
72,5°	44.5	48.6	40.3	24.6	18.7	16.9	3.4	3.1	3.0	3.0	3.0	3.1	3.1
75,0°	20.0	21.0	14.3	9.3	9.1	10.9	2.6	2.2	2.1	2.3	2.5	2.6	2.8
77,5°	11.0	11.0	7.5	5.5	5.6	6.0	1.7	1.5	1.5	1.7	2.0	2.1	2.2
80,0°	5.1	5.1	4.3	3.5	3.5	4.0	1.2	1.1	1.1	1.2	1.4	1.6	1.7
82,5°	2.9	3.0	2.7	2.3	2.3	2.5	0.7	0.7	0.8	0.9	1.1	1.2	1.4
85,0°	1.4	1.4	1.4	1.4	1.3	1.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1
87,5°	0.9	1.0	1.0	1.0	1.0	0.9	0.3	0.4	0.5	0.6	0.7	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
Table of values for luminous intensities		Maximum luminous intensity

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	0.1	0.1
2,5°	64.2	62.7	61.3	60.0	58.9	58.1	57.4	56.8	56.4	56.1	56.1	1.0	1.1
5,0°	53.1	50.8	48.8	47.1	45.7	44.5	43.6	42.9	42.5	42.1	42.0	2.1	3.2
7,5°	45.3	42.7	40.5	38.8	37.4	36.2	35.5	35.0	34.8	34.7	34.7	3.5	6.7
10,0°	38.5	36.1	34.1	32.6	31.2	30.3	29.8	29.7	29.8	29.8	29.9	5.3	11.9
12,5°	33.8	31.5	29.7	28.0	27.1	26.5	26.3	26.3	26.3	26.0	26.0	7.1	19.0
15,0°	29.3	27.2	25.3	24.1	23.4	23.1	22.9	22.8	22.8	22.8	22.6	9.1	28.2
17,5°	25.0	23.4	21.7	20.6	20.1	20.0	20.0	19.6	19.0	19.1	19.2	11.3	39.4
20,0°	21.4	19.5	18.3	17.7	17.5	17.5	17.1	16.4	16.3	16.2	16.2	13.4	52.9
22,5°	17.4	16.1	15.4	14.8	15.0	14.6	14.1	13.8	13.6	13.5	13.5	15.5	68.3
25,0°	14.5	13.4	12.5	12.4	12.2	11.8	11.5	11.2	11.0	10.9	10.9	17.4	85.7
27,5°	12.2	10.8	10.2	10.3	9.4	9.3	9.1	8.8	8.5	8.4	8.3	19.3	105.0
30,0°	10.4	9.1	9.0	8.2	7.9	7.6	7.4	7.2	6.9	6.7	6.7	21.6	126.6
32,5°	9.0	8.3	8.0	7.1	6.8	6.7	6.5	6.4	6.2	6.1	6.1	24.3	151.0
35,0°	8.2	7.9	6.9	6.6	6.3	6.1	6.0	5.9	5.8	5.8	5.8	27.2	178.2
37,5°	7.6	7.4	6.4	6.1	5.9	5.8	5.7	5.7	5.6	5.6	5.6	29.0	207.2
40,0°	7.1	6.4	6.0	5.6	5.5	5.4	5.4	5.3	5.3	5.3	5.2	30.1	237.2
42,5°	6.7	5.8	5.3	5.1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	32.6	269.8
45,0°	6.0	5.3	4.8	4.7	4.7	4.7	4.7	4.8	4.8	4.7	4.7	38.5	308.3
47,5°	5.2	4.7	4.4	4.3	4.4	4.5	4.5	4.6	4.6	4.6	4.6	47.6	356.0
50,0°	4.6	4.1	4.0	4.1	4.1	4.2	4.4	4.4	4.5	4.5	4.5	62.6	418.5
52,5°	4.1	3.8	3.7	3.8	3.9	4.1	4.3	4.4	4.4	4.5	4.5	82.5	501.1
55,0°	3.8	3.5	3.6	3.7	3.9	4.1	4.3	4.5	4.5	4.6	4.6	101.9	602.9
57,5°	3.5	3.4	3.5	3.7	3.9	4.1	4.4	4.7	4.8	4.8	4.9	112.8	715.8
60,0°	3.4	3.2	3.4	3.6	3.8	4.1	4.5	4.8	5.0	5.1	5.1	105.9	821.7
62,5°	3.3	3.1	3.2	3.4	3.7	4.0	4.4	4.8	5.2	5.3	5.4	80.2	901.9
65,0°	3.2	3.2	3.3	3.5	3.8	4.1	4.5	4.8	5.1	5.3	5.3	51.0	952.9
67,5°	3.3	3.5	3.8	4.1	4.3	4.6	4.8	5.1	5.3	5.4	5.4	25.8	978.7
70,0°	3.4	3.8	4.3	4.6	4.9	5.1	5.2	5.4	5.6	5.6	5.7	11.2	989.9
72,5°	3.4	3.9	4.2	4.5	4.8	5.1	5.3	5.4	5.6	5.7	5.7	4.5	994.4
75,0°	3.1	3.7	4.0	4.3	4.6	4.9	5.1	5.3	5.4	5.5	5.6	2.3	996.6
77,5°	2.5	2.9	3.2	3.5	3.8	4.1	4.3	4.5	4.6	4.7	4.7	1.4	998.0
80,0°	1.9	2.2	2.5	2.7	3.0	3.2	3.4	3.6	3.7	3.8	3.9	0.9	998.8
82,5°	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.0	3.1	3.1	0.6	999.4
85,0°	1.2	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.5	0.4	999.8
87,5°	1.0	1.1	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.0	2.1	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
----------------------------------	--	------------------------------

sitEco

Dimming levels table environmental temperature: 10°C


Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	86950	968.3
95	232	82672	881.7
90	213	78311	807.1
85	196	73901	740.2
80	181	69630	682.0
75	166	65100	623.9
70	153	61027	573.8
65	139	56387	520.3
60	127	52277	474.8
55	114	47693	425.9
50	102	43404	380.7
45	91	39189	339.9
40	80	34895	299.0
35	69	30488	258.5
30	58	25990	217.5
25	48	21830	181.5
20	38	17497	145.4
15	28	13115	109.8
10	18	8628	74.4
5	9	4488	42.8
1	2	1209	17.3

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
90	----	----	----
85	----	----	----
83	185	68735	691.9
80	176	66310	657.2
75	162	62232	603.2
70	148	57990	550.0
65	135	53824	500.6
60	123	49850	455.6
55	111	45685	411.0
50	99	41489	365.9
45	88	37401	325.4
40	77	33194	285.1
35	66	28895	244.5
30	56	24823	208.1
25	46	20701	172.4
20	36	16434	136.8
15	27	12557	105.2
10	17	8112	70.1
5	8	3999	38.9
1	2	1199	17.1

Photometric test report

Family Floodlight FL11	Order number: 5XA779117H01AA EAN: 4058352619858	LP number 59257_23
---------------------------	--	-----------------------

Luminousfluxs table 

Temperature °C	Luminous flux lm	Power consumption W
10.0	86950.0	968.3
25.0	68920.0	694.6