


Photometric test report

Family Floodlight FL11 	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
	Version standard bracket Optic asymmetric distribution PL61 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 118100 lm Power consumption = 947.0 W Luminous efficacy = 124.7 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 924 cd/klm**

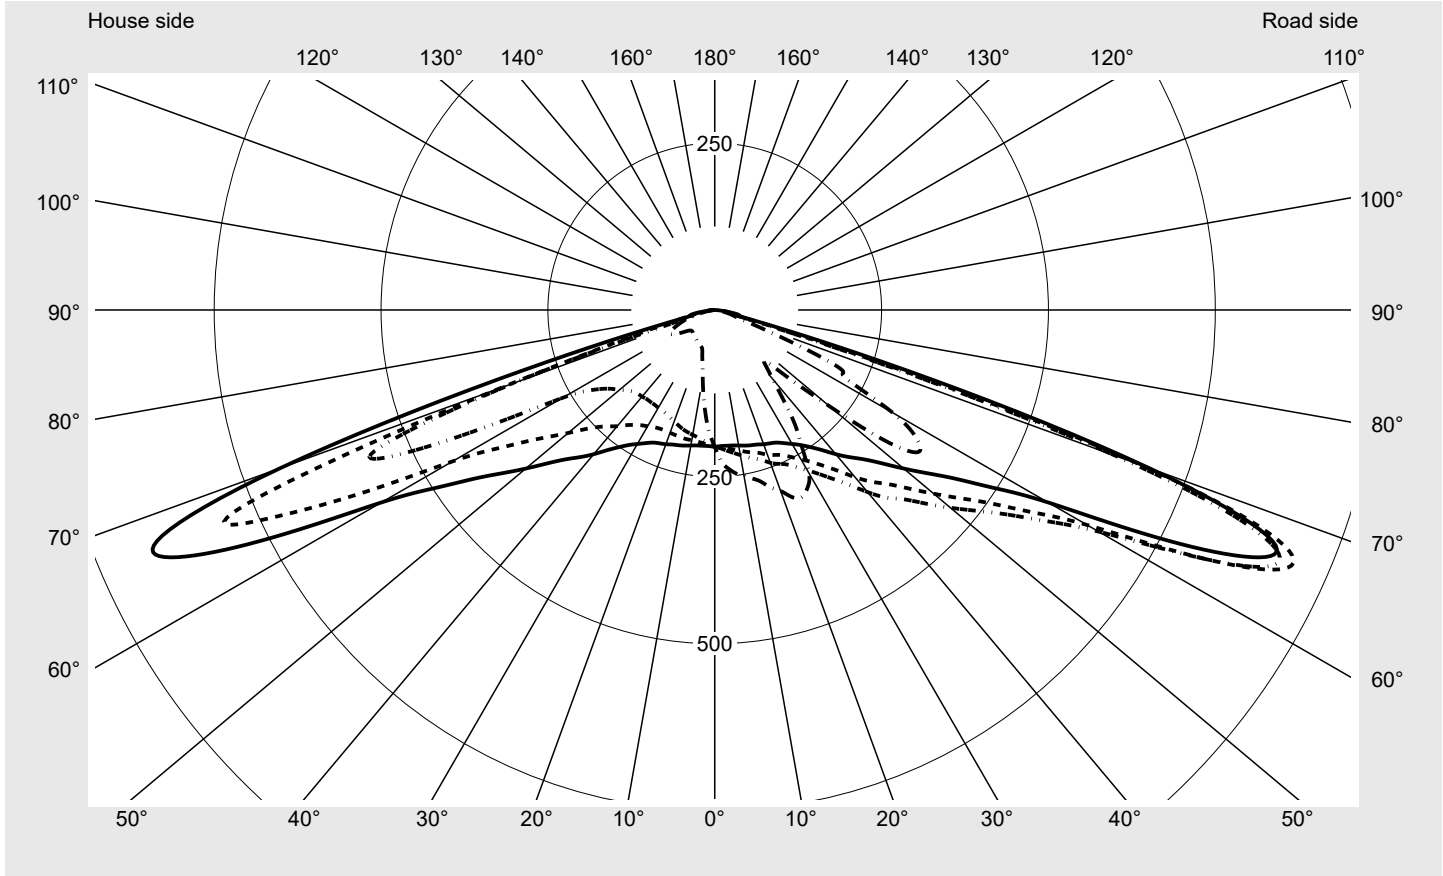

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	692.3
Imax 80°	30.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

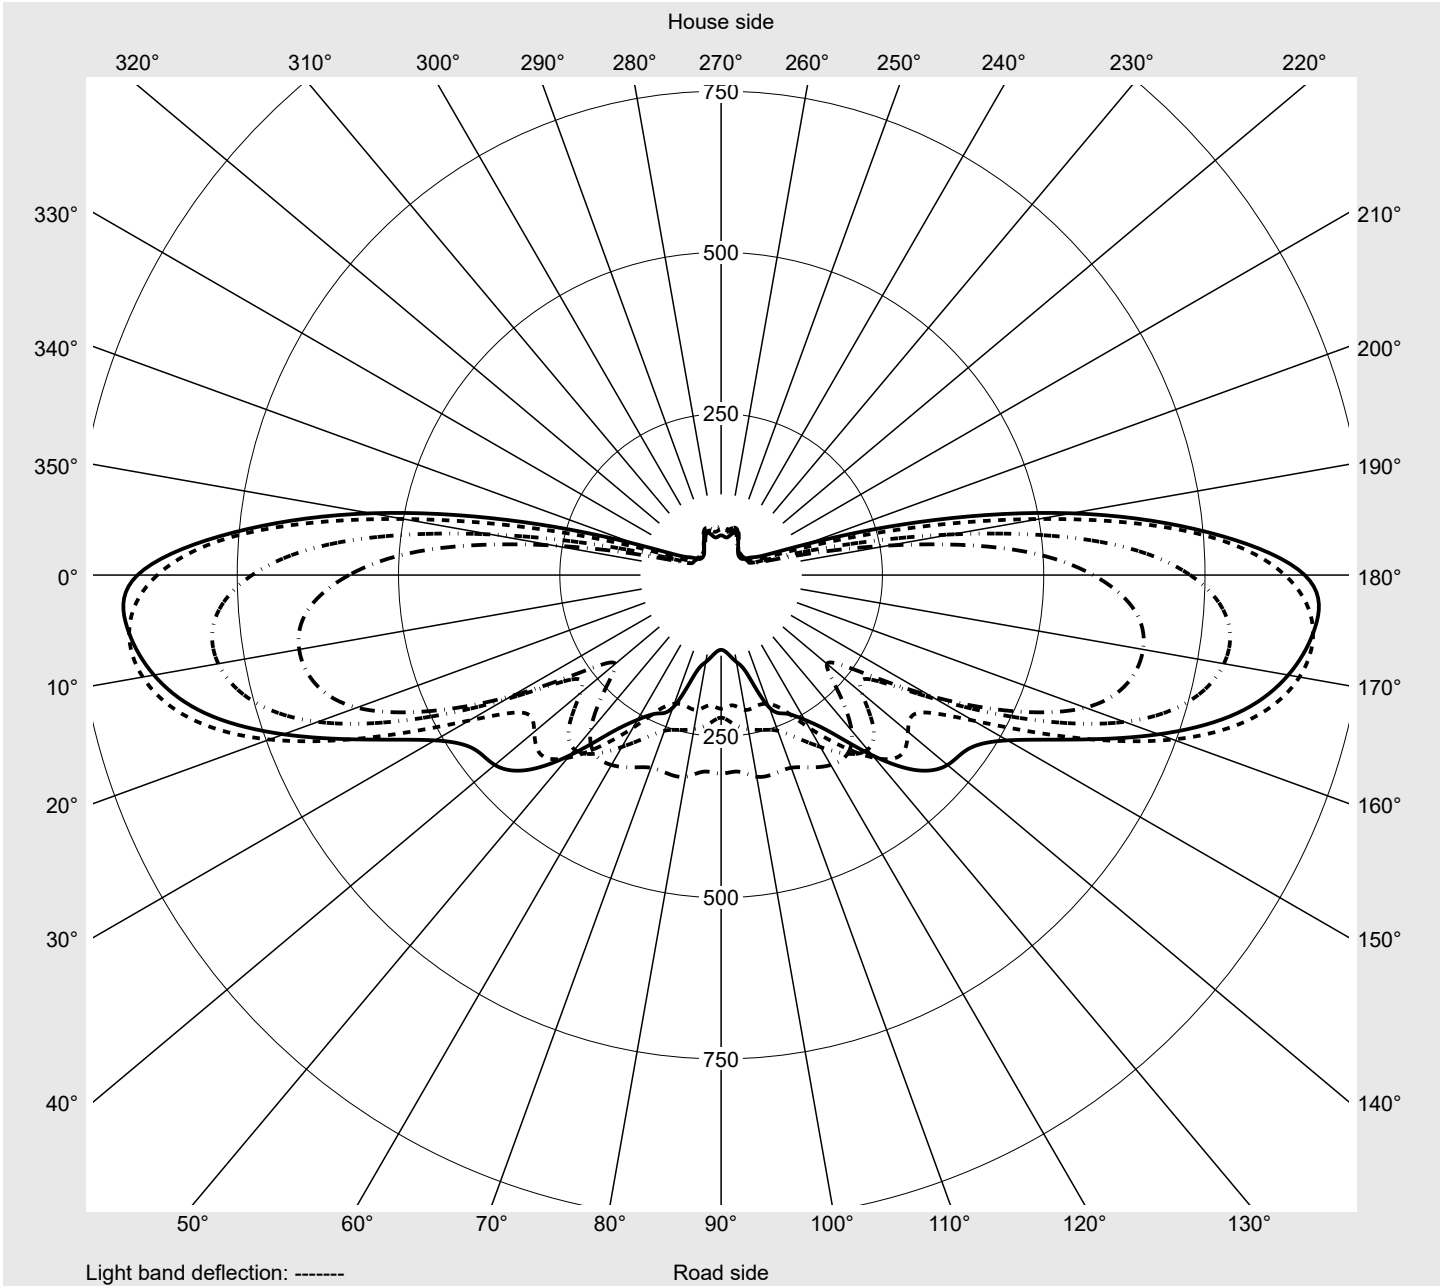

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
---	--	-------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	204.1	205.9	207.6	209.4	211.0	212.6	214.0	215.5	216.8	218.0	219.2	220.1	221.1
5,0°	204.3	208.1	211.7	215.1	218.3	221.3	224.0	226.5	228.6	230.5	232.2	233.5	234.7
7,5°	204.7	210.6	216.0	220.8	225.0	228.8	232.0	234.9	237.1	239.0	240.7	242.0	243.1
10,0°	206.2	213.9	220.8	226.7	231.6	235.7	239.0	241.6	243.4	245.1	246.3	247.5	248.5
12,5°	208.1	217.6	225.8	232.8	238.2	242.2	245.2	247.4	249.0	250.5	251.6	252.7	253.8
15,0°	209.8	221.1	230.6	238.4	244.1	248.1	251.0	253.2	254.7	256.3	257.5	258.9	260.4
17,5°	211.4	224.8	235.6	244.3	250.3	254.1	257.1	259.4	261.3	263.4	265.0	266.9	268.9
20,0°	214.1	230.8	243.7	252.6	257.5	260.6	263.4	265.7	268.2	270.9	273.6	276.5	279.0
22,5°	216.2	235.1	249.5	259.0	263.9	267.5	270.6	273.8	276.7	280.5	284.6	288.8	292.0
25,0°	219.3	240.0	255.4	265.5	271.3	275.6	279.2	282.8	286.7	291.7	297.1	302.3	305.5
27,5°	224.9	248.4	265.4	276.0	282.4	286.8	290.4	294.3	299.5	305.6	311.0	314.3	315.2
30,0°	231.8	258.3	277.3	288.5	295.5	300.5	304.4	308.1	312.6	317.6	320.2	319.2	314.6
32,5°	240.0	270.2	291.6	303.6	311.4	317.0	321.3	325.1	327.0	326.0	322.4	315.3	304.8
35,0°	251.0	285.3	309.0	322.8	331.8	337.8	341.8	343.9	340.7	330.8	318.4	305.6	290.0
37,5°	264.8	303.9	330.0	345.6	355.4	362.0	364.9	361.5	349.7	331.0	310.0	292.0	270.3
40,0°	282.0	327.0	356.1	372.8	383.3	389.8	391.1	379.8	355.4	325.3	296.0	267.5	238.5
42,5°	299.1	349.3	381.5	400.1	410.6	416.3	412.2	389.5	350.3	306.4	265.4	228.3	197.1
45,0°	316.6	369.4	401.3	419.1	428.3	430.6	416.6	381.3	333.5	281.9	233.9	194.2	165.1
47,5°	340.2	396.4	429.6	445.6	453.0	449.8	423.6	375.7	317.5	257.6	204.8	168.1	148.1
50,0°	369.6	428.3	461.1	474.4	477.4	463.0	422.5	363.0	295.4	230.2	181.3	159.0	162.0
52,5°	401.9	463.3	494.2	504.2	500.7	470.9	414.9	342.7	265.8	202.0	174.5	186.1	216.1
55,0°	441.1	505.3	534.1	538.4	524.1	476.3	403.0	316.4	233.2	186.7	198.5	241.5	284.7
57,5°	496.4	564.0	588.7	584.0	554.2	482.5	388.1	284.4	206.9	201.3	252.0	305.4	339.5
60,0°	576.7	644.3	664.1	651.1	600.9	499.1	374.5	259.3	214.2	257.9	314.6	339.9	339.9
62,5°	727.1	787.6	791.4	752.3	665.5	530.0	385.4	281.8	285.1	333.6	353.2	337.8	307.7
65,0°	873.9	920.6	910.3	854.1	745.2	594.1	451.0	372.6	378.1	394.2	369.9	322.8	273.7
67,5°	904.6	924.4	892.6	827.7	721.6	603.3	512.4	469.0	457.9	427.6	364.8	298.4	259.0
70,0°	692.3	683.4	640.8	616.3	574.3	530.6	499.4	482.0	461.6	395.0	327.5	275.1	237.3
72,5°	304.0	238.3	203.0	260.5	362.4	384.3	380.7	369.4	325.3	266.7	227.4	180.7	147.1
75,0°	64.8	47.4	44.1	55.4	144.8	194.0	196.1	169.5	92.1	70.4	94.1	71.8	61.3
77,5°	36.5	33.7	33.3	31.6	45.4	59.9	56.3	31.9	26.4	27.1	33.5	31.7	28.1
80,0°	30.4	27.3	26.5	25.1	23.1	23.0	20.7	17.5	16.7	16.2	16.3	19.2	19.4
82,5°	16.5	15.6	16.7	16.1	13.7	12.7	11.6	10.0	9.6	9.3	8.7	9.1	10.2
85,0°	6.6	6.6	7.3	7.3	6.4	5.7	5.0	4.6	4.2	3.8	3.5	3.2	3.1
87,5°	2.2	2.3	2.2	2.2	2.0	1.8	1.6	1.4	1.3	1.1	1.1	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	222.0	222.8	223.4	224.0	224.3	227.3	202.3	200.6	198.8	197.0	195.2	193.6	192.1
5,0°	235.9	236.9	237.7	238.2	238.6	238.9	200.4	196.6	192.6	188.6	184.7	181.0	177.5
7,5°	244.1	244.8	245.4	245.9	246.3	247.2	198.9	192.9	186.6	180.5	174.3	168.5	162.8
10,0°	249.5	250.1	250.7	251.1	251.6	252.1	198.3	190.0	181.6	173.1	164.7	156.5	148.6
12,5°	254.9	255.9	256.5	257.0	257.6	258.5	198.0	187.5	176.9	166.2	155.4	144.9	134.5
15,0°	261.9	263.3	264.4	265.2	266.0	266.2	197.5	184.7	171.8	159.0	146.2	133.6	121.7
17,5°	271.0	273.0	274.7	275.9	276.8	278.8	196.5	181.1	165.7	150.7	135.6	121.7	109.2
20,0°	281.5	283.8	286.0	287.6	288.8	288.5	195.8	177.8	159.7	141.9	125.1	110.6	98.7
22,5°	294.3	296.3	298.4	300.3	301.5	303.6	195.4	174.3	153.3	132.9	114.7	100.2	87.9
25,0°	306.5	306.1	306.6	307.9	308.7	309.1	196.0	171.7	147.3	124.8	105.3	89.2	76.0
27,5°	312.0	306.2	303.2	303.4	303.1	300.7	197.9	169.9	141.7	116.5	94.3	76.2	68.3
30,0°	305.5	293.7	287.1	285.4	282.4	282.6	201.2	169.1	137.0	108.7	81.8	68.5	65.3
32,5°	289.9	273.0	262.8	257.1	249.5	243.0	204.8	168.2	131.9	98.7	72.2	65.3	63.6
35,0°	268.4	245.7	231.9	220.0	208.5	209.7	210.4	168.0	126.5	87.6	66.8	63.4	62.1
37,5°	242.5	214.8	198.3	180.4	168.5	167.6	217.5	168.0	118.2	76.7	63.6	61.4	60.4
40,0°	206.1	177.7	162.1	141.9	133.3	135.1	227.3	169.5	107.3	68.2	60.9	59.3	58.5
42,5°	170.8	149.5	133.4	119.3	114.5	113.1	236.5	170.2	97.2	63.0	58.3	57.1	56.4
45,0°	145.3	128.7	118.9	111.2	108.8	108.8	248.1	172.9	92.0	60.1	56.3	55.1	54.2
47,5°	142.0	138.1	139.0	141.9	143.6	153.7	264.5	178.3	89.3	58.1	54.7	53.4	52.4
50,0°	178.8	195.0	206.9	220.9	226.9	224.5	286.8	186.2	88.9	56.5	53.1	51.7	50.8
52,5°	247.7	273.0	293.1	311.6	317.7	321.5	311.7	194.2	88.9	55.1	51.5	50.2	49.2
55,0°	320.9	344.4	359.9	372.8	371.0	371.4	343.0	206.1	91.2	54.2	50.0	48.7	47.8
57,5°	355.1	358.8	363.7	367.9	359.6	358.6	386.1	224.8	96.0	53.6	48.6	47.1	46.5
60,0°	328.9	317.8	318.6	317.3	305.8	307.7	453.8	263.3	108.8	54.4	47.4	46.0	45.4
62,5°	278.5	256.8	248.5	242.4	232.3	221.1	590.3	362.7	154.6	61.6	47.4	45.6	44.5
65,0°	231.6	212.4	210.3	212.2	202.7	207.2	740.4	500.4	255.9	94.5	53.9	47.0	43.6
67,5°	236.9	218.5	160.4	136.8	122.6	115.9	758.3	551.2	317.3	138.6	70.9	54.8	43.8
70,0°	212.7	183.9	65.2	48.9	46.2	50.5	337.4	322.6	227.0	124.9	74.3	60.0	45.2
72,5°	128.8	109.5	39.2	34.3	33.8	31.2	126.8	73.2	68.7	66.6	49.6	46.1	37.0
75,0°	60.8	58.1	29.6	25.8	25.1	24.1	57.8	34.5	34.5	35.0	31.4	29.8	27.8
77,5°	27.9	27.5	20.6	18.4	17.7	15.6	32.8	27.6	25.4	24.2	22.8	21.4	20.4
80,0°	15.8	14.4	12.7	11.6	10.7	10.4	27.2	20.6	17.6	16.6	16.8	14.6	13.9
82,5°	8.2	7.7	6.9	6.4	5.9	5.7	15.1	12.9	10.8	10.2	12.6	8.6	8.3
85,0°	2.8	2.6	2.5	2.4	2.4	2.5	6.7	5.9	5.4	4.9	5.2	4.3	4.0
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	2.2	2.1	2.1	2.0	1.9	1.7	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	0.3	0.3
2,5°	190.7	189.5	188.2	187.3	186.4	185.7	185.3	184.9	184.7	184.2	184.4	2.4	2.7
5,0°	174.2	171.1	168.2	165.7	163.5	161.5	160.0	158.7	158.0	157.2	157.1	4.8	7.5
7,5°	157.4	152.4	147.7	143.5	139.8	136.6	134.0	132.1	130.6	129.5	129.2	7.0	14.6
10,0°	141.0	133.8	127.2	121.6	116.8	112.7	109.5	107.0	105.2	104.0	103.6	9.1	23.6
12,5°	124.9	116.3	108.4	101.9	96.7	92.6	89.5	87.2	85.7	84.7	84.4	11.1	34.7
15,0°	111.0	101.7	94.1	87.9	83.1	79.5	76.8	74.9	73.4	72.5	72.2	13.1	47.8
17,5°	98.8	89.9	81.4	74.6	69.9	66.9	65.0	63.8	62.9	62.3	62.1	15.1	62.9
20,0°	88.4	77.5	70.9	67.1	64.5	62.6	61.2	60.2	59.5	59.0	58.8	17.3	80.2
22,5°	76.3	69.9	66.6	64.8	63.1	61.6	60.2	59.1	58.3	57.7	57.4	19.6	99.8
25,0°	69.3	66.4	65.2	64.1	62.8	61.4	60.0	58.7	57.7	56.9	56.6	22.0	121.8
27,5°	65.8	64.8	64.3	63.8	62.9	61.7	60.1	58.5	57.1	56.0	55.5	24.3	146.0
30,0°	64.3	63.9	63.8	63.7	63.1	61.8	59.7	57.6	55.7	54.4	53.7	26.3	172.3
32,5°	63.0	63.0	63.3	63.3	62.5	60.8	58.6	56.5	54.5	52.9	52.1	28.1	200.4
35,0°	61.7	61.9	62.1	61.9	61.1	59.8	58.0	56.0	54.2	52.6	51.7	29.6	230.1
37,5°	60.1	60.2	60.2	60.2	59.8	58.9	57.1	55.0	53.0	51.3	50.3	31.0	261.1
40,0°	58.2	58.0	58.2	58.3	58.3	57.1	55.3	53.4	51.5	49.8	48.8	32.2	293.3
42,5°	55.8	55.8	56.0	56.3	55.9	54.8	53.5	52.1	50.5	48.8	47.7	33.2	326.5
45,0°	53.7	53.6	53.8	53.6	53.2	52.8	52.1	51.0	49.6	47.8	46.7	34.0	360.6
47,5°	51.9	51.7	51.5	51.0	51.2	51.2	50.9	50.5	49.3	47.6	46.6	36.3	396.9
50,0°	50.2	49.9	49.1	49.1	49.6	49.9	50.6	50.8	50.1	48.8	47.9	40.4	437.3
52,5°	48.7	48.0	47.6	47.7	48.4	49.9	51.9	53.2	52.9	52.1	51.7	45.7	483.0
55,0°	47.1	46.4	46.5	46.8	48.1	51.1	55.5	58.0	57.9	58.0	58.3	51.3	534.3
57,5°	45.5	45.2	45.8	46.5	48.8	54.1	61.2	64.5	63.9	64.7	65.9	55.9	590.2
60,0°	44.1	44.2	44.9	46.4	50.2	58.1	68.0	71.4	69.3	70.6	72.8	60.0	650.3
62,5°	43.1	43.1	44.1	46.7	52.3	62.6	73.9	76.1	72.0	73.2	75.8	66.5	716.7
65,0°	42.0	41.8	43.2	46.8	53.8	64.8	75.3	75.0	68.6	68.4	70.7	75.8	792.5
67,5°	40.0	39.9	41.4	45.6	52.8	62.1	68.9	66.5	59.7	59.6	61.6	78.1	870.6
70,0°	37.0	36.6	38.1	41.7	48.1	56.1	61.3	58.0	51.5	50.7	52.3	62.2	932.8
72,5°	31.9	31.2	32.8	36.8	42.3	48.1	50.6	46.7	40.8	39.7	41.0	35.6	968.4
75,0°	25.9	25.7	27.4	30.7	34.5	36.9	36.2	32.6	28.4	27.5	28.4	15.4	983.8
77,5°	19.9	19.9	20.7	22.3	24.1	25.7	25.4	22.7	20.1	19.4	20.0	7.4	991.2
80,0°	13.4	13.2	13.7	14.6	14.9	15.2	14.8	13.1	11.7	11.3	11.4	4.7	995.9
82,5°	7.9	7.6	7.7	7.6	7.7	7.7	7.1	6.1	5.5	5.4	5.4	2.6	998.5
85,0°	3.6	3.4	3.1	2.9	2.6	2.4	2.2	2.2	2.1	2.1	2.0	1.1	999.6
87,5°	1.5	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.1	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779416C01AA
EAN: 4058352597286

LP number
59236_22

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	118100	947.0
95	232	112193	862.3
90	213	106122	789.3
85	197	100505	728.6
80	182	94657	671.0
75	167	88464	613.9
70	153	82501	561.4
65	140	76687	513.0
60	127	70694	464.7
55	115	64960	420.5
50	103	59178	376.5
45	91	52960	332.7
40	80	47161	292.9
35	69	41214	253.4
30	59	35687	216.7
25	48	29490	178.0
20	38	23646	142.7
15	28	17746	107.8
10	18	11674	73.1
5	9	6077	42.3
1	2	1641	17.1

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
93	219	104338	806.9
90	209	101242	768.5
85	193	95896	707.8
80	177	90071	647.0
75	163	84567	594.0
70	149	78784	542.0
65	136	73230	493.8
60	123	67396	446.0
55	111	61757	401.9
50	99	56095	358.4
45	88	50575	318.8
40	77	44877	279.3
35	67	39620	242.9
30	56	33579	204.0
25	46	27976	168.9
20	37	22801	137.7
15	27	16982	103.2
10	17	10982	68.9
5	8	5410	38.3
1	2	1629	16.8

Photometric test report

Family Floodlight FL11	Order number: 5XA779416C01AA EAN: 4058352597286	LP number 59236_22
---	--	-------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	118100.0	947.0
25.0	104540.0	809.5