

Photometric test report

Family
Licross® Spot 31

Order number: 51SL32DA43B
EAN: 4058352864913

LP number
59381_22



Version reflector, cover, polycarbonate, narrow distribution, luminaire housing, aluminium, black

Lamps LED 4000 K | CRI ≥ 90

Controlgear ECG-DALI

Setting factory setting: DIP-Step=7

Rated values Net luminous flux = 3650 lm
Power consumption = 28.6 W
Luminous efficacy = 127.6 lm/W


serial
documentation
12.07.2023

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 4501 cd/klm

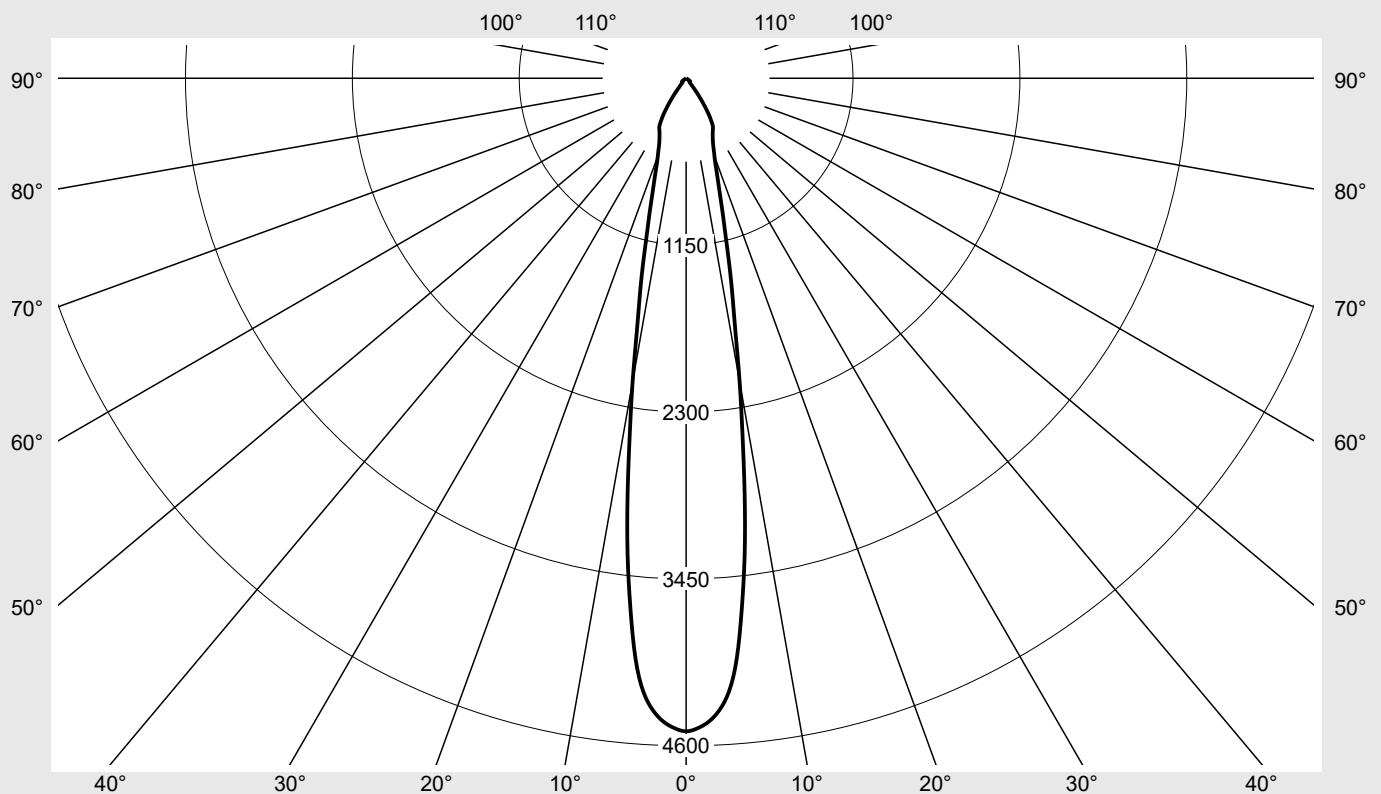

Classifications

DIN 5040 A 7 0
CIE N1=93 N2=97 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Spot 31	Order number: 51SL32DA43B EAN: 4058352864913	LP number 59381_22
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	4500.5	1.1	1.1
1°	4480.3	8.6	9.7
2°	4437.5	17.0	26.6
3°	4362.0	25.0	51.7
4°	4236.1	32.4	84.1
5°	4010.1	38.3	122.4
6°	3672.5	42.1	164.5
7°	3309.8	44.2	208.7
8°	2898.6	44.2	253.0
9°	2482.5	42.6	295.6
10°	2122.6	40.4	336.0
11°	1782.7	37.3	373.3
12°	1538.7	35.1	408.4
13°	1327.4	32.7	441.1
14°	1130.4	30.0	471.1
15°	985.0	28.0	499.1
16°	859.9	26.0	525.0
17°	761.9	24.4	549.5
18°	683.9	23.2	572.6
19°	616.9	22.0	594.7
20°	570.3	21.4	616.1
21°	532.3	20.9	637.0
22°	498.2	20.5	657.4
23°	472.4	20.2	677.7
24°	451.2	20.1	697.8
25°	433.6	20.1	717.9
26°	418.4	20.1	738.0
27°	405.2	20.2	758.2
28°	393.9	20.3	778.5
29°	380.9	20.3	798.7
30°	356.4	19.5	818.3
31°	326.4	18.4	836.7
32°	294.9	17.1	853.8
33°	256.7	15.3	869.2
34°	220.2	13.5	882.7
35°	180.4	11.3	894.0
36°	146.1	9.4	903.4
37°	111.1	7.3	910.8
38°	79.1	5.3	916.1
39°	56.1	3.9	920.0
40°	40.9	2.9	922.8
41°	37.1	2.7	925.5
42°	35.5	2.6	928.1
43°	33.6	2.5	930.6
44°	33.1	2.5	933.2
45°	33.1	2.6	935.7
46°	32.9	2.6	938.3

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	33.1	2.7	941.0
48°	33.6	2.7	943.7
49°	34.5	2.9	946.6
50°	35.6	3.0	949.6
51°	36.2	3.1	952.6
52°	35.7	3.1	955.7
53°	33.7	2.9	958.7
54°	30.9	2.7	961.4
55°	27.6	2.5	963.9
56°	23.6	2.1	966.1
57°	21.0	1.9	968.0
58°	19.1	1.8	969.8
59°	17.3	1.6	971.4
60°	16.3	1.5	972.9
61°	15.8	1.5	974.5
62°	15.5	1.5	976.0
63°	15.1	1.5	977.4
64°	14.4	1.4	978.9
65°	14.1	1.4	980.3
66°	13.7	1.4	981.6
67°	13.0	1.3	982.9
68°	12.9	1.3	984.3
69°	12.5	1.3	985.5
70°	12.0	1.2	986.8
71°	11.4	1.2	988.0
72°	11.1	1.2	989.1
73°	10.6	1.1	990.2
74°	10.1	1.1	991.3
75°	9.5	1.0	992.3
76°	8.7	0.9	993.2
77°	7.7	0.8	994.0
78°	6.8	0.7	994.8
79°	6.5	0.7	995.5
80°	6.1	0.7	996.1
81°	5.4	0.6	996.7
82°	5.2	0.6	997.3
83°	4.8	0.5	997.8
84°	4.1	0.5	998.2
85°	3.8	0.4	998.7
86°	3.1	0.3	999.0
87°	3.1	0.3	999.3
88°	2.5	0.3	999.6
89°	2.2	0.2	999.9
90°	2.5	0.3	1000.1

Photometric test report

Family Licross® Spot 31	Order number: 51SL32DA43B EAN: 4058352864913	LP number 59381_22
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.0	22.0	21.4	22.4	22.7	21.0	22.0	21.4	22.4	22.7
	3H	21.5	22.5	21.9	22.8	23.2	21.5	22.5	21.9	22.8	23.2
	4H	21.9	22.8	22.3	23.1	23.5	21.9	22.8	22.3	23.1	23.5
	6H	22.2	23.0	22.6	23.4	23.7	22.2	23.0	22.6	23.4	23.7
	8H	22.5	23.1	22.9	23.5	23.9	22.5	23.1	22.9	23.5	23.9
	12H	22.6	23.2	23.0	23.6	24.0	22.6	23.2	23.0	23.6	24.0
4H	2H	21.1	21.9	21.5	22.3	22.7	21.1	21.9	21.5	22.3	22.7
	3H	21.9	22.6	22.3	22.9	23.4	21.9	22.6	22.3	22.9	23.4
	4H	22.4	23.0	22.8	23.4	23.9	22.4	23.0	22.8	23.4	23.9
	6H	22.8	23.3	23.2	23.8	24.2	22.8	23.3	23.2	23.8	24.2
	8H	23.0	23.5	23.5	24.0	24.4	23.0	23.5	23.5	24.0	24.4
	12H	23.2	23.7	23.7	24.1	24.6	23.2	23.7	23.7	24.1	24.6
8H	4H	22.5	23.0	23.0	23.5	23.9	22.5	23.0	23.0	23.5	23.9
	6H	23.1	23.5	23.6	24.0	24.5	23.1	23.5	23.6	24.0	24.5
	8H	23.4	23.8	23.9	24.2	24.8	23.4	23.8	23.9	24.2	24.8
	12H	23.7	24.0	24.2	24.5	25.1	23.7	24.0	24.2	24.5	25.1
12H	4H	22.5	22.9	23.0	23.4	23.9	22.5	22.9	23.0	23.4	23.9
	6H	23.1	23.5	23.6	24.0	24.5	23.1	23.5	23.6	24.0	24.5
	8H	23.5	23.8	24.0	24.3	24.8	23.5	23.8	24.0	24.3	24.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	34836.1
50°	41285.2
55°	35887.5
60°	24300.7
65°	24845.7
70°	26074.1
75°	27292.0
80°	25965.3
85°	32816.9

Photometric test report


Family
Licross® Spot 31

Order number: 51SL32DA43B
EAN: 4058352864913

LP number
59381_22

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

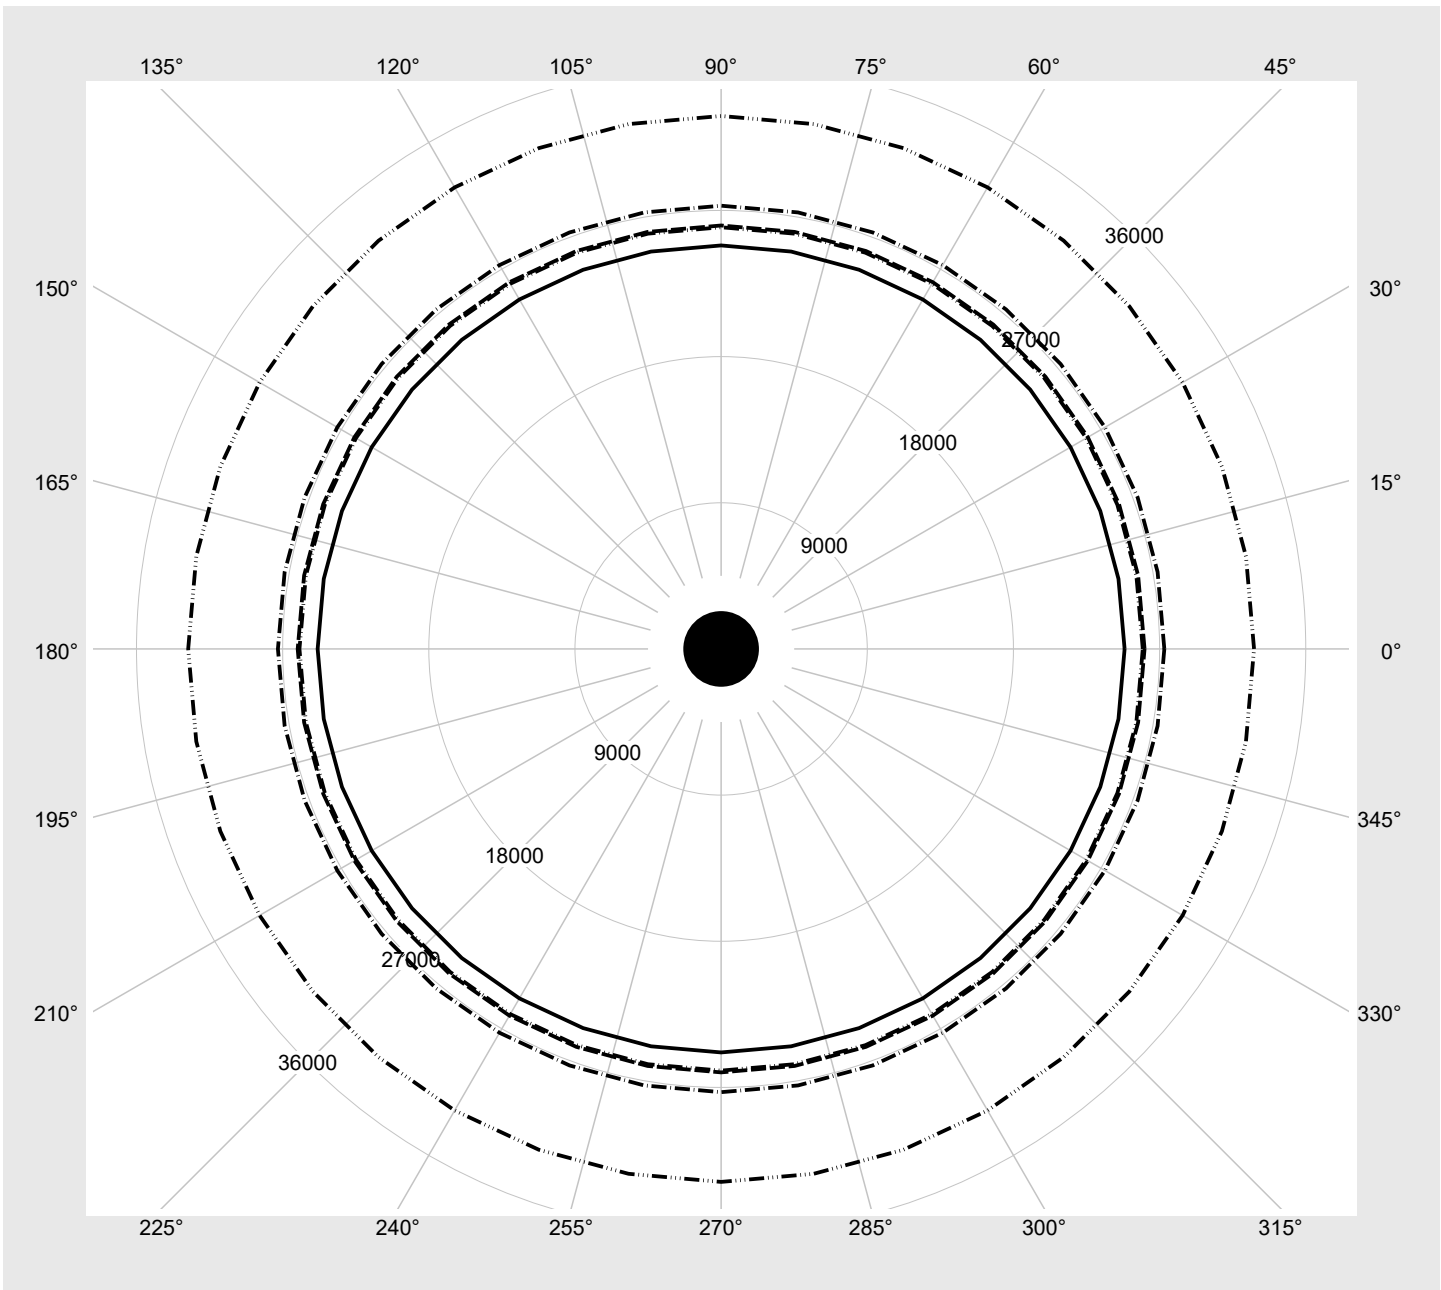

Photometric test report

Family Licross® Spot 31	Order number: 51SL32DA43B EAN: 4058352864913	LP number 59381_22
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
7	ON	ON	ON	3650	28.6
6	OFF	ON	ON	3430	26.5
5	ON	OFF	ON	3190	24.4
4	OFF	OFF	ON	2960	22.4
3	ON	ON	OFF	2710	20.4
2	OFF	ON	OFF	2440	18.4
1	ON	OFF	OFF	2190	16.3
0	OFF	OFF	OFF	1840	14.4