


Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
	Version standard bracket Optic asymmetric distribution PL61 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 102580 lm Power consumption = 747.5 W Luminous efficacy = 137.2 lm/W	serial documentation 21.07.2023



Luminous intensity in cd/klm C180-0 C185-5 C190-10 C270-90 **Imax: 924 cd/klm**

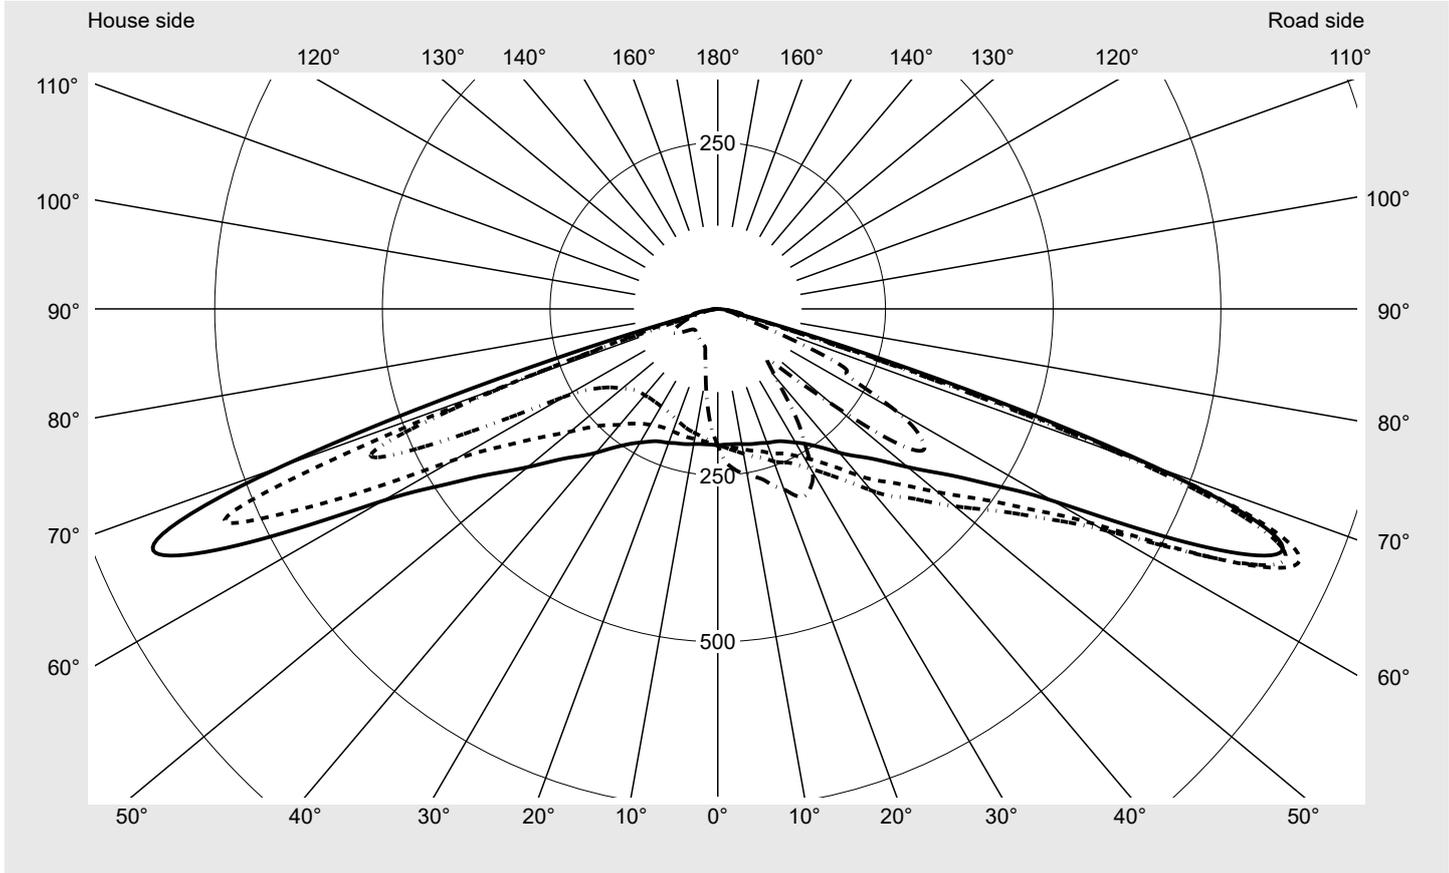

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	692.3
Imax 80°	30.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
----------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

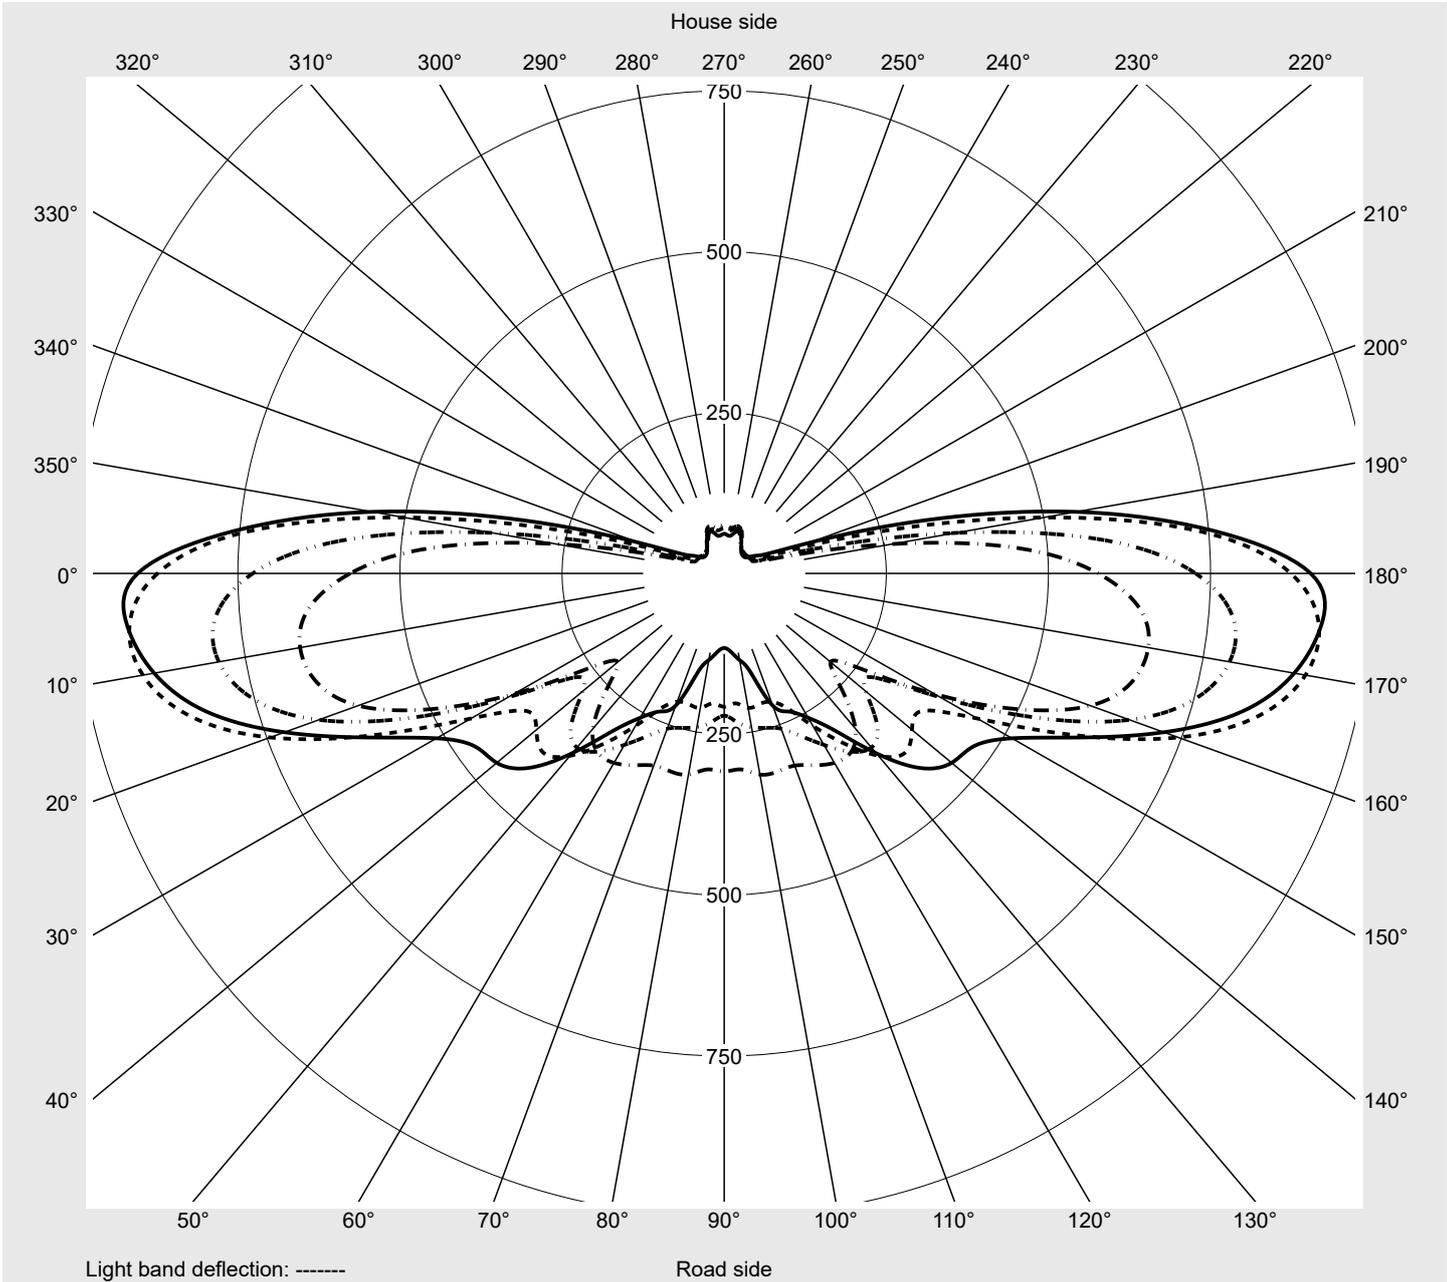

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	204.1	205.9	207.6	209.4	211.0	212.6	214.0	215.5	216.8	218.0	219.2	220.1	221.1
5,0°	204.3	208.1	211.7	215.1	218.3	221.3	224.0	226.5	228.6	230.5	232.2	233.5	234.7
7,5°	204.7	210.6	216.0	220.8	225.0	228.8	232.0	234.9	237.1	239.0	240.7	242.0	243.1
10,0°	206.2	213.9	220.8	226.7	231.6	235.7	239.0	241.6	243.4	245.1	246.3	247.5	248.5
12,5°	208.1	217.6	225.8	232.8	238.2	242.2	245.2	247.4	249.0	250.5	251.6	252.7	253.8
15,0°	209.8	221.1	230.6	238.4	244.1	248.1	251.0	253.2	254.7	256.3	257.5	258.9	260.4
17,5°	211.4	224.8	235.6	244.3	250.3	254.1	257.1	259.4	261.3	263.4	265.0	266.9	268.9
20,0°	214.1	230.8	243.7	252.6	257.5	260.6	263.4	265.7	268.2	270.9	273.6	276.5	279.0
22,5°	216.2	235.1	249.5	259.0	263.9	267.5	270.6	273.8	276.7	280.5	284.6	288.8	292.0
25,0°	219.3	240.0	255.4	265.5	271.3	275.6	279.2	282.8	286.7	291.7	297.1	302.3	305.5
27,5°	224.9	248.4	265.4	276.0	282.4	286.8	290.4	294.3	299.5	305.6	311.0	314.3	315.2
30,0°	231.8	258.3	277.3	288.5	295.5	300.5	304.4	308.1	312.6	317.6	320.2	319.2	314.6
32,5°	240.0	270.2	291.6	303.6	311.4	317.0	321.3	325.1	327.0	326.0	322.4	315.3	304.8
35,0°	251.0	285.3	309.0	322.8	331.8	337.8	341.8	343.9	340.7	330.8	318.4	305.6	290.0
37,5°	264.8	303.9	330.0	345.6	355.4	362.0	364.9	361.5	349.7	331.0	310.0	292.0	270.3
40,0°	282.0	327.0	356.1	372.8	383.3	389.8	391.1	379.8	355.4	325.3	296.0	267.5	238.5
42,5°	299.1	349.3	381.5	400.1	410.6	416.3	412.2	389.5	350.3	306.4	265.4	228.3	197.1
45,0°	316.6	369.4	401.3	419.1	428.3	430.6	416.6	381.3	333.5	281.9	233.9	194.2	165.1
47,5°	340.2	396.4	429.6	445.6	453.0	449.8	423.6	375.7	317.5	257.6	204.8	168.1	148.1
50,0°	369.6	428.3	461.1	474.4	477.4	463.0	422.5	363.0	295.4	230.2	181.3	159.0	162.0
52,5°	401.9	463.3	494.2	504.2	500.7	470.9	414.9	342.7	265.8	202.0	174.5	186.1	216.1
55,0°	441.1	505.3	534.1	538.4	524.1	476.3	403.0	316.4	233.2	186.7	198.5	241.5	284.7
57,5°	496.4	564.0	588.7	584.0	554.2	482.5	388.1	284.4	206.9	201.3	252.0	305.4	339.5
60,0°	576.7	644.3	664.1	651.1	600.9	499.1	374.5	259.3	214.2	257.9	314.6	339.9	339.9
62,5°	727.1	787.6	791.4	752.3	665.5	530.0	385.4	281.8	285.1	333.6	353.2	337.8	307.7
65,0°	873.9	920.6	910.3	854.1	745.2	594.1	451.0	372.6	378.1	394.2	369.9	322.8	273.7
67,5°	904.6	924.4	892.6	827.7	721.6	603.3	512.4	469.0	457.9	427.6	364.8	298.4	259.0
70,0°	692.3	683.4	640.8	616.3	574.3	530.6	499.4	482.0	461.6	395.0	327.5	275.1	237.3
72,5°	304.0	238.3	203.0	260.5	362.4	384.3	380.7	369.4	325.3	266.7	227.4	180.7	147.1
75,0°	64.8	47.4	44.1	55.4	144.8	194.0	196.1	169.5	92.1	70.4	94.1	71.8	61.3
77,5°	36.5	33.7	33.3	31.6	45.4	59.9	56.3	31.9	26.4	27.1	33.5	31.7	28.1
80,0°	30.4	27.3	26.5	25.1	23.1	23.0	20.7	17.5	16.7	16.2	16.3	19.2	19.4
82,5°	16.5	15.6	16.7	16.1	13.7	12.7	11.6	10.0	9.6	9.3	8.7	9.1	10.2
85,0°	6.6	6.6	7.3	7.3	6.4	5.7	5.0	4.6	4.2	3.8	3.5	3.2	3.1
87,5°	2.2	2.3	2.2	2.2	2.0	1.8	1.6	1.4	1.3	1.1	1.1	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8
2,5°	222.0	222.8	223.4	224.0	224.3	227.3	202.3	200.6	198.8	197.0	195.2	193.6	192.1
5,0°	235.9	236.9	237.7	238.2	238.6	238.9	200.4	196.6	192.6	188.6	184.7	181.0	177.5
7,5°	244.1	244.8	245.4	245.9	246.3	247.2	198.9	192.9	186.6	180.5	174.3	168.5	162.8
10,0°	249.5	250.1	250.7	251.1	251.6	252.1	198.3	190.0	181.6	173.1	164.7	156.5	148.6
12,5°	254.9	255.9	256.5	257.0	257.6	258.5	198.0	187.5	176.9	166.2	155.4	144.9	134.5
15,0°	261.9	263.3	264.4	265.2	266.0	266.2	197.5	184.7	171.8	159.0	146.2	133.6	121.7
17,5°	271.0	273.0	274.7	275.9	276.8	278.8	196.5	181.1	165.7	150.7	135.6	121.7	109.2
20,0°	281.5	283.8	286.0	287.6	288.8	288.5	195.8	177.8	159.7	141.9	125.1	110.6	98.7
22,5°	294.3	296.3	298.4	300.3	301.5	303.6	195.4	174.3	153.3	132.9	114.7	100.2	87.9
25,0°	306.5	306.1	306.6	307.9	308.7	309.1	196.0	171.7	147.3	124.8	105.3	89.2	76.0
27,5°	312.0	306.2	303.2	303.4	303.1	300.7	197.9	169.9	141.7	116.5	94.3	76.2	68.3
30,0°	305.5	293.7	287.1	285.4	282.4	282.6	201.2	169.1	137.0	108.7	81.8	68.5	65.3
32,5°	289.9	273.0	262.8	257.1	249.5	243.0	204.8	168.2	131.9	98.7	72.2	65.3	63.6
35,0°	268.4	245.7	231.9	220.0	208.5	209.7	210.4	168.0	126.5	87.6	66.8	63.4	62.1
37,5°	242.5	214.8	198.3	180.4	168.5	167.6	217.5	168.0	118.2	76.7	63.6	61.4	60.4
40,0°	206.1	177.7	162.1	141.9	133.3	135.1	227.3	169.5	107.3	68.2	60.9	59.3	58.5
42,5°	170.8	149.5	133.4	119.3	114.5	113.1	236.5	170.2	97.2	63.0	58.3	57.1	56.4
45,0°	145.3	128.7	118.9	111.2	108.8	108.8	248.1	172.9	92.0	60.1	56.3	55.1	54.2
47,5°	142.0	138.1	139.0	141.9	143.6	153.7	264.5	178.3	89.3	58.1	54.7	53.4	52.4
50,0°	178.8	195.0	206.9	220.9	226.9	224.5	286.8	186.2	88.9	56.5	53.1	51.7	50.8
52,5°	247.7	273.0	293.1	311.6	317.7	321.5	311.7	194.2	88.9	55.1	51.5	50.2	49.2
55,0°	320.9	344.4	359.9	372.8	371.0	371.4	343.0	206.1	91.2	54.2	50.0	48.7	47.8
57,5°	355.1	358.8	363.7	367.9	359.6	358.6	386.1	224.8	96.0	53.6	48.6	47.1	46.5
60,0°	328.9	317.8	318.6	317.3	305.8	307.7	453.8	263.3	108.8	54.4	47.4	46.0	45.4
62,5°	278.5	256.8	248.5	242.4	232.3	221.1	590.3	362.7	154.6	61.6	47.4	45.6	44.5
65,0°	231.6	212.4	210.3	212.2	202.7	207.2	740.4	500.4	255.9	94.5	53.9	47.0	43.6
67,5°	236.9	218.5	160.4	136.8	122.6	115.9	758.3	551.2	317.3	138.6	70.9	54.8	43.8
70,0°	212.7	183.9	65.2	48.9	46.2	50.5	337.4	322.6	227.0	124.9	74.3	60.0	45.2
72,5°	128.8	109.5	39.2	34.3	33.8	31.2	126.8	73.2	68.7	66.6	49.6	46.1	37.0
75,0°	60.8	58.1	29.6	25.8	25.1	24.1	57.8	34.5	34.5	35.0	31.4	29.8	27.8
77,5°	27.9	27.5	20.6	18.4	17.7	15.6	32.8	27.6	25.4	24.2	22.8	21.4	20.4
80,0°	15.8	14.4	12.7	11.6	10.7	10.4	27.2	20.6	17.6	16.6	16.8	14.6	13.9
82,5°	8.2	7.7	6.9	6.4	5.9	5.7	15.1	12.9	10.8	10.2	12.6	8.6	8.3
85,0°	2.8	2.6	2.5	2.4	2.4	2.5	6.7	5.9	5.4	4.9	5.2	4.3	4.0
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	2.2	2.1	2.1	2.0	1.9	1.7	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	204.8	0.3	0.3
2,5°	190.7	189.5	188.2	187.3	186.4	185.7	185.3	184.9	184.7	184.2	184.4	2.4	2.7
5,0°	174.2	171.1	168.2	165.7	163.5	161.5	160.0	158.7	158.0	157.2	157.1	4.8	7.5
7,5°	157.4	152.4	147.7	143.5	139.8	136.6	134.0	132.1	130.6	129.5	129.2	7.0	14.6
10,0°	141.0	133.8	127.2	121.6	116.8	112.7	109.5	107.0	105.2	104.0	103.6	9.1	23.6
12,5°	124.9	116.3	108.4	101.9	96.7	92.6	89.5	87.2	85.7	84.7	84.4	11.1	34.7
15,0°	111.0	101.7	94.1	87.9	83.1	79.5	76.8	74.9	73.4	72.5	72.2	13.1	47.8
17,5°	98.8	89.9	81.4	74.6	69.9	66.9	65.0	63.8	62.9	62.3	62.1	15.1	62.9
20,0°	88.4	77.5	70.9	67.1	64.5	62.6	61.2	60.2	59.5	59.0	58.8	17.3	80.2
22,5°	76.3	69.9	66.6	64.8	63.1	61.6	60.2	59.1	58.3	57.7	57.4	19.6	99.8
25,0°	69.3	66.4	65.2	64.1	62.8	61.4	60.0	58.7	57.7	56.9	56.6	22.0	121.8
27,5°	65.8	64.8	64.3	63.8	62.9	61.7	60.1	58.5	57.1	56.0	55.5	24.3	146.0
30,0°	64.3	63.9	63.8	63.7	63.1	61.8	59.7	57.6	55.7	54.4	53.7	26.3	172.3
32,5°	63.0	63.0	63.3	63.3	62.5	60.8	58.6	56.5	54.5	52.9	52.1	28.1	200.4
35,0°	61.7	61.9	62.1	61.9	61.1	59.8	58.0	56.0	54.2	52.6	51.7	29.6	230.1
37,5°	60.1	60.2	60.2	60.2	59.8	58.9	57.1	55.0	53.0	51.3	50.3	31.0	261.1
40,0°	58.2	58.0	58.2	58.3	58.3	57.1	55.3	53.4	51.5	49.8	48.8	32.2	293.3
42,5°	55.8	55.8	56.0	56.3	55.9	54.8	53.5	52.1	50.5	48.8	47.7	33.2	326.5
45,0°	53.7	53.6	53.8	53.6	53.2	52.8	52.1	51.0	49.6	47.8	46.7	34.0	360.6
47,5°	51.9	51.7	51.5	51.0	51.2	51.2	50.9	50.5	49.3	47.6	46.6	36.3	396.9
50,0°	50.2	49.9	49.1	49.1	49.6	49.9	50.6	50.8	50.1	48.8	47.9	40.4	437.3
52,5°	48.7	48.0	47.6	47.7	48.4	49.9	51.9	53.2	52.9	52.1	51.7	45.7	483.0
55,0°	47.1	46.4	46.5	46.8	48.1	51.1	55.5	58.0	57.9	58.0	58.3	51.3	534.3
57,5°	45.5	45.2	45.8	46.5	48.8	54.1	61.2	64.5	63.9	64.7	65.9	55.9	590.2
60,0°	44.1	44.2	44.9	46.4	50.2	58.1	68.0	71.4	69.3	70.6	72.8	60.0	650.3
62,5°	43.1	43.1	44.1	46.7	52.3	62.6	73.9	76.1	72.0	73.2	75.8	66.5	716.7
65,0°	42.0	41.8	43.2	46.8	53.8	64.8	75.3	75.0	68.6	68.4	70.7	75.8	792.5
67,5°	40.0	39.9	41.4	45.6	52.8	62.1	68.9	66.5	59.7	59.6	61.6	78.1	870.6
70,0°	37.0	36.6	38.1	41.7	48.1	56.1	61.3	58.0	51.5	50.7	52.3	62.2	932.8
72,5°	31.9	31.2	32.8	36.8	42.3	48.1	50.6	46.7	40.8	39.7	41.0	35.6	968.4
75,0°	25.9	25.7	27.4	30.7	34.5	36.9	36.2	32.6	28.4	27.5	28.4	15.4	983.8
77,5°	19.9	19.9	20.7	22.3	24.1	25.7	25.4	22.7	20.1	19.4	20.0	7.4	991.2
80,0°	13.4	13.2	13.7	14.6	14.9	15.2	14.8	13.1	11.7	11.3	11.4	4.7	995.9
82,5°	7.9	7.6	7.7	7.6	7.7	7.7	7.1	6.1	5.5	5.4	5.4	2.6	998.5
85,0°	3.6	3.4	3.1	2.9	2.6	2.4	2.2	2.2	2.1	2.1	2.0	1.1	999.6
87,5°	1.5	1.5	1.4	1.3	1.2	1.2	1.1	1.1	1.1	1.1	1.1	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	102580	747.5
95	237	251	97457	695.8
90	221	249	92417	647.8
85	205	246	87048	599.3
80	191	244	82207	557.4
75	176	241	76866	513.2
70	162	238	71713	471.9
65	149	234	66814	433.6
60	136	231	61700	395.7
55	122	227	56235	355.1
50	110	223	51234	320.3
45	98	219	46151	285.7
40	86	214	40957	251.3
35	75	209	36111	219.1
30	63	203	30795	185.6
25	52	196	25672	154.6
20	41	187	20481	123.8
15	30	176	15239	93.4
10	20	161	10371	65.9
5	9	132	4909	35.9
2	3	91	1889	18.6

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	99000	742.3
95	236	251	94050	687.8
90	219	249	89052	636.8
85	203	246	84003	588.8
80	188	243	79056	544.4
75	174	240	74303	503.0
70	160	237	69386	461.8
65	146	234	64280	421.1
60	133	230	59481	383.1
55	120	227	54416	346.0
50	108	223	49514	311.4
45	96	218	44566	277.2
40	84	213	39543	242.4
35	73	208	34722	211.4
30	62	202	29919	180.7
25	51	195	24889	150.2
20	40	186	19779	119.7
15	29	175	14631	89.7
10	19	159	9773	62.5
5	9	132	4866	35.5
2	3	91	1874	18.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779116C01BA EAN: 4058352822746	LP number 59236_29
---	--	-------------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	102580.0	747.5
25.0	99000.0	742.3