


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
	Version post-top or side-entry mounting, Smart Interface up/down Optic pedestrian crossing, asymmetric right distribution (PC-R) Cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ - DALI2 Rated values Net luminous flux = 5910 lm Power consumption = 58.1 W Luminous efficacy = 101.7 lm/W	serial documentation 27.07.2023





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 835 cd/klm**

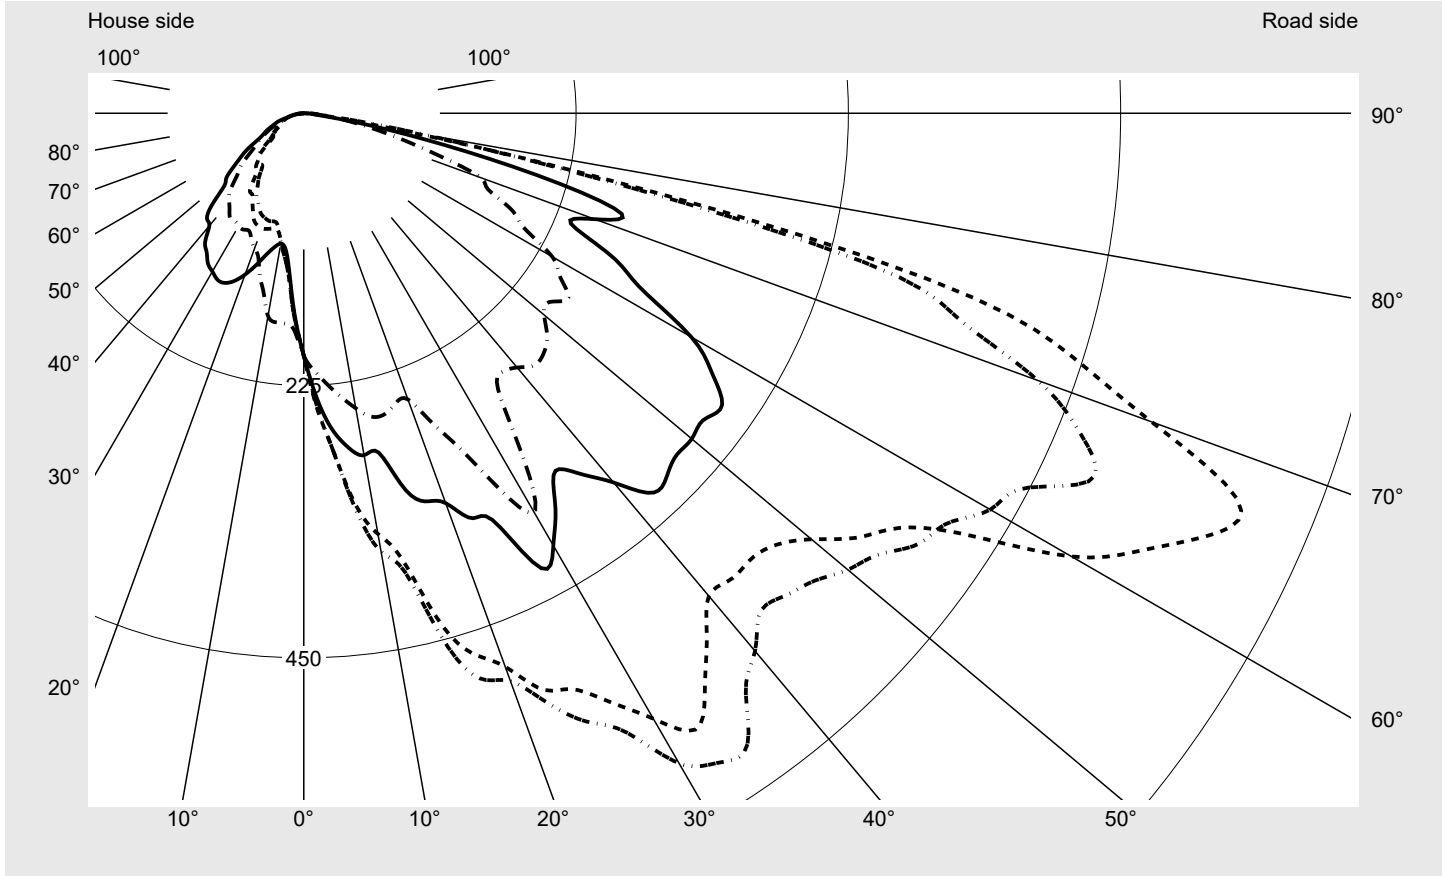

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
--	--	--------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

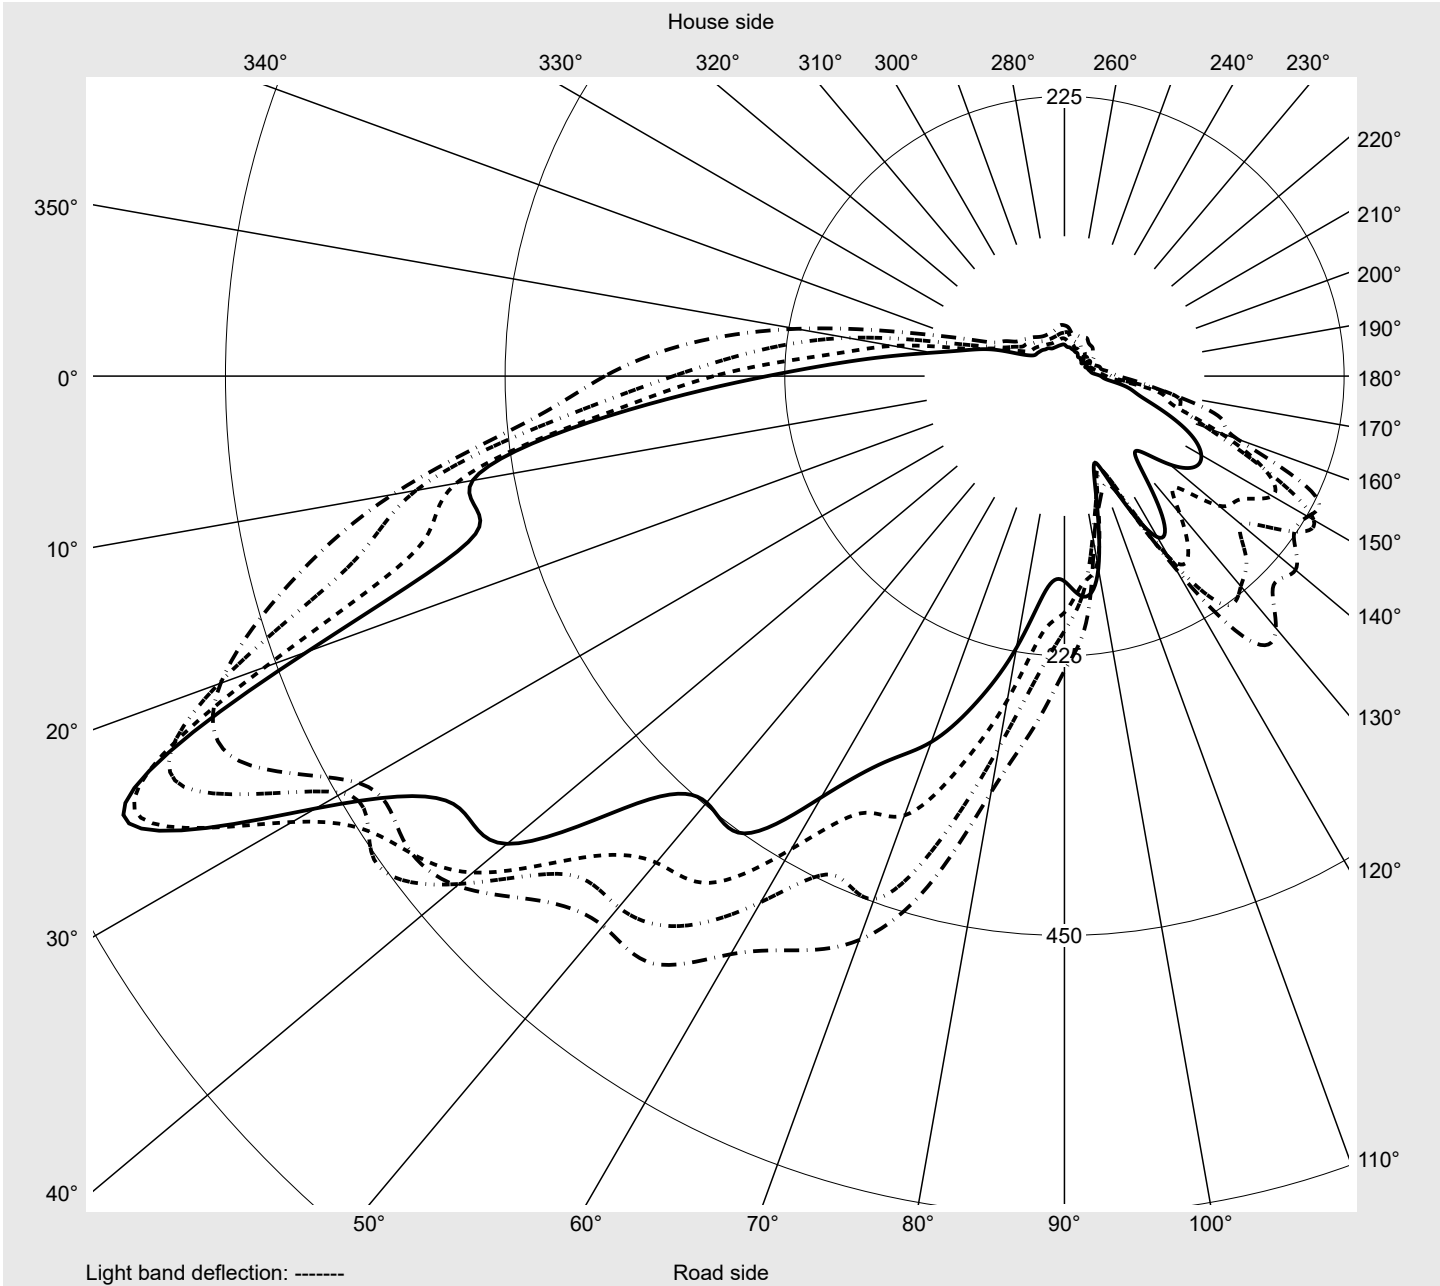

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	234.1	234.9	237.3	240.8	241.6	242.8	241.0	237.7	235.3	233.0	232.8	231.6	231.0	228.3
5,0°	261.2	274.7	280.2	280.4	280.2	280.2	280.4	284.7	292.2	294.5	290.2	286.1	279.2	272.0
7,5°	278.1	285.5	296.7	312.2	320.2	325.7	330.8	334.2	337.7	341.6	344.7	337.3	324.0	305.1
10,0°	286.9	306.5	317.5	333.2	348.1	353.0	367.9	377.7	385.5	392.6	387.1	382.2	380.4	370.4
12,5°	287.5	311.6	325.9	341.4	366.3	378.3	389.1	397.1	396.5	401.8	410.4	399.3	380.2	365.9
15,0°	321.0	348.3	375.3	395.9	415.1	436.1	454.0	454.0	437.7	426.9	418.1	405.1	387.3	372.4
17,5°	336.3	373.0	394.9	420.2	442.0	468.7	490.4	492.8	496.7	479.3	459.7	426.5	401.4	377.7
20,0°	342.8	381.8	414.0	451.8	478.1	486.7	499.3	516.5	509.9	502.6	491.2	469.5	449.1	404.0
22,5°	362.2	388.5	420.0	462.8	495.7	515.2	527.7	528.3	523.0	522.2	517.5	523.0	492.8	457.3
25,0°	372.0	427.1	474.6	494.0	505.0	525.0	554.8	571.6	591.8	558.7	552.4	540.3	517.7	472.4
27,5°	423.4	473.2	493.6	496.1	514.0	548.5	576.5	613.0	634.2	640.7	614.4	566.1	555.0	523.2
30,0°	412.4	439.7	479.7	545.0	564.4	577.7	620.1	609.5	622.2	649.5	647.9	601.8	565.4	534.2
32,5°	387.1	449.1	500.6	557.3	582.8	603.4	636.5	654.6	661.1	673.8	686.7	657.7	608.3	579.3
35,0°	361.6	404.6	441.8	492.2	562.0	577.9	638.5	639.3	685.4	719.9	733.4	716.7	669.3	635.8
37,5°	375.7	403.4	418.1	448.7	498.1	547.1	599.9	660.1	690.1	741.8	773.8	772.4	729.7	678.3
40,0°	398.3	408.5	417.9	438.5	462.0	520.8	580.1	662.4	724.4	792.2	768.9	783.8	736.9	693.2
42,5°	425.5	426.5	428.3	445.5	482.8	522.4	558.7	635.0	718.5	747.5	786.8	754.0	716.7	689.7
45,0°	424.2	435.9	437.7	464.6	490.6	521.8	563.4	603.2	697.5	757.7	764.8	741.1	729.5	678.5
47,5°	417.9	426.1	448.5	480.4	508.9	528.3	572.0	596.5	654.4	723.6	744.4	731.3	718.9	674.4
50,0°	418.5	440.6	481.0	489.3	519.5	547.7	586.9	607.3	642.0	679.5	718.5	716.2	687.5	666.5
52,5°	416.3	441.6	490.4	507.7	546.3	576.1	598.9	628.7	649.7	657.1	685.6	686.0	659.5	636.5
55,0°	421.8	451.2	494.0	548.3	605.4	597.9	620.3	641.6	618.7	628.3	641.6	632.4	625.4	597.1
57,5°	400.2	460.2	545.7	614.8	680.9	647.5	630.5	633.2	637.3	604.8	599.9	608.7	567.1	557.5
60,0°	369.8	436.5	548.9	645.4	722.4	732.6	655.0	649.7	637.9	596.9	577.5	576.9	537.1	509.7
62,5°	314.7	412.4	529.7	597.7	724.4	781.7	670.9	678.1	635.6	566.9	557.9	540.1	488.7	442.6
65,0°	282.2	378.3	497.1	539.7	684.4	825.4	717.5	656.9	621.4	547.7	511.0	497.7	439.3	388.1
67,5°	239.2	368.1	483.4	490.6	648.3	835.4	695.6	600.1	585.4	486.1	447.9	449.1	391.4	342.8
70,0°	255.9	379.3	476.9	494.8	561.4	745.4	645.6	559.9	510.8	436.5	401.0	392.2	324.2	291.0
72,5°	275.1	380.6	448.3	489.1	547.9	663.8	568.7	464.8	396.5	364.2	319.4	302.8	259.4	217.5
75,0°	204.5	315.3	388.5	434.2	476.7	543.6	487.3	345.7	283.4	250.4	266.7	273.2	216.7	162.4
77,5°	112.2	180.8	224.7	278.1	266.1	275.5	248.5	199.0	172.8	169.0	193.4	205.1	156.5	116.9
80,0°	47.7	55.1	72.4	96.9	82.0	82.4	99.1	99.8	98.7	98.5	77.7	98.5	86.7	68.4
82,5°	12.2	14.1	15.9	18.4	21.4	23.5	31.6	41.6	37.8	35.7	33.9	40.0	41.6	41.4
85,0°	8.0	8.8	9.8	10.8	11.4	12.0	12.0	12.0	12.0	12.7	14.3	16.5	18.8	21.4
87,5°	3.5	5.3	6.1	6.7	7.1	7.6	7.6	7.3	7.1	6.7	6.5	6.5	6.7	7.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
---	--	--------------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	225.1	222.6	220.2	217.7	213.6	209.4	205.1	201.2	196.3	192.8	190.4	188.6	186.5	184.5
5,0°	261.8	248.1	237.5	230.8	225.1	221.2	214.1	207.7	197.7	189.8	183.4	176.7	172.0	166.9
7,5°	291.4	283.4	268.3	254.7	236.5	225.9	215.3	200.4	188.6	177.5	172.4	160.2	150.8	144.7
10,0°	346.3	318.7	294.3	265.1	247.5	228.3	210.8	195.7	181.0	165.1	157.1	150.6	145.7	141.4
12,5°	357.9	333.8	294.3	277.3	256.7	230.2	216.5	199.4	180.2	166.9	159.8	153.7	142.0	136.9
15,0°	347.5	323.4	302.6	272.0	257.5	241.8	220.8	196.9	178.8	167.7	161.6	150.4	141.8	139.0
17,5°	347.5	317.7	297.7	265.1	251.6	227.7	208.1	190.4	176.5	164.3	156.9	152.8	149.4	144.1
20,0°	367.1	328.7	323.0	282.6	251.6	242.2	212.4	192.0	171.8	163.7	157.5	154.7	154.7	151.4
22,5°	386.3	351.2	328.1	295.7	276.7	253.8	223.2	196.7	176.9	164.5	156.9	155.1	157.7	158.3
25,0°	430.8	386.3	341.0	317.9	305.9	270.6	231.6	194.7	173.2	164.7	157.9	157.1	160.6	165.1
27,5°	475.5	434.2	385.3	368.5	349.8	307.5	237.9	192.4	170.6	158.6	155.9	160.8	165.7	173.0
30,0°	518.7	476.5	411.6	377.3	380.6	291.0	227.9	183.2	164.5	158.8	157.3	164.1	173.2	181.2
32,5°	548.3	502.0	409.1	338.3	337.5	265.3	209.2	177.7	158.3	154.3	159.4	169.6	179.8	191.0
35,0°	594.0	514.6	418.7	327.3	280.8	235.3	187.3	167.9	154.9	154.5	162.4	175.3	189.8	200.0
37,5°	602.4	508.1	427.3	337.1	269.4	214.7	175.9	162.4	153.2	154.1	165.7	181.6	196.9	207.9
40,0°	627.3	540.1	456.3	351.8	274.3	202.4	169.4	158.1	147.5	151.6	167.1	188.3	205.7	218.8
42,5°	625.2	560.3	489.3	373.4	282.2	201.2	168.6	155.7	142.6	149.6	165.5	192.8	209.8	238.3
45,0°	648.9	555.9	494.4	372.4	280.4	206.1	165.7	149.8	138.6	144.7	165.9	191.8	223.0	243.9
47,5°	636.0	546.1	474.6	363.6	272.8	204.7	167.7	144.1	135.7	141.6	162.6	194.7	232.6	260.2
50,0°	596.1	513.8	447.3	340.6	259.2	212.8	169.6	137.9	130.0	136.3	161.8	204.1	251.0	260.4
52,5°	585.6	493.8	403.4	319.1	256.1	207.7	161.0	129.4	121.8	129.2	170.6	224.7	270.6	261.2
55,0°	576.9	485.3	382.6	305.5	266.7	222.0	163.2	124.5	114.7	136.9	177.9	239.6	270.4	266.5
57,5°	528.7	471.8	344.9	309.8	251.0	208.5	150.6	118.2	105.1	123.9	177.3	253.8	276.3	256.1
60,0°	482.8	425.3	340.0	283.8	237.1	199.4	136.5	107.5	93.5	108.2	178.8	259.6	264.7	237.9
62,5°	447.7	386.5	303.0	241.0	205.1	174.7	131.0	99.2	82.0	100.8	169.6	224.5	220.8	206.7
65,0°	376.1	326.1	264.9	208.1	190.2	167.7	152.6	104.1	79.0	104.9	169.2	173.7	144.3	126.5
67,5°	313.2	271.0	221.8	173.2	165.1	178.1	157.1	97.7	74.5	109.4	149.6	136.9	93.9	85.5
70,0°	255.1	226.9	179.4	146.5	155.3	166.1	127.1	83.3	73.9	92.0	116.3	106.1	67.3	73.3
72,5°	190.2	181.6	133.0	116.5	118.6	115.3	83.9	47.5	49.2	64.7	63.9	63.7	47.1	58.6
75,0°	129.2	128.4	107.5	92.6	85.1	67.1	44.3	31.4	29.6	46.1	35.7	38.8	38.4	40.6
77,5°	91.8	89.8	79.2	66.5	58.8	42.6	29.8	25.3	24.3	24.9	29.0	29.0	29.0	26.9
80,0°	64.7	61.4	54.9	43.7	38.0	27.1	21.4	20.6	19.0	19.0	20.6	19.8	18.4	19.4
82,5°	41.6	39.0	34.1	28.4	23.1	17.3	14.5	15.5	16.1	13.3	12.7	13.5	12.9	12.9
85,0°	22.0	20.0	17.8	15.3	11.6	8.8	7.1	8.4	10.0	8.4	7.8	8.2	8.0	8.0
87,5°	7.8	7.8	6.1	4.7	3.9	2.9	2.7	3.3	3.1	3.5	3.7	3.7	3.7	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	182.8	181.8	180.8	179.4	176.5	173.5	171.2	169.0	167.9	167.9	168.6	169.2	169.8	169.8
5,0°	161.6	156.7	153.9	150.0	146.7	141.8	138.4	135.1	133.9	133.7	134.5	135.3	136.3	137.9
7,5°	139.8	134.7	131.8	129.4	125.9	121.2	118.8	115.9	113.9	113.5	115.3	117.1	118.8	119.6
10,0°	134.3	129.0	126.9	124.1	120.0	116.5	114.3	112.0	109.4	107.3	107.3	106.7	106.7	107.7
12,5°	132.2	131.0	128.1	127.9	124.7	122.4	119.8	117.5	113.7	110.2	107.5	105.1	101.6	99.0
15,0°	136.1	134.7	134.1	134.5	133.0	131.8	129.2	126.7	121.4	116.7	113.3	108.8	103.9	98.6
17,5°	142.2	142.2	143.0	145.7	145.5	144.9	142.0	138.6	131.8	125.5	120.8	114.5	107.7	100.2
20,0°	150.6	151.4	154.9	158.1	158.8	158.1	155.3	150.6	141.8	134.1	127.5	119.2	110.4	101.2
22,5°	159.4	162.8	168.3	171.8	172.8	171.0	166.9	161.0	150.0	140.8	132.2	121.6	110.6	100.2
25,0°	168.8	174.3	180.8	184.1	183.7	180.8	174.9	167.3	154.7	144.7	134.3	121.8	108.6	97.3
27,5°	180.2	185.9	191.0	192.0	190.2	186.5	180.2	170.4	154.9	142.8	132.0	120.2	103.5	91.0
30,0°	188.8	194.1	197.5	197.1	195.1	191.8	181.6	167.9	151.0	138.6	125.5	110.8	96.1	84.7
32,5°	198.5	202.6	204.7	207.7	201.8	188.6	176.5	163.2	147.3	135.7	125.1	104.5	88.4	79.4
35,0°	206.7	214.7	219.6	206.9	193.7	188.3	177.1	159.4	140.0	126.9	115.9	98.4	81.8	77.5
37,5°	217.5	227.5	211.6	202.2	199.0	181.0	164.3	149.0	133.9	122.2	109.4	89.4	77.1	66.1
40,0°	234.9	223.6	218.1	201.6	183.9	178.3	162.8	144.1	121.4	109.0	97.1	79.8	76.9	60.8
42,5°	235.9	228.7	210.0	199.0	191.4	167.9	150.0	136.7	118.4	103.3	87.7	76.5	68.2	58.2
45,0°	248.1	224.3	215.3	192.6	190.4	173.9	147.1	125.7	107.5	92.0	76.1	67.7	59.2	51.8
47,5°	241.4	231.0	211.4	191.6	175.5	160.2	143.5	110.4	89.4	80.0	65.9	64.7	51.2	48.0
50,0°	249.6	230.2	211.6	191.4	170.6	160.8	124.1	103.7	83.7	70.6	57.1	51.4	42.4	37.1
52,5°	248.3	232.8	197.9	184.3	201.4	155.9	119.0	99.8	73.7	56.9	48.8	43.5	40.6	31.8
55,0°	245.9	221.2	202.4	211.4	207.9	151.4	113.7	86.7	63.9	51.0	44.5	38.6	39.8	34.1
57,5°	251.4	216.7	208.5	242.8	194.7	141.6	100.8	70.0	54.9	44.3	36.1	31.4	33.5	30.0
60,0°	242.6	225.3	226.1	219.2	147.9	130.2	90.6	61.6	43.7	36.9	30.6	29.2	25.7	25.3
62,5°	185.9	216.5	231.6	178.6	123.0	96.9	90.4	51.2	37.8	31.8	25.9	23.7	21.6	22.2
65,0°	162.2	172.8	193.0	177.7	133.0	90.8	78.4	45.9	33.7	27.5	23.5	21.4	20.2	19.6
67,5°	110.6	127.5	127.1	112.6	86.9	63.7	51.2	34.9	29.2	23.5	21.2	20.0	19.2	18.6
70,0°	69.2	79.2	75.3	71.6	50.2	43.1	32.9	27.3	25.1	20.4	19.2	18.6	18.0	17.5
72,5°	55.3	49.8	49.6	34.9	29.6	26.5	25.1	23.1	21.6	17.5	16.7	16.3	15.9	15.7
75,0°	39.2	36.7	29.6	25.3	23.3	21.4	20.8	17.3	15.9	15.1	14.5	14.1	13.9	13.5
77,5°	25.5	23.5	22.9	19.8	18.4	16.9	15.7	13.7	12.7	12.0	11.6	11.4	11.2	11.0
80,0°	18.2	17.1	16.9	14.9	13.9	12.9	11.4	10.6	9.8	9.4	9.0	8.8	8.6	8.6
82,5°	12.7	12.0	11.8	10.8	10.0	9.2	8.6	7.8	7.3	6.9	6.7	6.7	6.5	6.3
85,0°	8.0	7.8	7.3	7.1	6.7	6.3	5.9	5.5	5.1	4.9	4.7	4.7	4.5	4.5
87,5°	3.5	3.5	3.3	3.3	3.1	2.9	2.7	2.7	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
Table of values for luminous intensities		Maximum luminous intensity



C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	170.6	172.8	175.3	178.3	180.4	180.4	179.6	179.6	178.8	177.9	176.7	177.1	179.6	182.6
5,0°	138.4	140.0	142.8	148.4	156.1	165.1	167.7	168.1	169.0	169.2	170.2	172.4	174.5	176.7
7,5°	120.2	121.2	124.9	125.3	126.3	129.6	140.4	151.8	159.8	168.1	173.0	173.7	174.3	174.7
10,0°	108.8	109.6	112.6	116.9	120.8	122.6	124.9	130.6	147.7	156.3	159.6	165.1	170.2	168.8
12,5°	96.7	99.2	100.4	100.4	102.8	106.7	116.5	120.6	129.4	137.7	141.2	147.7	152.6	157.3
15,0°	92.6	88.2	85.9	85.1	85.9	87.7	90.2	103.3	110.4	119.6	124.9	128.8	139.8	143.2
17,5°	93.5	86.5	80.4	76.7	75.3	75.7	75.7	78.8	88.6	100.6	111.8	121.2	124.9	126.7
20,0°	92.4	84.7	77.7	72.4	69.0	67.7	69.4	72.6	77.5	84.3	94.3	111.0	119.0	118.8
22,5°	90.8	81.0	73.7	68.2	65.3	65.3	65.7	69.0	70.6	79.2	90.2	99.0	112.8	118.6
25,0°	86.9	77.3	69.2	63.7	62.0	62.6	65.3	69.4	71.6	76.1	86.7	97.1	107.1	116.3
27,5°	82.0	73.1	65.1	59.8	57.1	61.2	67.3	70.0	71.8	77.5	88.4	97.3	108.4	117.1
30,0°	78.4	71.8	61.4	57.5	56.9	59.8	66.5	71.0	73.5	77.7	89.6	100.4	107.5	114.3
32,5°	70.8	63.9	59.2	58.2	58.2	59.8	63.5	68.0	72.8	76.3	92.8	103.1	105.9	108.2
35,0°	64.5	58.2	57.5	58.8	60.4	60.4	63.5	63.9	71.6	75.9	86.7	100.8	105.9	104.5
37,5°	56.5	53.7	57.7	63.5	61.4	60.8	62.4	64.5	72.0	78.8	82.4	95.5	100.8	97.9
40,0°	55.3	53.3	58.4	60.8	58.0	58.2	61.8	66.7	73.3	77.3	81.4	90.8	95.9	84.9
42,5°	56.9	64.3	62.4	58.4	57.1	58.8	61.4	65.3	71.6	70.8	78.6	87.3	91.4	79.6
45,0°	52.2	68.4	68.0	58.4	55.7	58.0	59.0	59.6	65.1	65.9	71.0	80.4	82.8	73.3
47,5°	50.0	57.5	68.2	68.4	58.2	48.6	53.1	56.3	58.8	61.4	65.3	74.7	73.9	70.0
50,0°	42.9	48.4	61.0	81.4	66.3	52.4	49.6	52.2	55.1	59.4	58.6	65.7	68.4	63.3
52,5°	34.9	40.6	48.4	66.1	74.9	61.0	47.3	48.4	50.6	53.3	51.4	57.1	58.8	55.5
55,0°	31.2	31.6	40.4	56.3	65.9	71.4	55.1	44.1	45.3	46.5	44.7	52.2	50.6	50.8
57,5°	28.0	29.4	34.7	41.4	49.0	51.8	46.7	40.4	39.2	39.8	39.8	44.1	45.1	46.9
60,0°	26.5	29.2	30.0	32.0	32.4	33.5	35.5	33.9	34.1	34.1	34.7	39.0	40.8	41.0
62,5°	23.9	22.9	23.7	23.3	25.3	25.1	26.5	29.2	28.8	29.2	30.2	34.9	35.1	34.5
65,0°	21.4	19.8	20.2	21.4	20.8	22.2	23.5	24.3	24.3	26.3	26.7	28.4	30.2	30.2
67,5°	22.0	17.8	17.8	18.6	19.2	19.0	21.0	21.2	22.0	22.7	23.5	23.7	25.3	25.3
70,0°	19.8	16.5	15.9	15.9	16.1	16.7	17.5	18.4	19.2	19.6	19.4	20.2	21.0	21.8
72,5°	15.9	14.9	14.3	14.1	14.1	14.5	14.7	15.1	16.1	16.3	16.1	16.3	17.1	18.0
75,0°	13.3	12.9	12.4	12.2	12.2	12.2	12.4	12.4	13.3	13.3	13.1	13.3	13.5	14.1
77,5°	10.8	10.6	10.2	10.0	10.0	10.0	10.0	10.0	10.6	10.6	10.0	10.2	10.4	10.8
80,0°	8.4	8.2	8.0	7.8	7.6	7.6	7.6	7.6	8.0	7.8	7.1	6.7	7.3	8.0
82,5°	6.1	6.1	5.9	5.7	5.7	5.5	5.3	5.3	5.3	5.7	4.5	3.5	4.7	5.5
85,0°	4.5	4.3	4.1	4.1	3.9	3.7	3.5	3.3	3.3	3.1	2.9	2.4	2.9	2.9
87,5°	2.4	2.4	2.4	2.2	2.2	2.2	2.0	1.8	1.6	1.4	1.2	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	184.5	186.5	189.2	192.8	196.3	199.4	201.4	204.5	206.3	209.0	210.8	215.1	219.2	222.0
5,0°	177.5	179.0	179.8	181.4	184.5	190.0	197.3	205.1	213.6	220.8	223.4	227.3	231.8	235.5
7,5°	169.8	173.2	179.8	185.7	188.3	190.0	196.3	211.6	219.0	225.3	230.6	238.1	243.0	249.4
10,0°	170.4	169.8	170.2	171.2	178.3	189.8	198.8	218.1	226.7	227.9	232.4	234.9	241.0	251.4
12,5°	156.1	158.3	158.6	163.7	164.7	170.6	179.8	202.0	206.9	218.1	220.8	226.1	234.1	244.3
15,0°	143.9	146.5	148.8	149.6	149.0	159.6	165.1	184.5	196.9	203.9	209.4	219.2	237.5	262.4
17,5°	129.4	135.7	139.2	141.8	146.9	155.1	172.6	179.6	182.0	191.8	205.9	222.0	241.6	262.4
20,0°	121.4	126.3	134.9	142.4	151.6	161.2	168.8	171.6	176.9	184.9	199.2	213.6	231.2	269.8
22,5°	123.3	131.0	134.3	141.2	149.4	152.6	156.5	156.7	161.4	175.7	190.8	212.2	236.3	267.9
25,0°	124.5	132.4	127.7	132.6	136.1	134.1	138.4	143.7	152.6	165.9	182.8	200.8	224.7	259.8
27,5°	118.4	122.6	119.2	119.4	119.8	123.9	129.6	136.7	145.1	158.8	177.3	203.9	231.8	262.4
30,0°	114.7	112.2	116.9	114.5	111.0	115.9	122.8	130.8	142.8	154.3	172.8	200.6	227.3	260.6
32,5°	106.7	100.8	106.1	105.9	103.1	107.3	115.1	125.3	135.5	150.8	173.7	197.9	229.2	259.8
35,0°	95.5	92.4	97.3	94.3	94.7	98.4	105.5	113.5	127.5	138.8	165.1	195.5	221.0	254.9
37,5°	84.5	84.1	87.1	85.7	85.7	87.9	94.5	105.3	116.9	127.9	150.6	194.3	232.0	262.4
40,0°	77.5	76.9	79.8	78.2	76.3	78.2	84.7	93.9	105.9	116.7	135.3	186.3	226.9	262.6
42,5°	72.6	70.8	71.4	71.2	70.2	71.0	76.3	84.1	96.5	109.8	129.0	168.1	231.8	274.3
45,0°	69.4	66.3	65.3	64.9	64.9	66.1	70.2	76.9	90.0	102.0	121.2	144.1	221.8	288.9
47,5°	67.7	62.0	60.2	60.2	60.0	61.6	65.9	72.6	82.6	97.3	112.0	127.5	203.9	287.3
50,0°	61.8	56.9	55.3	54.5	55.3	57.1	61.4	66.3	76.1	89.4	100.2	114.5	180.6	268.9
52,5°	56.9	51.8	50.2	49.4	50.0	52.4	56.1	60.8	67.5	79.0	89.6	101.0	144.5	255.7
55,0°	49.4	46.9	45.3	44.7	45.3	47.7	51.0	54.5	59.6	68.2	77.3	88.4	111.8	237.3
57,5°	43.7	41.6	40.6	40.4	40.8	43.3	45.9	48.8	51.8	57.3	64.9	74.5	108.2	196.1
60,0°	38.6	36.9	36.3	36.1	36.7	38.4	40.6	42.4	45.3	48.4	56.1	64.1	89.0	136.9
62,5°	33.3	32.4	32.0	32.2	32.6	34.1	35.7	37.1	40.0	41.4	47.1	54.5	70.6	106.5
65,0°	29.0	28.6	28.2	28.6	29.2	30.0	31.2	32.4	33.3	34.7	40.2	50.2	64.9	86.1
67,5°	24.9	24.5	24.3	24.5	25.9	26.3	27.3	28.0	28.6	29.4	33.5	43.7	62.9	81.0
70,0°	21.2	21.0	20.8	21.0	22.4	22.9	23.3	23.7	24.1	24.7	27.8	34.7	52.4	72.2
72,5°	17.3	17.3	17.5	18.2	19.2	19.8	19.6	19.4	19.8	20.2	23.3	28.2	37.5	61.8
75,0°	14.1	14.3	14.7	15.1	16.3	16.5	15.9	15.5	15.7	16.5	17.8	22.9	25.3	48.4
77,5°	11.2	11.2	11.4	12.0	13.3	13.3	12.9	12.0	12.0	12.7	13.3	16.7	20.0	33.3
80,0°	8.4	8.4	8.6	9.2	9.8	10.0	9.4	8.8	8.8	9.2	9.6	10.4	15.9	21.6
82,5°	5.7	5.5	5.7	6.3	6.7	6.3	6.1	5.9	5.9	6.3	6.5	6.9	7.6	8.4
85,0°	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.5	3.5	3.7	3.9	4.3	4.7	5.1
87,5°	1.0	1.2	1.2	1.4	1.4	1.4	1.6	1.6	1.6	1.8	2.0	2.2	2.7	3.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
--	--	-------------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/klm				
Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	224.3	227.3	2.4	2.7
5,0°	241.6	251.2	4.8	7.5
7,5°	260.4	269.8	7.3	14.8
10,0°	263.6	273.8	9.9	24.7
12,5°	258.5	272.0	12.2	36.9
15,0°	281.2	295.7	14.9	51.8
17,5°	277.9	298.3	17.6	69.4
20,0°	299.6	312.6	20.6	90.0
22,5°	287.5	323.2	23.7	113.6
25,0°	300.6	328.3	27.0	140.6
27,5°	306.3	358.5	30.9	171.5
30,0°	304.0	357.3	33.9	205.4
32,5°	309.4	353.6	36.8	242.2
35,0°	303.6	339.8	38.9	281.1
37,5°	333.4	361.2	41.1	322.3
40,0°	346.7	366.5	43.3	365.6
42,5°	343.8	386.5	45.3	410.9
45,0°	333.6	405.9	46.9	457.9
47,5°	339.1	405.9	47.9	505.7
50,0°	336.7	398.9	48.6	554.3
52,5°	318.1	401.2	49.2	603.5
55,0°	303.2	390.0	49.8	653.4
57,5°	257.5	352.8	49.8	703.1
60,0°	219.0	302.4	48.9	752.0
62,5°	177.1	244.1	46.3	798.4
65,0°	140.0	193.2	43.5	841.8
67,5°	108.4	159.0	39.4	881.2
70,0°	93.5	158.6	35.2	916.3
72,5°	86.1	162.2	29.9	946.3
75,0°	57.7	90.0	23.8	970.0
77,5°	41.6	64.3	15.3	985.4
80,0°	24.1	29.0	7.8	993.2
82,5°	9.6	11.0	3.8	997.0
85,0°	5.9	6.7	2.0	999.1
87,5°	3.5	4.1	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2F21Y08HE EAN: 4058352918968	LP number 58932_173
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5910	58.1	60.6	59.4
95	241	252	5608	54.6	56.8	55.7
90	229	250	5328	51.4	53.5	52.4
85	216	248	5026	48.1	50.0	49.0
80	203	246	4723	44.8	46.6	45.7
75	190	243	4421	41.6	43.3	42.4
70	178	241	4142	38.7	40.3	39.5
65	165	238	3839	35.7	37.1	36.4
60	152	235	3537	32.7	33.9	33.3
55	140	232	3257	30.0	31.2	30.6
50	127	229	2955	27.1	28.1	27.6
45	114	225	2653	24.2	25.2	24.7
40	102	221	2373	21.7	22.5	22.1
35	89	216	2071	19.0	19.7	19.4
30	76	210	1768	16.4	17.0	16.7
25	63	203	1466	13.8	14.2	14.0
20	51	195	1187	11.3	11.7	11.5
15	38	184	884	8.7	9.0	8.8
14	35	181	814	8.2	8.4	8.3