


Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
	Version post-top or side-entry mounting, Smart Interface up/down Optic pedestrian crossing, asymmetric left distribution (PC-L) Cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 12730 lm Power consumption = 122.8 W Luminous efficacy = 103.7 lm/W	serial documentation 31.07.2023



Luminous intensity in cd/klm C180-0 C270-90 C335-155 C340-160 **Imax: 835 cd/klm**

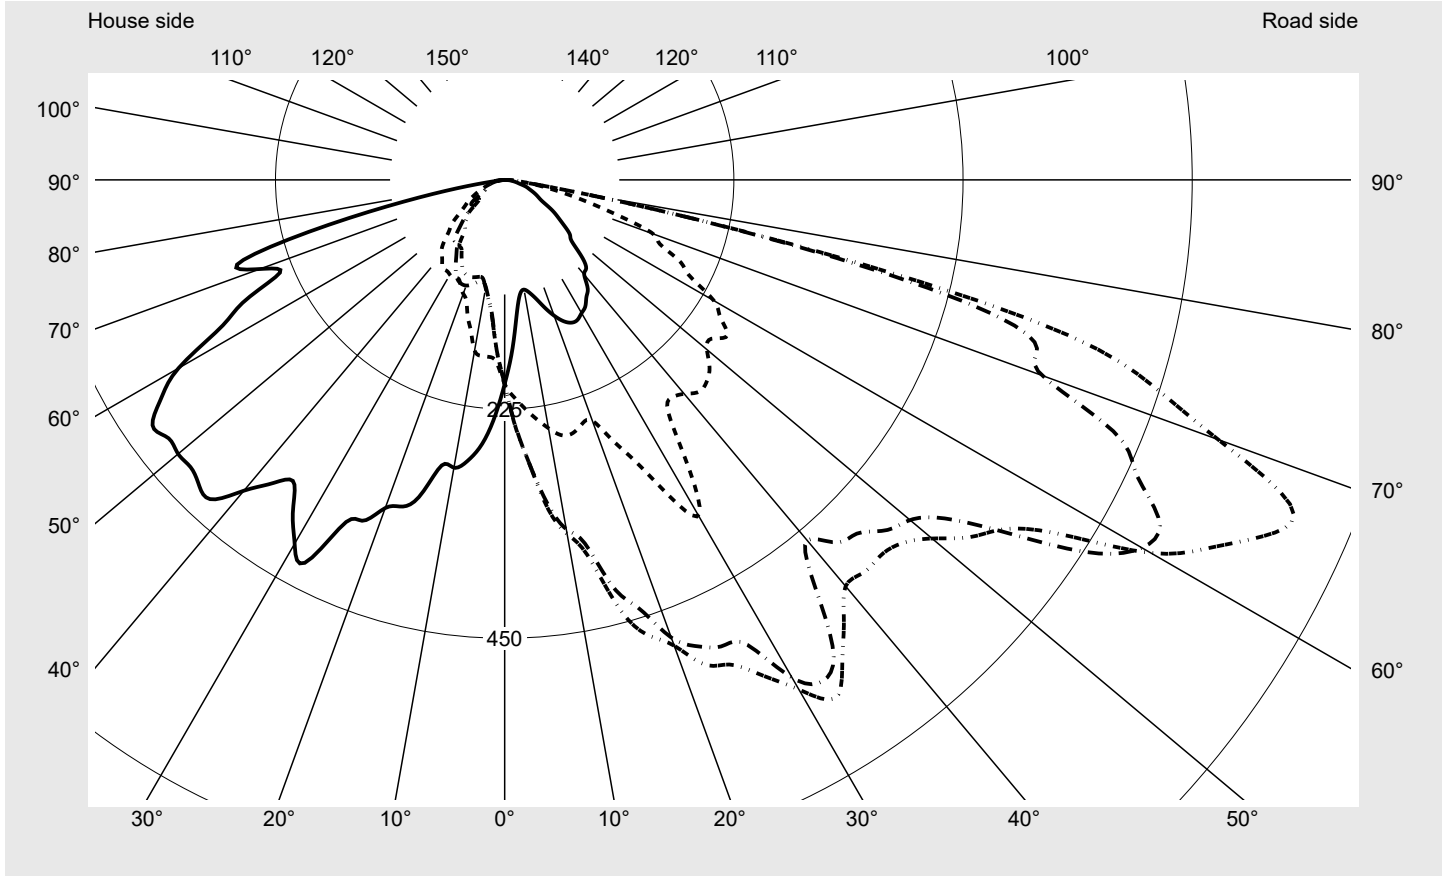

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
--	--	-------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

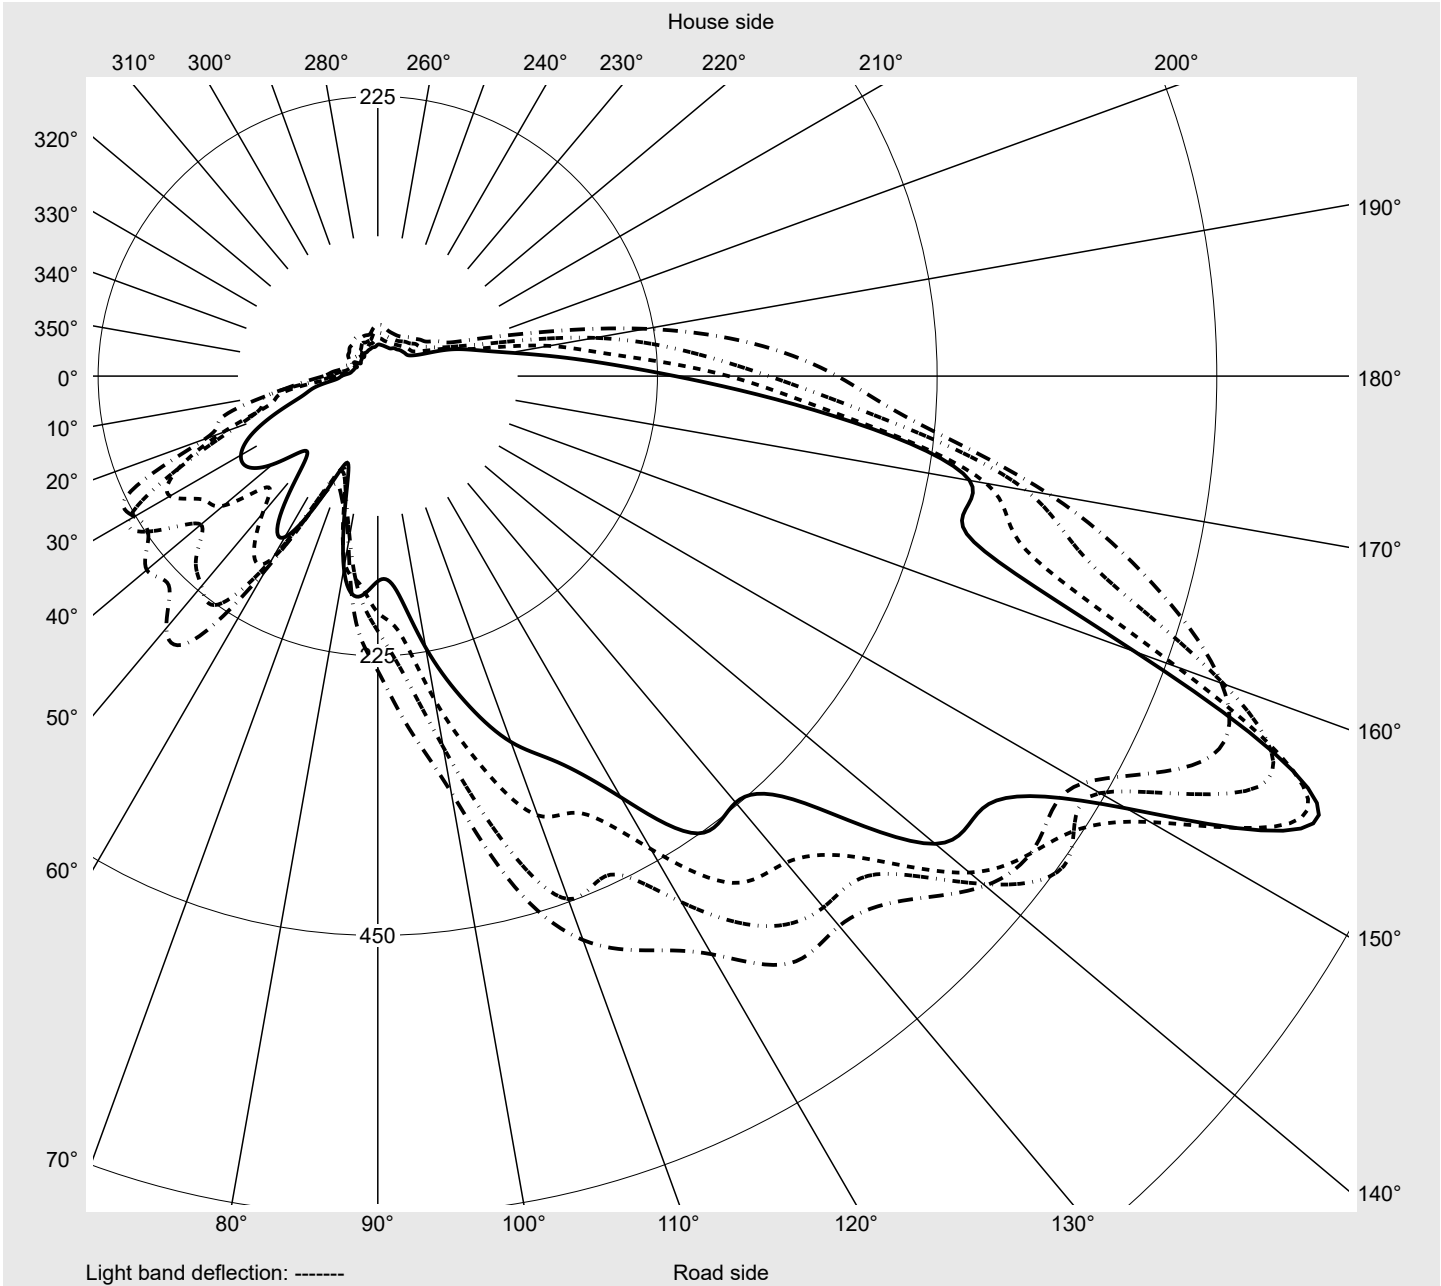

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	167.9	169.0	171.2	173.5	176.5	179.4	180.8	181.8	182.8	184.5	186.5	188.6	190.4	192.8
5,0°	133.9	135.1	138.4	141.8	146.7	150.0	153.9	156.7	161.6	166.9	172.0	176.7	183.4	189.8
7,5°	113.9	115.9	118.8	121.2	125.9	129.4	131.8	134.7	139.8	144.7	150.8	160.2	172.4	177.5
10,0°	109.4	112.0	114.3	116.5	120.0	124.1	126.9	129.0	134.3	141.4	145.7	150.6	157.1	165.1
12,5°	113.7	117.5	119.8	122.4	124.7	127.9	128.1	131.0	132.2	136.9	142.0	153.7	159.8	166.9
15,0°	121.4	126.7	129.2	131.8	133.0	134.5	134.1	134.7	136.1	139.0	141.8	150.4	161.6	167.7
17,5°	131.8	138.6	142.0	144.9	145.5	145.7	143.0	142.2	142.2	144.1	149.4	152.8	156.9	164.3
20,0°	141.8	150.6	155.3	158.1	158.8	158.1	154.9	151.4	150.6	151.4	154.7	154.7	157.5	163.7
22,5°	150.0	161.0	166.9	171.0	172.8	171.8	168.3	162.8	159.4	158.3	157.7	155.1	156.9	164.5
25,0°	154.7	167.3	174.9	180.8	183.7	184.1	180.8	174.3	168.8	165.1	160.6	157.1	157.9	164.7
27,5°	154.9	170.4	180.2	186.5	190.2	192.0	191.0	185.9	180.2	173.0	165.7	160.8	155.9	158.6
30,0°	151.0	167.9	181.6	191.8	195.1	197.1	197.5	194.1	188.8	181.2	173.2	164.1	157.3	158.8
32,5°	147.3	163.2	176.5	188.6	201.8	207.7	204.7	202.6	198.5	191.0	179.8	169.6	159.4	154.3
35,0°	140.0	159.4	177.1	188.3	193.7	206.9	219.6	214.7	206.7	200.0	189.8	175.3	162.4	154.5
37,5°	133.9	149.0	164.3	181.0	199.0	202.2	211.6	227.5	217.5	207.9	196.9	181.6	165.7	154.1
40,0°	121.4	144.1	162.8	178.3	183.9	201.6	218.1	223.6	234.9	218.8	205.7	188.3	167.1	151.6
42,5°	118.4	136.7	150.0	167.9	191.4	199.0	210.0	228.7	235.9	238.3	209.8	192.8	165.5	149.6
45,0°	107.5	125.7	147.1	173.9	190.4	192.6	215.3	224.3	248.1	243.9	223.0	191.8	165.9	144.7
47,5°	89.4	110.4	143.5	160.2	175.5	191.6	211.4	231.0	241.4	260.2	232.6	194.7	162.6	141.6
50,0°	83.7	103.7	124.1	160.8	170.6	191.4	211.6	230.2	249.6	260.4	251.0	204.1	161.8	136.3
52,5°	73.7	99.8	119.0	155.9	201.4	184.3	197.9	232.8	248.3	261.2	270.6	224.7	170.6	129.2
55,0°	63.9	86.7	113.7	151.4	207.9	211.4	202.4	221.2	245.9	266.5	270.4	239.6	177.9	136.9
57,5°	54.9	70.0	100.8	141.6	194.7	242.8	208.5	216.7	251.4	256.1	276.3	253.8	177.3	123.9
60,0°	43.7	61.6	90.6	130.2	147.9	219.2	226.1	225.3	242.6	237.9	264.7	259.6	178.8	108.2
62,5°	37.8	51.2	90.4	96.9	123.0	178.6	231.6	216.5	185.9	206.7	220.8	224.5	169.6	100.8
65,0°	33.7	45.9	78.4	90.8	133.0	177.7	193.0	172.8	162.2	126.5	144.3	173.7	169.2	104.9
67,5°	29.2	34.9	51.2	63.7	86.9	112.6	127.1	127.5	110.6	85.5	93.9	136.9	149.6	109.4
70,0°	25.1	27.3	32.9	43.1	50.2	71.6	75.3	79.2	69.2	73.3	67.3	106.1	116.3	92.0
72,5°	21.6	23.1	25.1	26.5	29.6	34.9	49.6	49.8	55.3	58.6	47.1	63.7	63.9	64.7
75,0°	15.9	17.3	20.8	21.4	23.3	25.3	29.6	36.7	39.2	40.6	38.4	38.8	35.7	46.1
77,5°	12.7	13.7	15.7	16.9	18.4	19.8	22.9	23.5	25.5	26.9	29.0	29.0	29.0	24.9
80,0°	9.8	10.6	11.4	12.9	13.9	14.9	16.9	17.1	18.2	19.4	18.4	19.8	20.6	19.0
82,5°	7.3	7.8	8.6	9.2	10.0	10.8	11.8	12.0	12.7	12.9	12.9	13.5	12.7	13.3
85,0°	5.1	5.5	5.9	6.3	6.7	7.1	7.3	7.8	8.0	8.0	8.0	8.2	7.8	8.4
87,5°	2.4	2.7	2.7	2.9	3.1	3.3	3.3	3.5	3.5	3.7	3.7	3.7	3.7	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	196.3	201.2	205.1	209.4	213.6	217.7	220.2	222.6	225.1	228.3	231.0	231.6	232.8	233.0
5,0°	197.7	207.7	214.1	221.2	225.1	230.8	237.5	248.1	261.8	272.0	279.2	286.1	290.2	294.5
7,5°	188.6	200.4	215.3	225.9	236.5	254.7	268.3	283.4	291.4	305.1	324.0	337.3	344.7	341.6
10,0°	181.0	195.7	210.8	228.3	247.5	265.1	294.3	318.7	346.3	370.4	380.4	382.2	387.1	392.6
12,5°	180.2	199.4	216.5	230.2	256.7	277.3	294.3	333.8	357.9	365.9	380.2	399.3	410.4	401.8
15,0°	178.8	196.9	220.8	241.8	257.5	272.0	302.6	323.4	347.5	372.4	387.3	405.1	418.1	426.9
17,5°	176.5	190.4	208.1	227.7	251.6	265.1	297.7	317.7	347.5	377.7	401.4	426.5	459.7	479.3
20,0°	171.8	192.0	212.4	242.2	251.6	282.6	323.0	328.7	367.1	404.0	449.1	469.5	491.2	502.6
22,5°	176.9	196.7	223.2	253.8	276.7	295.7	328.1	351.2	386.3	457.3	492.8	523.0	517.5	522.2
25,0°	173.2	194.7	231.6	270.6	305.9	317.9	341.0	386.3	430.8	472.4	517.7	540.3	552.4	558.7
27,5°	170.6	192.4	237.9	307.5	349.8	368.5	385.3	434.2	475.5	523.2	555.0	566.1	614.4	640.7
30,0°	164.5	183.2	227.9	291.0	380.6	377.3	411.6	476.5	518.7	534.2	565.4	601.8	647.9	649.5
32,5°	158.3	177.7	209.2	265.3	337.5	338.3	409.1	502.0	548.3	579.3	608.3	657.7	686.7	673.8
35,0°	154.9	167.9	187.3	235.3	280.8	327.3	418.7	514.6	594.0	635.8	669.3	716.7	733.4	719.9
37,5°	153.2	162.4	175.9	214.7	269.4	337.1	427.3	508.1	602.4	678.3	729.7	772.4	773.8	741.8
40,0°	147.5	158.1	169.4	202.4	274.3	351.8	456.3	540.1	627.3	693.2	736.9	783.8	768.9	792.2
42,5°	142.6	155.7	168.6	201.2	282.2	373.4	489.3	560.3	625.2	689.7	716.7	754.0	786.8	747.5
45,0°	138.6	149.8	165.7	206.1	280.4	372.4	494.4	555.9	648.9	678.5	729.5	741.1	764.8	757.7
47,5°	135.7	144.1	167.7	204.7	272.8	363.6	474.6	546.1	636.0	674.4	718.9	731.3	744.4	723.6
50,0°	130.0	137.9	169.6	212.8	259.2	340.6	447.3	513.8	596.1	666.5	687.5	716.2	718.5	679.5
52,5°	121.8	129.4	161.0	207.7	256.1	319.1	403.4	493.8	585.6	636.5	659.5	686.0	685.6	657.1
55,0°	114.7	124.5	163.2	222.0	266.7	305.5	382.6	485.3	576.9	597.1	625.4	632.4	641.6	628.3
57,5°	105.1	118.2	150.6	208.5	251.0	309.8	344.9	471.8	528.7	557.5	567.1	608.7	599.9	604.8
60,0°	93.5	107.5	136.5	199.4	237.1	283.8	340.0	425.3	482.8	509.7	537.1	576.9	577.5	596.9
62,5°	82.0	99.2	131.0	174.7	205.1	241.0	303.0	386.5	447.7	442.6	488.7	540.1	557.9	566.9
65,0°	79.0	104.1	152.6	167.7	190.2	208.1	264.9	326.1	376.1	388.1	439.3	497.7	511.0	547.7
67,5°	74.5	97.7	157.1	178.1	165.1	173.2	221.8	271.0	313.2	342.8	391.4	449.1	447.9	486.1
70,0°	73.9	83.3	127.1	166.1	155.3	146.5	179.4	226.9	255.1	291.0	324.2	392.2	401.0	436.5
72,5°	49.2	47.5	83.9	115.3	118.6	116.5	133.0	181.6	190.2	217.5	259.4	302.8	319.4	364.2
75,0°	29.6	31.4	44.3	67.1	85.1	92.6	107.5	128.4	129.2	162.4	216.7	273.2	266.7	250.4
77,5°	24.3	25.3	29.8	42.6	58.8	66.5	79.2	89.8	91.8	116.9	156.5	205.1	193.4	169.0
80,0°	19.0	20.6	21.4	27.1	38.0	43.7	54.9	61.4	64.7	68.4	86.7	98.5	77.7	98.5
82,5°	16.1	15.5	14.5	17.3	23.1	28.4	34.1	39.0	41.6	41.4	41.6	40.0	33.9	35.7
85,0°	10.0	8.4	7.1	8.8	11.6	15.3	17.8	20.0	22.0	21.4	18.8	16.5	14.3	12.7
87,5°	3.1	3.3	2.7	2.9	3.9	4.7	6.1	7.8	7.8	7.3	6.7	6.5	6.5	6.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	235.3	237.7	241.0	242.8	241.6	240.8	237.3	234.9	234.1	227.3	224.3	222.0	219.2	215.1
5,0°	292.2	284.7	280.4	280.2	280.2	280.4	280.2	274.7	261.2	251.2	241.6	235.5	231.8	227.3
7,5°	337.7	334.2	330.8	325.7	320.2	312.2	296.7	285.5	278.1	269.8	260.4	249.4	243.0	238.1
10,0°	385.5	377.7	367.9	353.0	348.1	333.2	317.5	306.5	286.9	273.8	263.6	251.4	241.0	234.9
12,5°	396.5	397.1	389.1	378.3	366.3	341.4	325.9	311.6	287.5	272.0	258.5	244.3	234.1	226.1
15,0°	437.7	454.0	454.0	436.1	415.1	395.9	375.3	348.3	321.0	295.7	281.2	262.4	237.5	219.2
17,5°	496.7	492.8	490.4	468.7	442.0	420.2	394.9	373.0	336.3	298.3	277.9	262.4	241.6	222.0
20,0°	509.9	516.5	499.3	486.7	478.1	451.8	414.0	381.8	342.8	312.6	299.6	269.8	231.2	213.6
22,5°	523.0	528.3	527.7	515.2	495.7	462.8	420.0	388.5	362.2	323.2	287.5	267.9	236.3	212.2
25,0°	591.8	571.6	554.8	525.0	505.0	494.0	474.6	427.1	372.0	328.3	300.6	259.8	224.7	200.8
27,5°	634.2	613.0	576.5	548.5	514.0	496.1	493.6	473.2	423.4	358.5	306.3	262.4	231.8	203.9
30,0°	622.2	609.5	620.1	577.7	564.4	545.0	479.7	439.7	412.4	357.3	304.0	260.6	227.3	200.6
32,5°	661.1	654.6	636.5	603.4	582.8	557.3	500.6	449.1	387.1	353.6	309.4	259.8	229.2	197.9
35,0°	685.4	639.3	638.5	577.9	562.0	492.2	441.8	404.6	361.6	339.8	303.6	254.9	221.0	195.5
37,5°	690.1	660.1	599.9	547.1	498.1	448.7	418.1	403.4	375.7	361.2	333.4	262.4	232.0	194.3
40,0°	724.4	662.4	580.1	520.8	462.0	438.5	417.9	408.5	398.3	366.5	346.7	262.6	226.9	186.3
42,5°	718.5	635.0	558.7	522.4	482.8	445.5	428.3	426.5	425.5	386.5	343.8	274.3	231.8	168.1
45,0°	697.5	603.2	563.4	521.8	490.6	464.6	437.7	435.9	424.2	405.9	333.6	288.9	221.8	144.1
47,5°	654.4	596.5	572.0	528.3	508.9	480.4	448.5	426.1	417.9	405.9	339.1	287.3	203.9	127.5
50,0°	642.0	607.3	586.9	547.7	519.5	489.3	481.0	440.6	418.5	398.9	336.7	268.9	180.6	114.5
52,5°	649.7	628.7	598.9	576.1	546.3	507.7	490.4	441.6	416.3	401.2	318.1	255.7	144.5	101.0
55,0°	618.7	641.6	620.3	597.9	605.4	548.3	494.0	451.2	421.8	390.0	303.2	237.3	111.8	88.4
57,5°	637.3	633.2	630.5	647.5	680.9	614.8	545.7	460.2	400.2	352.8	257.5	196.1	108.2	74.5
60,0°	637.9	649.7	655.0	732.6	722.4	645.4	548.9	436.5	369.8	302.4	219.0	136.9	89.0	64.1
62,5°	635.6	678.1	670.9	781.7	724.4	597.7	529.7	412.4	314.7	244.1	177.1	106.5	70.6	54.5
65,0°	621.4	656.9	717.5	825.4	684.4	539.7	497.1	378.3	282.2	193.2	140.0	86.1	64.9	50.2
67,5°	585.4	600.1	695.6	835.4	648.3	490.6	483.4	368.1	239.2	159.0	108.4	81.0	62.9	43.7
70,0°	510.8	559.9	645.6	745.4	561.4	494.8	476.9	379.3	255.9	158.6	93.5	72.2	52.4	34.7
72,5°	396.5	464.8	568.7	663.8	547.9	489.1	448.3	380.6	275.1	162.2	86.1	61.8	37.5	28.2
75,0°	283.4	345.7	487.3	543.6	476.7	434.2	388.5	315.3	204.5	90.0	57.7	48.4	25.3	22.9
77,5°	172.8	199.0	248.5	275.5	266.1	278.1	224.7	180.8	112.2	64.3	41.6	33.3	20.0	16.7
80,0°	98.7	99.8	99.1	82.4	82.0	96.9	72.4	55.1	47.7	29.0	24.1	21.6	15.9	10.4
82,5°	37.8	41.6	31.6	23.5	21.4	18.4	15.9	14.1	12.2	11.0	9.6	8.4	7.6	6.9
85,0°	12.0	12.0	12.0	12.0	11.4	10.8	9.8	8.8	8.0	6.7	5.9	5.1	4.7	4.3
87,5°	7.1	7.3	7.6	7.6	7.1	6.7	6.1	5.3	3.5	4.1	3.5	3.1	2.7	2.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
Table of values for luminous intensities		Maximum luminous intensity



C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	210.8	209.0	206.3	204.5	201.4	199.4	196.3	192.8	189.2	186.5	184.5	182.6	179.6	177.1
5,0°	223.4	220.8	213.6	205.1	197.3	190.0	184.5	181.4	179.8	179.0	177.5	176.7	174.5	172.4
7,5°	230.6	225.3	219.0	211.6	196.3	190.0	188.3	185.7	179.8	173.2	169.8	174.7	174.3	173.7
10,0°	232.4	227.9	226.7	218.1	198.8	189.8	178.3	171.2	170.2	169.8	170.4	168.8	170.2	165.1
12,5°	220.8	218.1	206.9	202.0	179.8	170.6	164.7	163.7	158.6	158.3	156.1	157.3	152.6	147.7
15,0°	209.4	203.9	196.9	184.5	165.1	159.6	149.0	149.6	148.8	146.5	143.9	143.2	139.8	128.8
17,5°	205.9	191.8	182.0	179.6	172.6	155.1	146.9	141.8	139.2	135.7	129.4	126.7	124.9	121.2
20,0°	199.2	184.9	176.9	171.6	168.8	161.2	151.6	142.4	134.9	126.3	121.4	118.8	119.0	111.0
22,5°	190.8	175.7	161.4	156.7	156.5	152.6	149.4	141.2	134.3	131.0	123.3	118.6	112.8	99.0
25,0°	182.8	165.9	152.6	143.7	138.4	134.1	136.1	132.6	127.7	132.4	124.5	116.3	107.1	97.1
27,5°	177.3	158.8	145.1	136.7	129.6	123.9	119.8	119.4	119.2	122.6	118.4	117.1	108.4	97.3
30,0°	172.8	154.3	142.8	130.8	122.8	115.9	111.0	114.5	116.9	112.2	114.7	114.3	107.5	100.4
32,5°	173.7	150.8	135.5	125.3	115.1	107.3	103.1	105.9	106.1	100.8	106.7	108.2	105.9	103.1
35,0°	165.1	138.8	127.5	113.5	105.5	98.4	94.7	94.3	97.3	92.4	95.5	104.5	105.9	100.8
37,5°	150.6	127.9	116.9	105.3	94.5	87.9	85.7	85.7	87.1	84.1	84.5	97.9	100.8	95.5
40,0°	135.3	116.7	105.9	93.9	84.7	78.2	76.3	78.2	79.8	76.9	77.5	84.9	95.9	90.8
42,5°	129.0	109.8	96.5	84.1	76.3	71.0	70.2	71.2	71.4	70.8	72.6	79.6	91.4	87.3
45,0°	121.2	102.0	90.0	76.9	70.2	66.1	64.9	64.9	65.3	66.3	69.4	73.3	82.8	80.4
47,5°	112.0	97.3	82.6	72.6	65.9	61.6	60.0	60.2	60.2	62.0	67.7	70.0	73.9	74.7
50,0°	100.2	89.4	76.1	66.3	61.4	57.1	55.3	54.5	55.3	56.9	61.8	63.3	68.4	65.7
52,5°	89.6	79.0	67.5	60.8	56.1	52.4	50.0	49.4	50.2	51.8	56.9	55.5	58.8	57.1
55,0°	77.3	68.2	59.6	54.5	51.0	47.7	45.3	44.7	45.3	46.9	49.4	50.8	50.6	52.2
57,5°	64.9	57.3	51.8	48.8	45.9	43.3	40.8	40.4	40.6	41.6	43.7	46.9	45.1	44.1
60,0°	56.1	48.4	45.3	42.4	40.6	38.4	36.7	36.1	36.3	36.9	38.6	41.0	40.8	39.0
62,5°	47.1	41.4	40.0	37.1	35.7	34.1	32.6	32.2	32.0	32.4	33.3	34.5	35.1	34.9
65,0°	40.2	34.7	33.3	32.4	31.2	30.0	29.2	28.6	28.2	28.6	29.0	30.2	30.2	28.4
67,5°	33.5	29.4	28.6	28.0	27.3	26.3	25.9	24.5	24.3	24.5	24.9	25.3	25.3	23.7
70,0°	27.8	24.7	24.1	23.7	23.3	22.9	22.4	21.0	20.8	21.0	21.2	21.8	21.0	20.2
72,5°	23.3	20.2	19.8	19.4	19.6	19.8	19.2	18.2	17.5	17.3	17.3	18.0	17.1	16.3
75,0°	17.8	16.5	15.7	15.5	15.9	16.5	16.3	15.1	14.7	14.3	14.1	14.1	13.5	13.3
77,5°	13.3	12.7	12.0	12.0	12.9	13.3	13.3	12.0	11.4	11.2	11.2	10.8	10.4	10.2
80,0°	9.6	9.2	8.8	8.8	9.4	10.0	9.8	9.2	8.6	8.4	8.4	8.0	7.3	6.7
82,5°	6.5	6.3	5.9	5.9	6.1	6.3	6.7	6.3	5.7	5.5	5.7	5.5	4.7	3.5
85,0°	3.9	3.7	3.5	3.5	3.3	3.3	3.3	3.3	3.3	3.3	2.7	2.9	2.9	2.4
87,5°	2.0	1.8	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.2	1.0	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	176.7	177.9	178.8	179.6	179.6	180.4	180.4	178.3	175.3	172.8	170.6	169.8	169.8	169.2
5,0°	170.2	169.2	169.0	168.1	167.7	165.1	156.1	148.4	142.8	140.0	138.4	137.9	136.3	135.3
7,5°	173.0	168.1	159.8	151.8	140.4	129.6	126.3	125.3	124.9	121.2	120.2	119.6	118.8	117.1
10,0°	159.6	156.3	147.7	130.6	124.9	122.6	120.8	116.9	112.6	109.6	108.8	107.7	106.7	106.7
12,5°	141.2	137.7	129.4	120.6	116.5	106.7	102.8	100.4	100.4	99.2	96.7	99.0	101.6	105.1
15,0°	124.9	119.6	110.4	103.3	90.2	87.7	85.9	85.1	85.9	88.2	92.6	98.6	103.9	108.8
17,5°	111.8	100.6	88.6	78.8	75.7	75.7	75.3	76.7	80.4	86.5	93.5	100.2	107.7	114.5
20,0°	94.3	84.3	77.5	72.6	69.4	67.7	69.0	72.4	77.7	84.7	92.4	101.2	110.4	119.2
22,5°	90.2	79.2	70.6	69.0	65.7	65.3	65.3	68.2	73.7	81.0	90.8	100.2	110.6	121.6
25,0°	86.7	76.1	71.6	69.4	65.3	62.6	62.0	63.7	69.2	77.3	86.9	97.3	108.6	121.8
27,5°	88.4	77.5	71.8	70.0	67.3	61.2	57.1	59.8	65.1	73.1	82.0	91.0	103.5	120.2
30,0°	89.6	77.7	73.5	71.0	66.5	59.8	56.9	57.5	61.4	71.8	78.4	84.7	96.1	110.8
32,5°	92.8	76.3	72.8	68.0	63.5	59.8	58.2	58.2	59.2	63.9	70.8	79.4	88.4	104.5
35,0°	86.7	75.9	71.6	63.9	63.5	60.4	60.4	58.8	57.5	58.2	64.5	77.5	81.8	98.4
37,5°	82.4	78.8	72.0	64.5	62.4	60.8	61.4	63.5	57.7	53.7	56.5	66.1	77.1	89.4
40,0°	81.4	77.3	73.3	66.7	61.8	58.2	58.0	60.8	58.4	53.3	55.3	60.8	76.9	79.8
42,5°	78.6	70.8	71.6	65.3	61.4	58.8	57.1	58.4	62.4	64.3	56.9	58.2	68.2	76.5
45,0°	71.0	65.9	65.1	59.6	59.0	58.0	55.7	58.4	68.0	68.4	52.2	51.8	59.2	67.7
47,5°	65.3	61.4	58.8	56.3	53.1	48.6	58.2	68.4	68.2	57.5	50.0	48.0	51.2	64.7
50,0°	58.6	59.4	55.1	52.2	49.6	52.4	66.3	81.4	61.0	48.4	42.9	37.1	42.4	51.4
52,5°	51.4	53.3	50.6	48.4	47.3	61.0	74.9	66.1	48.4	40.6	34.9	31.8	40.6	43.5
55,0°	44.7	46.5	45.3	44.1	55.1	71.4	65.9	56.3	40.4	31.6	31.2	34.1	39.8	38.6
57,5°	39.8	39.8	39.2	40.4	46.7	51.8	49.0	41.4	34.7	29.4	28.0	30.0	33.5	31.4
60,0°	34.7	34.1	34.1	33.9	35.5	33.5	32.4	32.0	30.0	29.2	26.5	25.3	25.7	29.2
62,5°	30.2	29.2	28.8	29.2	26.5	25.1	25.3	23.3	23.7	22.9	23.9	22.2	21.6	23.7
65,0°	26.7	26.3	24.3	24.3	23.5	22.2	20.8	21.4	20.2	19.8	21.4	19.6	20.2	21.4
67,5°	23.5	22.7	22.0	21.2	21.0	19.0	19.2	18.6	17.8	17.8	22.0	18.6	19.2	20.0
70,0°	19.4	19.6	19.2	18.4	17.5	16.7	16.1	15.9	15.9	16.5	19.8	17.5	18.0	18.6
72,5°	16.1	16.3	16.1	15.1	14.7	14.5	14.1	14.1	14.3	14.9	15.9	15.7	15.9	16.3
75,0°	13.1	13.3	13.3	12.4	12.4	12.2	12.2	12.2	12.4	12.9	13.3	13.5	13.9	14.1
77,5°	10.0	10.6	10.6	10.0	10.0	10.0	10.0	10.0	10.2	10.6	10.8	11.0	11.2	11.4
80,0°	7.1	7.8	8.0	7.6	7.6	7.6	7.6	7.8	8.0	8.2	8.4	8.6	8.6	8.8
82,5°	4.5	5.7	5.3	5.3	5.3	5.5	5.7	5.7	5.9	6.1	6.1	6.3	6.5	6.7
85,0°	2.9	3.1	3.3	3.3	3.5	3.7	3.9	4.1	4.1	4.3	4.5	4.5	4.5	4.7
87,5°	1.2	1.4	1.6	1.8	2.0	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
--	--	-------------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd/km		Luminous flux in lm/klm		
0,0°	200.4	200.4	0.3	0.3
2,5°	168.6	167.9	2.4	2.7
5,0°	134.5	133.7	4.8	7.5
7,5°	115.3	113.5	7.3	14.8
10,0°	107.3	107.3	9.9	24.7
12,5°	107.5	110.2	12.2	36.9
15,0°	113.3	116.7	14.9	51.8
17,5°	120.8	125.5	17.6	69.4
20,0°	127.5	134.1	20.6	90.0
22,5°	132.2	140.8	23.7	113.6
25,0°	134.3	144.7	27.0	140.6
27,5°	132.0	142.8	30.9	171.5
30,0°	125.5	138.6	33.9	205.4
32,5°	125.1	135.7	36.8	242.2
35,0°	115.9	126.9	38.9	281.1
37,5°	109.4	122.2	41.1	322.3
40,0°	97.1	109.0	43.3	365.6
42,5°	87.7	103.3	45.3	410.9
45,0°	76.1	92.0	46.9	457.9
47,5°	65.9	80.0	47.9	505.7
50,0°	57.1	70.6	48.6	554.3
52,5°	48.8	56.9	49.2	603.5
55,0°	44.5	51.0	49.8	653.4
57,5°	36.1	44.3	49.8	703.1
60,0°	30.6	36.9	48.9	752.0
62,5°	25.9	31.8	46.3	798.4
65,0°	23.5	27.5	43.5	841.8
67,5°	21.2	23.5	39.4	881.2
70,0°	19.2	20.4	35.2	916.3
72,5°	16.7	17.5	29.9	946.3
75,0°	14.5	15.1	23.8	970.0
77,5°	11.6	12.0	15.3	985.4
80,0°	9.0	9.4	7.8	993.2
82,5°	6.7	6.9	3.8	997.0
85,0°	4.7	4.9	2.0	999.1
87,5°	2.4	2.4	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3E21Y08ME EAN: 4058352856444	LP number 58931_198
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12730	122.8	130.2	126.5
95	241	252	12078	115.2	122.1	118.6
90	229	250	11477	108.3	114.8	111.6
85	216	248	10826	101.1	107.1	104.1
80	203	246	10174	94.1	99.7	96.9
75	190	243	9522	87.3	92.5	89.9
70	178	241	8921	81.2	86.0	83.6
65	165	238	8269	74.6	79.0	76.8
60	152	235	7618	68.2	72.2	70.2
55	140	232	7017	62.4	66.0	64.2
50	127	229	6365	56.0	59.4	57.7
45	114	225	5713	49.9	52.9	51.4
40	102	221	5112	44.4	47.0	45.7
35	89	216	4461	38.6	40.8	39.7
30	76	210	3809	32.9	34.6	33.8
25	63	203	3157	27.2	28.7	28.0
20	51	195	2556	22.0	23.3	22.6
15	38	184	1904	16.6	17.5	17.0
13	33	179	1654	14.7	15.3	15.0