

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
	Version post-top or side-entry mounting, Smart Interface up/down Optic asymmetric, wide distribution (ST1.0a G) Cover toughened safety glass Lamps LED 2200 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 9000 lm Power consumption = 72.5 W Luminous efficacy = 124.1 lm/W	serial documentation 09.08.2023

Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 489 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	461.5
Imax 80°	96.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032


Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2D21Y08JB
EAN: 4058352923283

LP number
59078_229

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

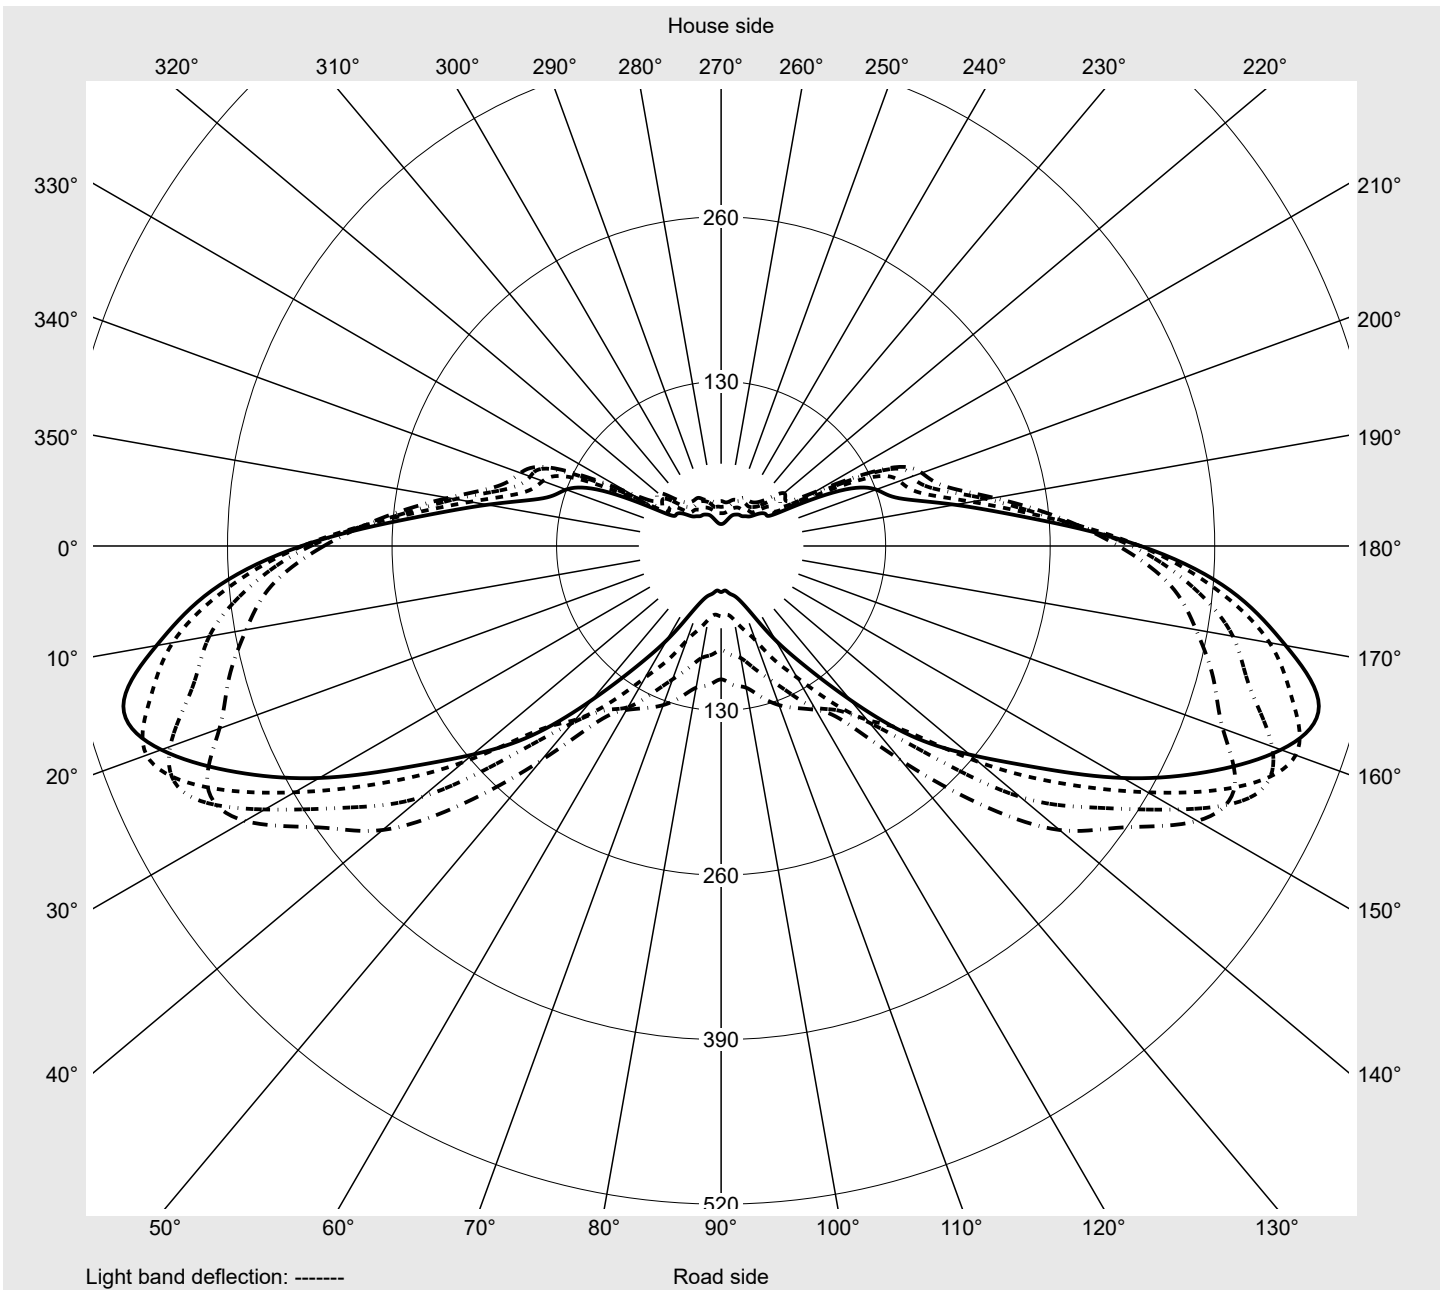

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	277.0	276.4	275.2	274.5	273.0	273.7	272.9	273.0	271.2	271.2	271.1	271.2	271.4
5,0°	274.1	274.0	274.4	271.9	270.1	269.9	268.3	270.2	270.2	270.8	270.6	270.2	268.6
7,5°	279.4	277.3	274.8	274.9	272.6	273.0	273.3	271.7	269.4	269.4	269.0	268.1	269.4
10,0°	280.5	276.6	274.8	277.0	280.8	278.6	272.2	269.6	269.1	273.3	273.9	275.3	275.6
12,5°	289.2	286.8	282.7	281.0	277.9	277.4	280.6	282.2	279.8	279.6	278.5	279.4	279.1
15,0°	288.1	289.0	288.6	282.0	281.9	284.6	284.1	287.9	291.2	290.4	290.4	287.4	286.6
17,5°	286.5	287.8	285.5	285.9	286.0	290.2	291.3	295.8	292.3	291.9	293.7	291.6	289.1
20,0°	291.5	292.4	288.6	292.7	293.0	298.5	297.4	298.5	297.9	297.2	297.4	296.1	295.5
22,5°	294.2	287.4	289.6	295.1	298.6	301.7	301.5	304.4	301.6	303.0	304.1	302.2	302.9
25,0°	290.1	291.1	297.6	301.1	304.1	306.9	304.1	310.9	311.8	314.8	310.7	306.6	305.0
27,5°	287.5	292.3	300.5	303.1	307.5	314.6	310.4	317.0	314.8	313.0	306.9	305.5	309.4
30,0°	292.0	294.2	306.8	308.2	318.6	321.3	321.7	325.9	317.9	312.7	313.6	314.2	314.2
32,5°	296.6	303.4	310.5	316.2	324.8	328.0	325.1	324.3	321.7	320.6	319.3	318.8	318.9
35,0°	293.7	307.9	314.0	322.5	330.7	330.2	333.2	331.9	324.2	323.3	323.9	327.2	329.1
37,5°	303.1	313.9	324.1	334.6	336.2	339.9	336.6	332.6	330.2	336.0	331.7	335.5	336.0
40,0°	308.1	323.2	333.3	337.1	341.8	344.1	345.3	335.2	345.8	340.1	337.1	341.4	336.8
42,5°	310.4	331.9	338.8	346.6	352.2	343.4	360.7	346.8	357.8	348.2	345.1	344.2	337.4
45,0°	314.3	336.1	345.1	351.3	352.5	350.5	355.5	355.4	363.9	365.9	352.7	349.6	341.3
47,5°	314.4	339.7	350.1	358.2	355.5	358.5	354.9	364.8	369.6	371.3	360.1	351.7	330.9
50,0°	313.6	338.4	355.7	357.1	362.9	365.7	359.9	376.6	390.1	379.0	360.1	337.0	305.4
52,5°	310.1	339.8	351.2	364.1	368.6	376.4	380.3	400.7	411.0	378.8	346.4	308.8	268.0
55,0°	309.7	336.3	357.1	363.3	377.6	395.3	407.2	415.4	395.9	359.4	318.0	267.3	223.8
57,5°	310.0	338.2	361.6	380.5	390.8	408.7	436.4	415.4	373.0	331.3	278.8	218.4	176.1
60,0°	313.9	356.4	381.1	402.5	421.8	447.8	434.4	387.7	349.1	287.7	221.2	169.0	149.6
62,5°	324.3	374.3	410.6	432.6	463.2	465.3	416.3	360.4	308.4	234.2	182.3	158.2	147.0
65,0°	330.8	392.8	440.0	467.1	483.1	450.2	389.2	326.5	265.4	207.0	179.3	149.5	120.1
67,5°	331.5	403.9	453.0	489.0	470.7	422.7	366.6	305.3	256.5	211.8	158.8	115.9	86.0
70,0°	323.2	394.9	447.7	461.5	422.9	385.2	351.0	344.3	283.9	188.9	118.3	74.2	48.5
72,5°	316.1	359.3	401.7	388.4	373.1	363.3	394.6	409.8	286.0	144.6	69.3	39.5	28.1
75,0°	244.1	257.5	289.2	299.7	316.8	366.8	438.0	374.9	196.5	72.3	32.2	23.3	21.1
77,5°	127.1	147.2	181.9	217.4	238.2	288.7	316.5	219.1	70.5	28.0	20.6	17.9	17.0
80,0°	33.5	53.0	71.3	80.0	84.1	96.1	90.3	66.5	20.1	17.3	16.8	12.6	12.6
82,5°	6.2	9.7	17.5	24.9	29.9	37.4	35.4	17.1	10.8	10.9	11.3	8.2	8.1
85,0°	1.2	1.4	2.0	2.7	3.3	4.8	5.6	4.1	4.1	4.6	5.2	4.0	3.9
87,5°	0.3	0.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1	1.2	1.5	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5
2,5°	271.5	272.2	271.7	270.4	271.3	272.5	277.7	275.7	275.6	274.8	274.5	271.8	269.8
5,0°	268.1	267.6	267.2	266.5	266.4	264.7	276.0	275.8	273.8	271.3	270.7	265.9	261.6
7,5°	270.3	271.6	268.7	269.2	266.8	266.3	278.8	275.9	273.3	272.2	266.5	262.4	258.5
10,0°	279.4	277.9	273.7	272.9	271.2	273.0	280.7	276.5	269.2	264.4	259.9	255.3	249.5
12,5°	278.6	280.8	279.4	279.3	278.5	273.8	288.2	284.0	274.9	264.3	256.9	253.0	246.5
15,0°	285.1	284.0	283.9	287.7	288.0	286.1	289.0	286.8	275.9	263.3	253.3	246.3	239.9
17,5°	290.0	288.1	290.0	288.8	291.7	294.1	287.2	284.3	275.6	258.5	253.6	241.8	228.9
20,0°	293.4	292.3	296.4	290.0	290.0	292.8	293.7	285.3	273.7	258.3	246.8	237.9	222.9
22,5°	298.9	295.2	298.5	293.0	293.5	293.4	291.1	289.6	273.2	253.8	240.0	225.4	215.1
25,0°	303.5	300.9	298.5	297.3	296.1	297.7	289.2	283.4	273.0	251.9	234.0	219.6	206.1
27,5°	304.9	305.2	302.5	301.1	299.3	305.5	291.3	285.0	274.1	248.8	231.4	212.9	194.9
30,0°	312.7	305.3	305.5	302.9	307.6	302.7	288.7	284.3	265.7	245.1	225.0	207.3	188.4
32,5°	319.2	313.3	310.5	312.2	306.2	306.2	283.1	279.6	263.4	240.9	219.4	196.1	184.6
35,0°	323.5	319.3	312.4	309.8	305.1	299.3	286.6	274.8	263.2	233.8	209.8	191.2	183.1
37,5°	329.9	320.0	318.1	311.8	303.1	304.5	285.3	273.8	256.8	228.8	203.4	183.6	178.0
40,0°	326.8	319.2	316.0	314.5	307.7	304.6	283.4	268.2	254.7	221.7	195.2	181.8	177.4
42,5°	328.9	324.7	313.0	313.8	302.9	300.2	281.7	262.2	243.7	213.5	188.7	181.1	170.7
45,0°	329.9	314.5	297.4	287.6	275.9	276.6	282.8	256.2	236.6	207.6	182.1	178.0	160.5
47,5°	308.8	280.5	261.8	246.2	234.1	234.1	281.8	246.6	228.8	198.6	177.3	171.6	143.5
50,0°	269.9	239.9	221.1	206.5	191.4	192.8	272.7	241.8	218.0	191.2	173.4	161.4	125.2
52,5°	227.6	201.2	180.4	164.6	155.8	152.3	269.6	232.4	205.8	183.3	167.5	141.2	105.0
55,0°	184.5	161.5	142.3	135.6	131.5	128.0	268.2	229.8	198.7	172.6	162.6	121.1	89.1
57,5°	150.6	141.1	134.8	129.7	120.0	120.9	267.6	224.3	189.9	170.2	151.9	105.1	75.3
60,0°	141.3	133.7	123.7	113.7	110.2	105.4	266.2	219.0	182.8	168.7	145.2	84.3	62.4
62,5°	128.2	112.1	99.9	90.0	86.2	82.4	261.4	213.3	174.7	160.5	141.7	72.1	56.8
65,0°	99.2	79.4	68.2	59.3	54.4	55.5	258.5	201.1	162.6	150.0	126.5	62.8	50.1
67,5°	61.3	47.3	40.9	38.1	35.3	36.4	247.6	187.6	145.7	130.3	103.1	53.3	43.3
70,0°	35.3	31.8	30.3	27.9	27.8	26.8	240.7	174.2	128.1	108.1	85.0	47.0	35.7
72,5°	25.9	25.3	24.5	22.6	23.1	21.7	230.1	158.9	112.6	89.8	64.6	36.7	31.7
75,0°	20.7	20.5	19.8	18.7	18.3	18.0	194.3	130.2	78.9	63.6	43.0	28.7	26.2
77,5°	16.6	16.2	15.3	14.6	14.3	14.6	118.7	58.0	20.8	29.3	25.7	17.5	17.8
80,0°	11.9	12.1	11.0	10.7	10.4	10.4	32.3	9.7	6.1	12.2	12.9	9.1	9.1
82,5°	8.0	7.6	7.6	7.4	6.9	6.2	5.0	2.7	2.9	3.9	4.1	3.0	1.6
85,0°	3.7	4.1	4.1	3.7	3.3	3.0	1.2	1.0	1.0	0.7	0.6	0.5	0.2
87,5°	1.1	1.3	1.2	1.1	1.0	1.0	0.3	0.2	0.2	0.2	0.1	0.1	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	272.5	0.4	0.4
2,5°	268.5	268.9	268.2	267.9	268.1	267.2	267.4	267.3	267.8	267.2	267.4	3.2	3.7
5,0°	258.3	254.5	252.2	250.1	250.6	249.2	250.4	252.1	254.6	253.9	255.1	6.3	10.0
7,5°	253.2	249.6	246.9	243.4	241.8	240.1	238.5	238.0	237.2	236.5	235.9	9.4	19.4
10,0°	246.6	241.3	236.8	232.4	231.2	227.8	225.6	222.2	220.8	221.0	221.4	12.4	31.8
12,5°	242.7	233.6	227.3	222.1	217.3	215.3	212.9	212.5	209.4	207.8	209.0	15.4	47.2
15,0°	233.0	224.6	215.3	210.9	206.2	200.4	196.3	196.0	195.2	190.0	189.7	18.4	65.6
17,5°	223.4	215.6	205.0	198.1	192.0	188.0	182.3	180.3	179.7	177.1	177.0	21.1	86.7
20,0°	214.7	202.7	194.1	186.2	181.6	179.9	175.0	171.4	172.3	169.2	166.4	23.9	110.6
22,5°	204.1	193.6	184.4	178.0	171.6	170.7	170.7	168.1	164.5	164.2	163.2	26.7	137.3
25,0°	189.5	182.2	178.9	173.9	167.7	164.7	164.2	162.4	163.3	162.0	159.6	29.4	166.7
27,5°	186.1	181.6	171.6	167.3	164.1	158.7	157.7	154.0	150.5	149.0	147.0	32.0	198.7
30,0°	181.3	178.3	168.4	164.0	159.7	154.5	144.9	141.4	133.3	128.4	127.6	34.5	233.3
32,5°	177.7	168.8	163.3	159.4	151.2	146.4	135.1	123.5	114.9	107.7	107.0	36.9	270.1
35,0°	178.3	165.2	156.5	148.1	142.4	131.6	119.3	106.1	96.7	90.9	87.8	39.0	309.1
37,5°	171.2	159.1	148.6	141.6	129.9	113.6	100.4	89.5	80.3	75.0	73.4	41.2	350.3
40,0°	161.1	148.6	139.0	131.3	114.8	96.2	81.8	73.1	68.4	65.6	64.8	43.1	393.4
42,5°	151.2	140.3	126.0	117.4	100.5	81.3	70.4	66.6	62.3	61.2	60.6	45.0	438.4
45,0°	137.4	125.8	116.7	102.3	84.9	69.6	62.1	58.5	57.5	58.4	58.8	46.2	484.6
47,5°	122.6	111.6	104.9	87.4	70.5	62.3	56.9	55.3	55.3	54.1	55.2	46.5	531.1
50,0°	105.9	101.5	94.5	74.3	62.2	56.1	53.6	51.7	51.0	50.8	49.9	46.3	577.4
52,5°	92.1	89.6	74.0	62.8	54.7	52.6	50.1	48.1	46.4	46.3	45.2	45.6	623.0
55,0°	80.1	75.2	59.7	53.1	49.2	47.3	46.2	43.5	42.4	41.7	40.8	44.6	667.6
57,5°	72.2	65.6	52.2	46.3	45.2	44.5	42.2	40.0	38.3	37.8	37.8	43.9	711.6
60,0°	64.9	53.5	45.3	42.3	42.0	42.0	39.0	37.8	35.5	34.7	35.5	43.4	755.0
62,5°	58.2	46.5	40.2	38.0	38.7	38.9	37.6	35.3	31.6	31.2	30.9	42.7	797.7
65,0°	48.5	38.6	35.4	35.0	33.2	33.2	32.2	30.1	27.6	26.1	25.9	41.1	838.8
67,5°	40.0	33.3	30.7	28.8	28.4	27.4	25.8	22.4	19.4	17.8	17.3	38.7	877.5
70,0°	33.9	28.1	26.6	25.0	23.5	19.0	16.2	11.9	9.1	7.5	6.5	36.0	913.6
72,5°	26.8	22.8	22.0	19.8	14.7	10.1	6.8	4.3	3.5	3.1	3.2	33.2	946.7
75,0°	21.1	16.5	14.5	11.7	7.0	3.9	2.7	1.7	1.5	1.6	1.9	27.1	973.8
77,5°	13.6	9.9	6.4	3.8	2.2	1.3	1.2	0.7	0.6	0.8	1.1	17.1	991.0
80,0°	5.6	2.8	1.3	0.3	0.4	0.2	0.2	0.3	0.2	0.3	0.5	6.1	997.1
82,5°	0.8	0.2	0.1	0.0	0.0	0.0	0.0	0.1	0.0	0.1	0.1	2.2	999.3
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.6	999.9
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9000	72.5	75.7	74.1
95	241	252	8539	67.9	70.8	69.4
90	229	250	8114	63.8	66.5	65.2
85	216	248	7654	59.4	61.9	60.6
80	203	246	7193	55.2	57.5	56.4
75	190	243	6732	51.1	53.2	52.2
70	178	241	6307	47.4	49.4	48.4
65	165	238	5846	43.5	45.2	44.4
60	152	235	5386	39.7	41.2	40.4
55	140	232	4961	36.3	37.7	37.0
50	127	229	4500	32.7	33.9	33.3
45	114	225	4039	29.2	30.3	29.8
40	102	221	3614	25.9	26.9	26.4
35	89	216	3154	22.6	23.5	23.0
30	76	210	2693	19.4	20.1	19.8
25	63	203	2232	16.3	16.9	16.6
20	51	195	1807	13.4	13.9	13.6
15	38	184	1346	10.4	10.7	10.6
10	25	169	886	7.1	7.4	7.2

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9000	71.2	73.0	72.1
95	241	252	8539	66.8	68.5	67.6
90	229	250	8114	62.8	64.4	63.6
85	216	248	7653	58.7	60.2	59.4
80	203	246	7193	54.6	55.9	55.2
75	191	244	6767	50.9	52.2	51.6
70	178	241	6307	47.0	48.2	47.6
65	165	238	5846	43.2	44.3	43.8
60	152	235	5386	39.5	40.5	40.0
55	140	232	4960	36.1	37.0	36.6
50	127	229	4500	32.6	33.3	33.0
45	114	225	4039	29.1	29.8	29.4
40	102	221	3614	26.0	26.5	26.2
35	89	216	3153	22.7	23.2	23.0
30	76	210	2693	19.5	19.9	19.7
25	64	204	2268	16.5	16.9	16.7
20	51	195	1807	13.5	13.7	13.6
15	38	184	1346	10.4	10.6	10.5
10	25	169	886	7.2	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9000	71.7	74.8	73.2
95	241	252	8539	67.3	70.1	68.7
90	229	250	8114	63.2	65.8	64.5
85	216	248	7654	59.0	61.4	60.2
80	203	246	7193	54.8	57.0	55.9
75	191	244	6768	51.1	53.1	52.1
70	178	241	6307	47.1	49.0	48.0
65	165	238	5846	43.3	45.1	44.2
60	152	235	5386	39.5	41.1	40.3
55	140	232	4961	36.1	37.6	36.8
50	127	229	4500	32.6	33.8	33.2
45	114	225	4039	29.1	30.2	29.6
40	102	221	3614	25.9	26.9	26.4
35	89	216	3154	22.6	23.4	23.0
30	76	210	2693	19.4	20.1	19.8
25	64	204	2268	16.5	17.1	16.8
20	51	195	1807	13.4	13.9	13.6
15	38	184	1346	10.4	10.7	10.6
10	25	169	886	7.1	7.3	7.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2D21Y08JB EAN: 4058352923283	LP number 59078_229
--	--	--------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	9000.0	72.5
5.0	9000.0	71.2
15.0	9000.0	71.7