


## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, wide distribution (ST1.5a) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 9580 lm Power consumption = 71.0 W Luminous efficacy = 134.9 lm/W	<b>serial documentation</b> <b>09.08.2023</b>

**Luminous intensity in cd/klm** C180-0 C215-35 C217,5-37,5 C270-90 **Imax: 1158 cd/klm**

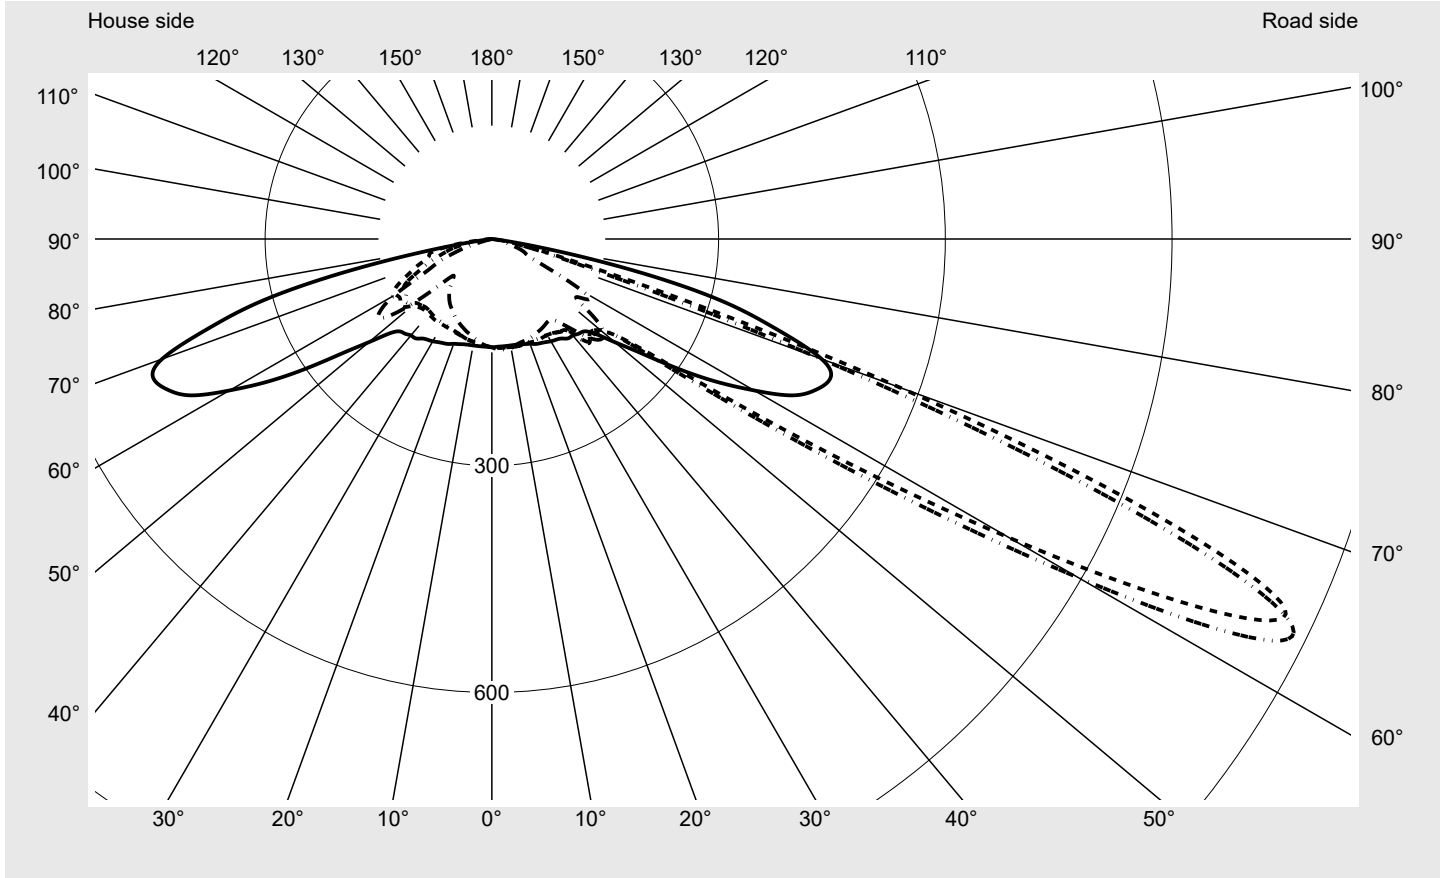

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	798.1
Imax 80°	214.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> 59337_590
--	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 65°**    **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**      **siteco**



## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.8	142.8	142.8	142.9	143.1	143.1	143.1	143.2	143.3	143.4	143.5	143.6	143.7	143.8	143.9
5,0°	142.7	142.9	143.0	143.1	143.3	143.5	143.6	143.7	143.9	143.9	144.0	144.1	144.2	144.3	144.4
7,5°	142.8	143.0	143.2	143.4	143.5	143.7	143.9	143.9	144.1	144.1	144.2	144.3	144.3	144.4	144.5
10,0°	143.0	143.3	143.5	143.6	143.9	144.0	144.0	144.1	144.2	144.3	144.4	144.5	144.7	144.8	145.1
12,5°	143.4	143.6	143.9	144.1	144.3	144.4	144.4	144.4	144.5	144.7	144.9	145.1	145.3	145.5	145.6
15,0°	144.2	144.5	144.8	144.9	145.1	145.1	145.1	145.2	145.4	145.6	145.7	146.0	146.0	146.1	146.1
17,5°	145.8	146.0	146.1	146.2	146.1	146.1	146.3	146.6	146.9	147.3	147.5	147.4	147.2	146.6	146.1
20,0°	147.6	147.9	147.9	147.8	147.6	147.5	148.0	148.5	149.0	149.4	149.3	149.1	148.4	147.2	145.9
22,5°	150.4	150.6	150.6	150.3	149.8	149.8	150.4	151.2	151.9	152.3	152.2	151.2	150.0	148.4	146.5
25,0°	152.1	152.6	152.7	152.4	151.8	151.8	152.5	153.5	154.3	154.7	154.1	152.8	151.0	149.1	147.2
27,5°	153.8	154.4	154.7	154.3	153.6	153.6	154.1	154.9	155.5	155.5	154.3	152.3	150.0	148.0	146.5
30,0°	156.3	157.0	157.4	156.8	155.7	155.5	155.7	156.0	156.0	155.2	153.4	151.2	149.2	147.9	147.1
32,5°	158.1	158.9	159.8	158.7	157.2	156.8	156.8	156.5	155.9	154.8	153.4	151.9	150.7	149.5	148.5
35,0°	160.7	161.8	162.6	162.2	160.9	160.1	159.4	158.7	158.1	157.0	155.7	154.5	153.2	152.0	151.0
37,5°	165.7	166.1	166.2	165.4	165.0	164.2	162.8	161.5	160.7	160.4	159.8	158.2	156.6	154.8	153.7
40,0°	166.6	168.0	168.8	167.7	167.3	166.7	165.5	164.1	163.2	162.3	161.4	160.3	159.5	159.1	159.4
42,5°	170.0	170.9	171.8	172.1	171.9	171.0	169.4	168.2	166.9	166.4	165.8	167.1	170.6	177.0	183.4
45,0°	172.8	175.4	177.0	177.0	176.3	174.8	173.5	173.2	174.0	177.6	181.1	184.0	186.0	187.8	186.7
47,5°	185.7	187.3	190.2	192.0	190.4	188.4	189.3	191.3	193.7	195.3	194.9	193.8	191.8	189.0	185.1
50,0°	212.4	217.2	220.2	221.6	222.5	223.0	223.3	222.1	219.2	214.6	208.3	202.9	198.2	194.4	191.1
52,5°	247.1	249.7	251.8	252.7	252.4	251.7	249.9	246.8	241.4	234.4	227.7	220.9	214.7	212.4	214.2
55,0°	297.3	297.7	296.4	295.8	295.4	294.0	291.1	286.7	281.1	274.7	268.6	263.1	262.8	276.5	308.0
57,5°	350.8	343.8	339.4	337.4	336.8	335.2	333.3	332.0	332.2	335.9	345.9	367.3	403.6	458.5	522.3
60,0°	400.7	393.9	388.9	388.3	391.7	393.1	394.0	398.8	409.1	433.6	481.3	545.9	610.9	689.2	790.7
62,5°	448.1	436.0	433.8	435.8	444.3	452.1	463.5	487.0	523.4	578.3	647.3	725.1	813.3	924.2	1055.4
65,0°	472.5	462.3	461.7	467.0	482.8	501.3	531.4	575.9	629.5	700.3	778.1	870.7	989.9	1101.5	1157.9
67,5°	484.2	471.1	471.3	481.5	504.1	534.5	585.0	642.0	703.7	780.6	869.3	953.0	995.9	986.1	943.8
70,0°	464.4	449.7	450.7	467.4	493.7	530.1	578.7	634.7	700.5	767.2	798.1	784.8	735.5	664.7	573.7
72,5°	392.8	388.4	393.0	413.7	440.2	469.5	503.0	541.4	565.4	566.1	534.9	483.8	414.8	333.4	252.8
75,0°	312.1	307.6	313.3	327.7	348.5	372.0	389.6	388.5	368.3	332.7	294.3	244.7	190.7	137.0	105.3
77,5°	189.9	195.2	198.5	206.5	221.1	230.8	229.7	213.5	188.8	161.7	132.1	99.8	74.0	60.2	51.1
80,0°	70.3	62.4	59.0	57.6	57.7	62.9	73.3	71.0	58.9	47.0	36.3	30.1	27.5	25.5	23.4
82,5°	14.9	14.1	13.5	13.4	13.9	14.7	15.6	15.7	14.3	11.7	10.5	10.4	10.5	10.5	10.1
85,0°	4.1	4.1	4.0	4.1	4.1	4.1	4.2	4.2	4.1	4.1	4.1	4.0	4.0	3.9	3.8
87,5°	2.1	2.1	2.1	2.2	2.2	2.2	2.1	2.1	2.1	2.0	1.9	1.9	1.9	1.8	1.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	144.1	144.2	144.3	144.4	144.4	144.6	144.8	144.9	145.0	145.1	145.1	145.2	145.2	145.2	145.3
5,0°	144.5	144.7	144.8	144.9	144.9	145.1	145.2	145.4	145.6	145.6	145.7	145.8	145.9	146.0	146.1
7,5°	144.7	144.9	145.1	145.2	145.4	145.6	145.8	146.1	146.2	146.5	146.7	146.8	146.9	147.0	147.1
10,0°	145.2	145.5	145.7	145.9	146.1	146.2	146.3	146.5	146.6	146.7	146.7	146.7	146.6	146.6	146.5
12,5°	145.7	145.9	146.1	146.1	146.1	146.0	146.0	145.9	145.6	145.4	145.2	145.0	144.8	144.7	144.6
15,0°	146.1	145.9	145.6	145.1	144.7	144.3	144.0	143.8	143.5	143.3	143.0	142.7	142.5	142.4	142.3
17,5°	145.3	144.7	144.1	143.4	142.7	142.2	141.7	141.5	141.3	141.2	141.2	141.0	141.0	140.9	141.0
20,0°	144.5	143.3	142.3	141.7	141.2	140.9	140.5	140.5	140.3	140.4	140.3	140.3	140.3	140.4	140.3
22,5°	144.7	143.2	142.2	141.4	140.9	140.6	140.5	140.3	140.1	140.1	140.1	140.1	140.1	140.0	140.0
25,0°	145.3	143.8	142.6	141.9	141.4	141.1	140.9	140.7	140.4	140.1	139.9	139.6	139.2	139.0	138.7
27,5°	145.4	144.7	144.0	143.4	142.6	142.1	141.4	140.8	140.1	139.5	138.8	138.3	138.0	137.7	137.4
30,0°	146.6	146.3	146.1	145.6	144.4	143.1	141.8	140.7	139.7	138.9	138.3	137.6	137.1	136.7	136.2
32,5°	147.9	148.3	149.4	149.2	147.7	145.3	143.3	141.7	140.4	139.2	138.3	137.2	136.3	135.5	134.8
35,0°	150.4	150.2	150.8	151.6	149.9	147.1	144.6	142.5	140.6	139.0	137.8	136.6	135.8	134.9	134.1
37,5°	152.8	151.9	150.7	149.7	150.1	149.1	146.8	143.8	141.6	139.8	138.4	136.9	135.7	134.7	134.1
40,0°	161.0	164.5	168.6	171.3	172.7	172.2	170.1	166.1	160.9	154.8	148.7	143.6	140.7	139.7	140.2
42,5°	186.8	187.3	186.7	184.0	179.0	173.8	170.0	166.2	161.1	157.4	154.7	152.9	152.7	153.8	155.1
45,0°	182.8	178.9	174.1	169.8	166.6	164.1	163.1	163.3	163.6	164.9	166.2	167.6	169.7	172.0	174.0
47,5°	180.0	176.2	173.4	171.2	170.1	170.8	172.0	175.4	179.8	184.3	187.4	189.6	191.8	193.5	194.1
50,0°	187.5	185.2	183.9	184.0	187.3	192.4	199.0	205.3	210.0	214.2	216.3	214.8	212.0	209.8	207.2
52,5°	218.8	227.2	239.6	251.9	261.3	267.0	266.2	261.5	253.9	247.3	244.9	235.9	226.3	216.2	206.7
55,0°	351.2	391.6	419.1	432.1	429.9	408.9	375.3	339.6	313.6	292.8	274.7	252.0	228.2	207.5	190.9
57,5°	595.6	660.1	690.6	669.0	605.5	526.5	457.2	401.8	358.6	321.1	285.3	254.5	229.7	207.0	188.8
60,0°	897.1	959.8	952.8	864.4	739.0	609.8	497.0	406.8	334.3	285.2	249.3	216.0	196.1	183.8	174.5
62,5°	1147.2	1145.6	1075.2	953.7	783.7	604.3	437.1	316.8	238.8	187.0	157.2	140.6	129.3	119.9	112.9
65,0°	1140.2	1062.0	943.2	776.3	584.1	406.2	271.7	178.5	129.0	102.9	90.7	82.1	76.9	71.7	67.6
67,5°	852.9	715.2	554.7	398.3	252.6	153.7	106.1	81.9	70.1	64.3	61.5	59.7	59.3	58.8	56.0
70,0°	460.6	337.8	231.0	155.4	103.2	75.1	62.5	55.5	51.5	49.6	48.1	46.9	45.9	46.1	46.2
72,5°	182.3	140.9	106.6	78.2	58.1	47.0	41.2	38.6	37.0	36.0	35.6	34.2	33.6	32.9	27.9
75,0°	85.2	71.5	56.9	44.0	35.4	29.8	27.3	26.0	25.1	24.5	24.2	23.4	22.1	19.8	19.4
77,5°	44.0	38.2	31.8	25.6	21.3	19.0	18.3	17.5	16.9	16.5	16.3	15.8	15.2	14.8	14.4
80,0°	21.2	19.3	16.6	14.1	12.4	11.8	11.6	11.4	11.0	10.9	10.7	10.4	10.1	9.9	9.7
82,5°	9.4	8.9	8.3	7.5	6.9	6.6	6.7	6.7	6.6	6.4	6.3	6.2	6.0	5.8	5.8
85,0°	3.6	3.6	3.5	3.3	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.8	2.6	2.6
87,5°	1.7	1.6	1.6	1.5	1.5	1.4	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
---	--	--------------------------------------



### Table of values for luminous intensities Maximum luminous intensity

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	145.3	145.4	145.4	145.5	145.6	145.6	145.6	142.6	142.5	142.3	142.2	142.2	142.1	142.1	142.1
5,0°	146.1	146.2	146.3	146.4	146.4	146.5	146.5	142.6	142.3	142.0	141.8	141.7	141.5	141.4	141.3
7,5°	147.2	147.2	147.4	147.4	147.4	147.4	147.4	142.5	142.2	141.9	141.5	141.3	141.0	140.9	140.6
10,0°	146.5	146.6	146.6	146.5	146.5	146.5	146.5	142.6	142.2	141.8	141.4	141.0	140.9	140.5	140.2
12,5°	144.4	144.5	144.4	144.4	144.3	144.3	144.2	142.9	142.4	142.0	141.5	141.1	140.7	140.4	139.9
15,0°	142.2	142.2	142.3	142.3	142.3	142.3	142.2	143.8	143.3	142.8	142.3	141.9	141.5	141.2	140.7
17,5°	141.1	141.2	141.3	141.4	141.4	141.4	141.4	145.2	144.8	144.3	143.6	143.0	142.4	141.8	140.8
20,0°	140.4	140.5	140.5	140.7	140.8	140.8	140.8	147.3	146.5	145.6	144.8	143.9	143.0	141.8	140.5
22,5°	139.9	139.8	139.7	139.7	139.6	139.7	139.6	149.4	148.7	147.6	146.5	145.5	144.1	142.5	140.9
25,0°	138.4	138.1	138.0	137.9	137.9	137.9	137.9	151.2	150.2	149.3	148.4	147.4	145.6	143.9	142.0
27,5°	137.1	136.8	136.6	136.5	136.6	136.5	136.6	152.7	151.8	150.9	149.9	148.7	147.0	145.2	143.3
30,0°	135.8	135.5	135.2	135.0	134.9	134.9	134.9	155.2	153.9	152.7	151.4	149.7	147.9	146.1	144.4
32,5°	134.2	133.8	133.5	133.2	133.0	132.9	133.0	156.7	155.1	153.8	152.3	150.5	148.7	147.0	145.0
35,0°	133.5	133.0	132.6	132.3	132.1	131.9	131.7	159.5	158.1	156.8	154.7	152.5	150.7	148.8	146.6
37,5°	134.1	134.6	135.3	135.8	135.6	135.3	135.3	164.1	162.4	160.4	157.6	155.1	152.7	150.7	148.2
40,0°	141.5	143.4	145.4	147.7	148.3	148.1	148.2	165.1	164.0	162.6	160.2	157.7	155.5	153.2	150.2
42,5°	156.6	158.9	161.5	164.4	166.1	166.3	166.6	167.6	166.7	164.7	162.6	160.7	158.1	155.4	152.1
45,0°	175.6	177.6	179.9	182.7	184.9	185.8	186.2	171.1	169.4	167.5	165.8	163.4	161.1	158.2	154.7
47,5°	193.8	193.5	193.6	194.5	196.0	196.2	196.3	180.0	178.3	175.0	171.8	168.7	165.6	162.4	158.6
50,0°	204.0	200.6	199.2	198.4	196.3	193.5	192.8	212.1	205.3	200.3	195.6	190.4	185.6	180.4	173.7
52,5°	197.6	189.8	183.6	178.6	174.9	172.1	170.8	243.5	242.7	237.2	226.1	212.7	202.8	194.8	186.6
55,0°	177.1	164.9	154.2	146.9	142.0	137.7	136.4	306.3	307.5	309.4	296.7	269.6	235.8	209.4	194.7
57,5°	176.5	166.2	159.0	155.0	152.9	149.8	148.6	362.1	379.4	390.6	382.5	352.8	300.9	249.5	216.4
60,0°	167.1	158.5	152.4	147.8	145.2	141.9	140.3	421.2	444.2	465.8	465.4	432.2	370.1	303.7	255.1
62,5°	107.3	100.2	95.5	91.5	89.0	86.4	85.0	467.6	500.7	531.6	543.3	518.0	456.8	379.0	305.5
65,0°	64.9	61.8	59.7	58.1	57.6	55.5	54.5	498.8	534.5	570.4	594.8	578.8	528.7	445.1	355.5
67,5°	53.4	51.7	50.7	49.7	48.7	47.1	47.2	511.9	544.5	577.9	603.6	591.4	551.6	488.4	410.8
70,0°	43.2	41.3	40.3	39.7	39.7	39.7	39.6	483.2	514.9	547.5	567.8	560.5	538.9	500.0	449.0
72,5°	25.2	23.6	23.4	23.5	30.6	32.6	28.2	418.6	437.7	467.2	483.2	493.6	490.6	479.8	460.1
75,0°	19.3	18.6	18.2	18.1	30.1	24.0	20.9	317.6	333.1	354.8	376.5	394.0	408.6	419.8	423.9
77,5°	13.9	13.6	13.2	13.1	14.9	14.6	14.3	205.9	210.9	224.6	243.3	263.8	286.8	308.4	326.0
80,0°	9.3	8.9	8.7	8.6	8.8	8.9	9.2	74.8	83.6	95.3	110.3	128.9	151.2	174.9	196.6
82,5°	5.5	5.2	5.0	4.9	4.9	5.3	5.5	17.3	18.5	21.3	25.4	31.0	39.7	52.1	68.0
85,0°	2.4	2.4	2.4	2.3	2.4	2.3	2.3	3.8	4.0	4.0	3.9	3.9	3.8	3.8	3.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3
2,5°	142.0	141.9	141.9	141.9	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.7
5,0°	141.2	140.9	140.9	140.9	140.8	140.7	140.6	140.4	140.3	140.2	140.1	140.1	140.0	139.8	139.9
7,5°	140.4	140.1	140.0	139.7	139.6	139.3	139.2	139.0	138.8	138.7	138.5	138.4	138.3	138.1	137.9
10,0°	139.9	139.6	139.2	139.0	138.8	138.4	138.1	137.7	137.2	136.9	136.4	136.0	135.7	135.3	134.9
12,5°	139.6	139.3	139.0	138.7	138.1	137.6	137.1	136.4	135.9	135.4	134.9	134.4	133.8	133.2	132.8
15,0°	140.2	139.6	138.8	138.0	137.3	136.6	135.9	135.1	134.3	133.6	132.8	131.9	131.1	130.4	129.8
17,5°	139.7	138.5	137.5	136.4	135.4	134.6	133.9	133.2	132.3	131.4	130.6	129.8	129.0	128.3	127.5
20,0°	139.1	137.8	136.6	135.4	134.4	133.3	132.3	131.4	130.4	129.4	128.5	127.6	126.8	125.9	125.3
22,5°	139.3	137.8	136.4	135.2	133.8	132.4	131.1	129.8	128.5	127.4	126.3	125.4	124.4	123.6	123.0
25,0°	140.1	138.4	136.7	134.9	133.2	131.5	129.9	128.5	126.9	125.5	124.5	123.3	122.4	121.4	120.6
27,5°	141.3	139.2	137.1	134.9	132.8	131.0	129.1	127.2	125.6	124.0	122.8	121.6	120.3	119.1	118.2
30,0°	142.2	140.0	137.6	135.3	132.9	130.7	128.7	126.7	124.8	122.9	121.3	119.9	118.3	116.9	115.6
32,5°	142.9	140.5	138.3	135.8	133.2	130.8	128.5	126.2	123.9	121.9	119.9	118.2	116.5	114.8	113.1
35,0°	144.0	141.3	138.6	135.9	133.3	131.0	128.2	125.6	122.9	120.5	118.2	116.0	114.1	112.2	110.5
37,5°	145.2	142.2	139.2	136.3	133.5	130.3	127.4	124.7	121.8	118.7	116.0	113.6	111.4	109.5	107.9
40,0°	146.9	143.5	140.1	136.9	133.5	129.9	126.4	123.1	120.3	117.3	114.2	111.2	108.6	106.5	104.9
42,5°	148.3	144.3	140.5	137.2	133.5	129.6	125.7	122.1	118.7	115.6	112.2	109.2	106.0	103.3	101.0
45,0°	150.4	146.1	141.8	137.8	134.0	130.3	126.3	122.5	118.4	114.9	111.1	107.4	103.6	99.7	96.4
47,5°	154.1	149.6	145.6	141.5	137.5	132.9	128.8	124.5	120.0	115.9	112.0	107.6	103.4	99.2	94.9
50,0°	166.8	160.9	155.2	149.5	143.5	137.9	131.6	126.4	122.1	117.8	113.2	108.3	104.2	100.6	97.6
52,5°	179.8	174.5	170.1	164.1	156.2	147.8	139.1	130.8	123.7	117.4	111.7	105.9	101.2	98.0	96.6
55,0°	185.2	177.8	170.1	162.7	154.9	147.7	140.2	134.0	127.2	119.1	111.1	103.6	97.7	94.2	93.3
57,5°	199.9	189.5	178.3	167.1	155.5	144.5	134.5	125.1	116.9	109.6	103.4	97.8	92.4	89.1	88.8
60,0°	220.3	197.3	182.2	170.4	157.7	146.8	134.4	121.2	108.5	98.4	90.5	84.7	81.8	81.5	82.9
62,5°	252.5	213.6	190.4	175.7	159.1	144.8	128.9	112.2	98.3	87.7	81.0	76.8	75.3	76.6	78.9
65,0°	290.5	245.2	206.5	177.3	153.7	132.3	113.9	98.3	86.6	78.9	74.8	72.4	71.4	72.1	74.4
67,5°	339.6	279.5	227.5	177.0	142.6	117.7	98.8	85.5	76.4	71.1	68.2	66.4	65.4	65.9	67.6
70,0°	393.3	334.0	256.5	185.8	133.6	105.7	86.3	74.3	67.3	63.1	60.3	58.7	58.0	57.8	59.4
72,5°	430.2	379.5	299.1	206.5	133.5	92.5	71.9	61.6	56.0	52.6	50.3	48.5	47.7	47.8	49.6
75,0°	415.5	386.9	326.1	231.4	141.2	86.0	60.7	50.0	44.1	40.5	38.4	37.2	37.1	37.4	38.3
77,5°	334.1	328.0	299.2	241.7	154.5	82.0	48.4	36.8	31.1	28.1	26.7	25.5	25.2	25.7	26.4
80,0°	211.1	214.2	200.9	168.0	117.3	62.4	29.3	20.8	17.4	15.4	14.2	13.9	13.9	14.3	13.9
82,5°	78.3	80.0	78.5	71.8	58.2	35.0	15.2	8.8	7.4	6.4	5.7	5.3	5.4	5.7	5.6
85,0°	3.8	3.8	4.0	4.1	4.3	4.2	3.4	2.7	2.4	2.3	2.1	2.0	1.9	1.8	1.7
87,5°	1.9	1.8	1.8	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini LED</b>	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	143.3	0.2	0.2
2,5°	141.8	141.8	141.8	141.8	141.8	141.9	141.8	141.8	141.8	141.8	141.8	141.9	141.9	1.7	1.9
5,0°	139.8	139.7	139.8	139.7	139.7	139.6	139.6	139.7	139.6	139.6	139.7	139.7	139.6	3.4	5.3
7,5°	137.7	137.5	137.4	137.2	137.1	137.0	136.8	136.7	136.7	136.6	136.6	136.6	136.6	5.1	10.4
10,0°	134.7	134.5	134.1	133.9	133.6	133.5	133.3	133.2	133.2	133.2	133.1	133.1	133.2	6.7	17.1
12,5°	132.3	131.9	131.5	131.1	130.8	130.5	130.2	130.0	129.9	129.8	129.8	129.7	129.8	8.3	25.5
15,0°	129.2	128.7	128.1	127.7	127.4	127.2	127.0	126.9	127.0	127.0	127.1	127.2	127.2	9.9	35.3
17,5°	126.8	126.2	125.5	125.1	124.6	124.3	124.2	124.0	124.0	123.9	124.0	123.9	123.9	11.4	46.7
20,0°	124.7	124.2	123.5	122.9	122.3	121.8	121.4	121.1	120.9	120.8	120.8	120.8	120.8	12.9	59.6
22,5°	122.4	121.8	121.2	120.6	119.8	119.1	118.5	118.1	117.8	117.6	117.6	117.5	117.4	14.4	74.0
25,0°	119.7	119.1	118.3	117.7	116.9	116.1	115.6	115.1	114.5	114.3	114.2	114.1	114.2	15.9	89.9
27,5°	117.0	116.1	115.3	114.7	113.9	113.2	112.5	111.8	111.1	110.6	110.3	110.1	110.1	17.3	107.2
30,0°	114.3	113.3	112.4	111.5	110.7	110.0	109.2	108.5	107.8	107.0	106.6	106.5	106.4	18.6	125.8
32,5°	111.8	110.6	109.5	108.5	107.6	106.7	105.9	105.2	104.4	103.6	103.1	102.7	102.7	20.0	145.8
35,0°	109.1	107.8	106.6	105.6	104.4	103.3	102.3	101.5	100.6	99.6	98.8	98.2	98.1	21.4	167.2
37,5°	106.5	105.1	103.7	102.4	101.0	99.3	98.0	96.9	95.9	94.8	93.8	93.0	92.8	22.8	190.0
40,0°	103.2	101.4	99.7	98.0	96.0	93.8	92.0	90.9	89.8	88.6	87.6	86.9	86.8	24.7	214.6
42,5°	98.6	96.1	93.4	90.9	88.6	86.1	84.7	83.9	82.1	80.4	79.4	78.7	78.7	26.6	241.3
45,0°	92.8	89.4	86.2	83.0	80.4	77.9	76.4	75.7	74.4	73.1	72.5	71.9	71.7	28.4	269.7
47,5°	90.8	87.5	84.4	82.0	80.0	78.3	77.1	77.0	76.7	76.5	76.6	76.5	76.4	31.1	300.7
50,0°	95.5	94.6	94.8	96.3	98.8	101.6	104.9	109.2	112.6	115.5	117.9	119.1	119.4	35.8	336.5
52,5°	97.6	100.0	104.4	110.6	118.5	126.5	134.5	142.9	149.7	155.3	159.0	161.2	161.7	41.6	378.2
55,0°	96.1	101.2	108.2	117.3	128.1	139.3	149.5	159.6	168.4	174.7	179.0	181.7	182.0	50.3	428.5
57,5°	92.0	97.7	105.7	115.2	125.6	137.4	147.7	156.0	164.1	168.5	171.3	173.0	173.5	62.1	490.5
60,0°	86.4	92.0	99.3	107.9	116.7	125.7	134.1	140.1	144.4	147.1	148.2	148.8	148.9	73.7	564.2
62,5°	82.3	86.6	92.5	98.5	103.8	108.3	112.0	113.8	113.3	112.8	111.5	109.6	109.0	81.0	645.2
65,0°	77.0	80.1	84.5	88.9	92.5	94.7	96.5	96.0	94.6	92.1	89.7	87.9	86.8	81.9	727.1
67,5°	71.0	74.2	78.2	81.7	83.6	84.2	84.2	82.0	79.9	77.4	74.4	72.9	71.2	75.6	802.6
70,0°	62.4	65.9	69.3	72.3	71.9	69.4	67.1	62.8	60.2	56.1	54.8	52.6	50.9	64.8	867.5
72,5°	51.7	55.1	56.3	57.8	55.6	52.7	49.5	43.5	40.9	37.7	40.4	36.4	33.9	51.4	918.8
75,0°	40.3	40.8	40.7	39.5	38.9	34.0	24.1	14.9	12.9	12.3	18.1	12.0	11.0	38.4	957.2
77,5°	26.4	26.6	26.8	23.3	15.7	8.2	7.0	6.6	6.4	5.6	5.3	4.7	4.7	25.3	982.6
80,0°	14.0	13.2	11.4	6.5	4.5	4.0	3.4	3.2	3.0	2.4	1.9	1.7	1.8	12.1	994.7
82,5°	5.4	4.7	3.5	2.7	2.4	2.1	1.9	1.7	1.5	1.2	1.1	1.1	1.0	4.2	998.8
85,0°	1.5	1.5	1.4	1.2	1.2	1.1	1.0	0.9	0.9	0.7	0.7	0.7	0.6	0.8	999.6
87,5°	1.0	1.0	0.9	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> 59337_590
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9580	71.0	75.2	73.1
95	241	252	9090	66.0	69.9	68.0
90	229	250	8637	61.7	65.3	63.5
85	216	248	8147	57.1	60.4	58.8
80	203	246	7656	52.8	55.8	54.3
75	190	243	7166	48.6	51.4	50.0
70	178	241	6714	44.8	47.4	46.1
65	165	238	6223	41.0	43.3	42.2
60	152	235	5733	37.3	39.3	38.3
55	140	232	5280	33.9	35.8	34.8
50	127	229	4790	30.4	32.0	31.2
45	114	225	4300	27.1	28.5	27.8
40	102	221	3847	24.1	25.4	24.8
35	89	216	3357	20.9	22.0	21.4
30	76	210	2866	18.0	18.9	18.4
25	63	203	2376	15.1	15.8	15.4
20	51	195	1924	12.5	13.1	12.8
15	38	184	1433	9.6	10.1	9.8
11	28	173	1056	7.4	7.7	7.6

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9580	69.1	72.1	70.6
95	241	252	9089	64.5	67.3	65.9
90	229	250	8637	60.4	63.0	61.7
85	216	248	8147	56.1	58.5	57.3
80	203	246	7656	51.9	54.1	53.0
75	191	244	7204	48.3	50.3	49.3
70	178	241	6713	44.3	46.2	45.2
65	165	238	6223	40.6	42.3	41.4
60	152	235	5733	37.0	38.5	37.8
55	140	232	5280	33.7	35.1	34.4
50	127	229	4790	30.3	31.5	30.9
45	114	225	4300	27.0	28.1	27.6
40	102	221	3847	24.0	25.1	24.6
35	89	216	3357	20.9	21.7	21.3
30	76	210	2866	18.0	18.7	18.4
25	64	204	2414	15.4	15.9	15.6
20	51	195	1923	12.5	13.0	12.8
15	38	184	1433	9.7	10.1	9.9
11	28	173	1056	7.4	7.6	7.5



## Photometric test report

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> 59337_590
--	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	9580	69.8	73.0	71.4
95	241	252	9090	65.1	67.9	66.5
90	229	250	8637	60.9	63.5	62.2
85	216	248	8147	56.5	58.9	57.7
80	203	246	7656	52.3	54.4	53.4
75	191	244	7204	48.5	50.5	49.5
70	178	241	6714	44.6	46.4	45.5
65	165	238	6223	40.7	42.4	41.6
60	152	235	5733	37.1	38.6	37.8
55	140	232	5280	33.8	35.1	34.4
50	127	229	4790	30.3	31.5	30.9
45	114	225	4300	27.0	28.1	27.6
40	102	221	3847	24.1	25.0	24.6
35	89	216	3357	21.0	21.8	21.4
30	76	210	2866	18.0	18.6	18.3
25	64	204	2414	15.3	15.8	15.6
20	51	195	1924	12.5	12.9	12.7
15	38	184	1433	9.7	10.0	9.8
11	28	173	1056	7.4	7.7	7.6

**Photometric test report**

<b>Family</b> Streetlight 21 mini LED	<b>Order number: 5XE2P31Y08HB</b> <b>EAN: 4058352923764</b>	<b>LP number</b> <b>59337_590</b>
--	--	--------------------------------------

<b>Luminousfluxs table</b>	<b>sITeco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	9580.0	71.0
5.0	9580.0	69.1
15.0	9580.0	69.8