
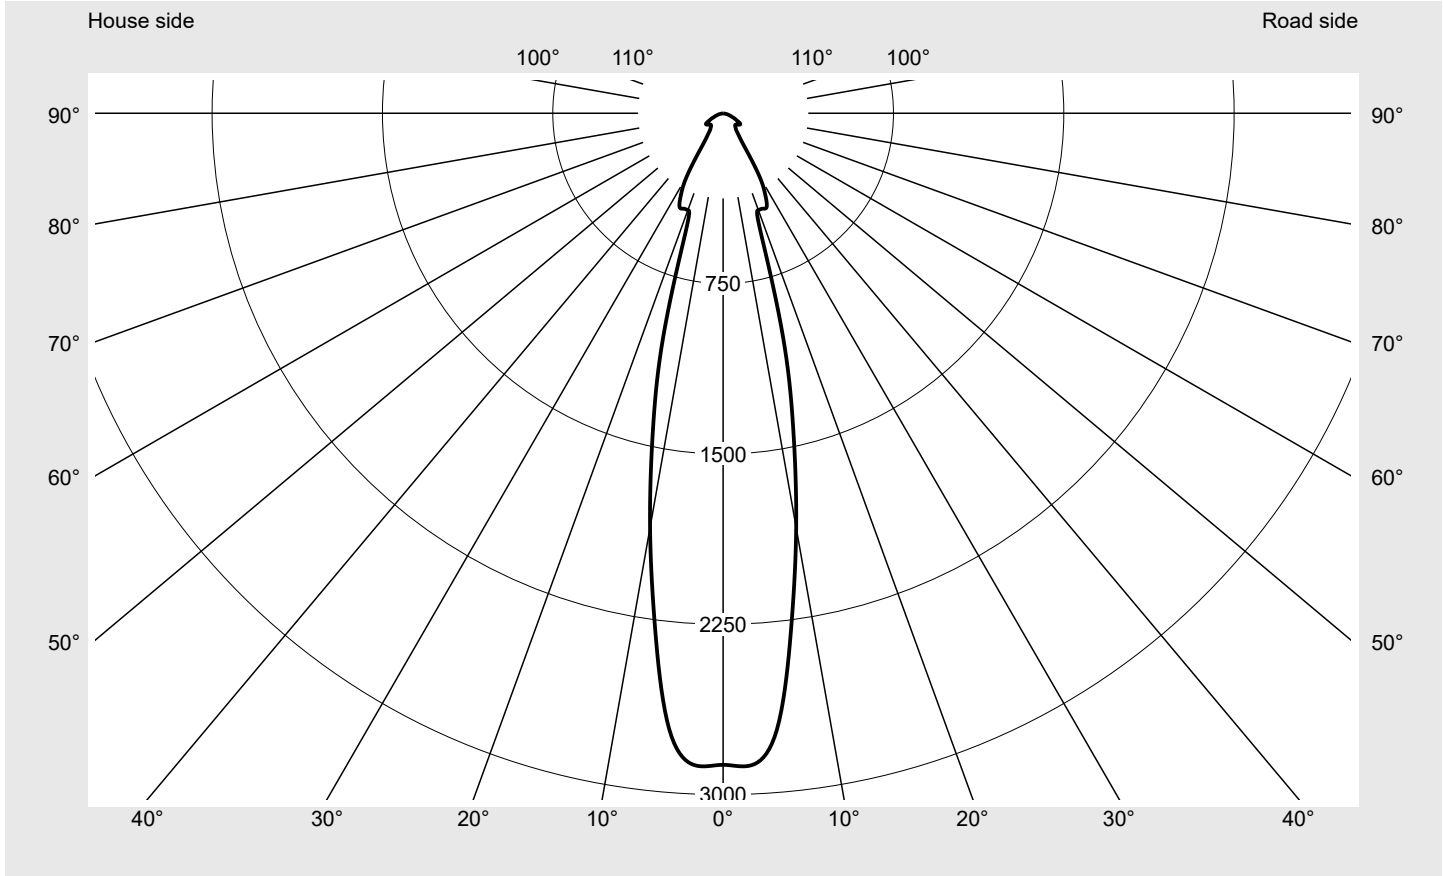


# Photometric test report

<b>Family</b> <b>Floodlight FL21 midi</b>	<b>Order number: 5XA7782E1B1A</b> <b>EAN: 4058352853290</b>	<b>LP number</b> <b>59238_84</b>
	<b>Version</b> mounting bracket <b>Optic</b> symmetric distribution RS12 <b>Cover</b> toughened safety glass <b>Lamps</b> LED 2200 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 22130 lm Power consumption = 208.1 W Luminous efficacy = 106.3 lm/W	<b>serial documentation</b> <b>22.08.2023</b>



**Luminous intensity in cd/klm** C180-0 **Imax: 2873 cd/klm**



**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1B1A</b> <b>EAN: 4058352853290</b>	<b>LP number</b> 59238_84
---------------------------------------	--	------------------------------

**Envelope curve in cd/klm** KMK 2.5°  KMK 0°  siteco

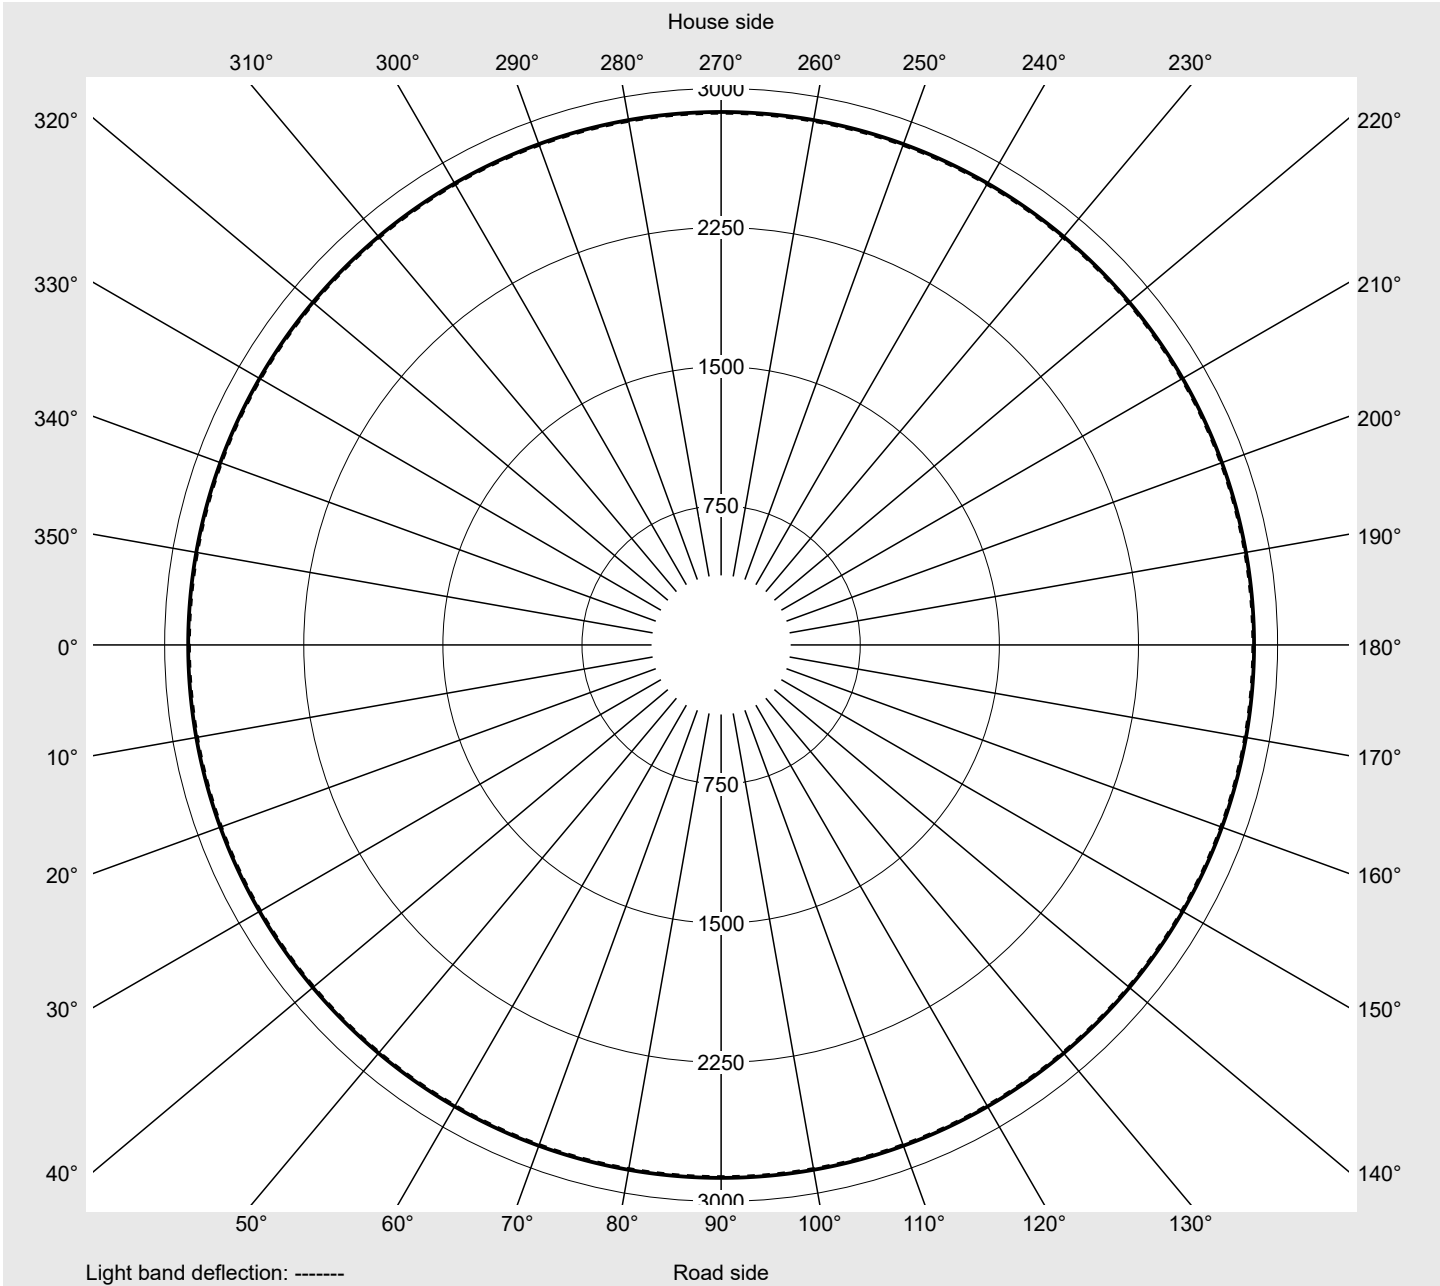

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1B1A</b> <b>EAN: 4058352853290</b>	<b>LP number</b> 59238_84
---------------------------------------	--	------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight FL21 midi	<b>Order number: 5XA7782E1B1A</b> <b>EAN: 4058352853290</b>	<b>LP number</b> 59238_84
---------------------------------------	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	22130	208.1	227.1	217.6
95	241	252	20997	193.8	211.2	202.5
90	229	250	19952	181.2	197.5	189.4
85	216	248	18819	167.9	182.9	175.4
80	203	246	17687	155.2	168.9	162.0
75	190	243	16554	143.1	155.4	149.2
70	178	241	15508	132.2	143.6	137.9
65	165	238	14376	120.8	131.2	126.0
60	152	235	13243	110.0	119.2	114.6
55	140	232	12198	100.1	108.6	104.4
50	127	229	11065	89.9	97.4	93.6
45	114	225	9932	79.9	86.5	83.2
40	102	221	8887	70.8	76.8	73.8
35	89	216	7754	61.4	66.4	63.9
30	76	210	6622	52.2	56.4	54.3
25	63	203	5489	43.6	46.9	45.2
20	51	195	4443	35.9	38.5	37.2
15	38	184	3311	27.6	29.6	28.6
13	32	178	2788	23.9	25.5	24.7