




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1EDV4E5G EAN: 4058352925225	LP number 59263_184
	Version cover frosted, elliptical narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 14850 lm Power consumption = 84.1 W Luminous efficacy = 176.6 lm/W	serial documentation 14.09.2023





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 1670 cd/klm**

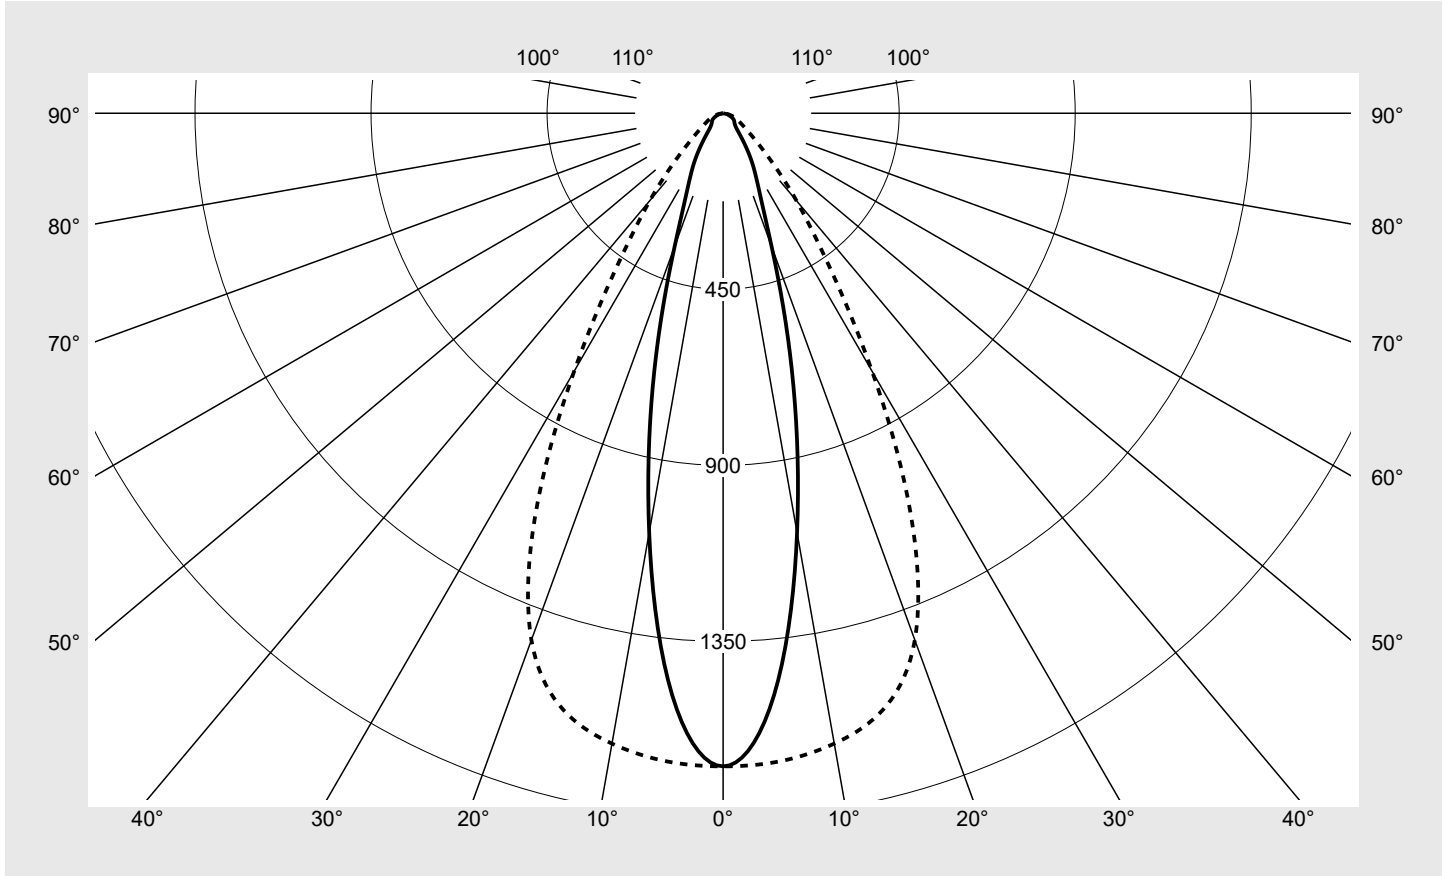

Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=95 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1EDV4E5G EAN: 4058352925225	LP number 59263_184
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	180°	Luminous intensity in cd/klm							Luminous flux in lm/klm
0°	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	10.0	10.0
5°	1493.3	1495.6	1516.6	1565.9	1616.3	1649.8	1662.9	75.0	85.0
10°	1088.5	1106.7	1175.0	1303.4	1460.6	1586.1	1636.2	126.8	211.8
15°	678.3	712.7	825.0	1006.5	1239.9	1474.8	1578.7	151.0	362.9
20°	362.1	388.9	492.0	707.6	980.6	1275.8	1432.9	148.2	511.0
25°	217.8	231.1	285.8	436.7	705.9	972.9	1137.5	127.8	638.8
30°	151.3	158.5	185.3	264.1	455.8	646.3	761.7	99.0	737.8
35°	95.4	107.0	131.3	171.8	268.4	391.1	463.8	70.7	808.5
40°	57.7	64.5	93.9	120.6	157.9	239.7	291.4	50.0	858.5
45°	43.5	45.9	58.2	86.3	99.5	145.4	176.9	35.2	893.7
50°	37.7	39.0	42.8	61.0	68.3	89.3	109.1	26.2	919.9
55°	34.6	35.0	36.7	43.5	50.5	59.6	73.7	20.9	940.8
60°	30.2	31.1	32.8	34.2	38.6	42.0	53.5	17.5	958.3
65°	23.9	25.4	29.1	28.1	30.1	30.8	41.3	14.6	972.8
70°	17.0	18.4	22.5	23.3	23.4	22.7	30.8	11.5	984.3
75°	10.9	12.0	16.2	17.9	17.4	15.7	20.7	8.4	992.7
80°	6.2	6.7	9.0	10.7	11.0	9.3	11.6	5.0	997.7
85°	3.1	3.3	4.2	5.0	4.8	3.9	4.2	2.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1EDV4E5G EAN: 4058352925225	LP number 59263_184
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.1	16.3	15.5	16.7	17.0	20.1	21.4	20.5	21.7	22.0
	3H	16.3	17.4	16.7	17.7	18.1	20.7	21.8	21.1	22.1	22.4
	4H	16.6	17.7	17.0	18.0	18.4	21.0	21.9	21.4	22.3	22.7
	6H	16.9	17.8	17.3	18.2	18.6	21.2	22.1	21.6	22.4	22.8
	8H	17.1	17.9	17.5	18.3	18.7	21.3	22.1	21.8	22.5	22.9
	12H	17.1	17.9	17.5	18.3	18.7	21.4	22.0	21.8	22.4	22.9
4H	2H	15.9	16.9	16.3	17.3	17.6	20.1	21.1	20.5	21.5	21.9
	3H	17.4	18.2	17.8	18.6	19.0	20.8	21.7	21.2	22.1	22.5
	4H	17.9	18.6	18.3	19.0	19.5	21.2	21.9	21.6	22.4	22.8
	6H	18.2	18.8	18.6	19.3	19.7	21.5	22.1	22.0	22.6	23.0
	8H	18.3	18.9	18.8	19.3	19.8	21.6	22.2	22.1	22.6	23.1
	12H	18.4	18.9	18.9	19.3	19.8	21.7	22.1	22.2	22.6	23.1
8H	4H	18.4	18.9	18.8	19.3	19.8	21.3	21.9	21.8	22.3	22.8
	6H	18.8	19.2	19.3	19.7	20.2	21.7	22.2	22.2	22.6	23.1
	8H	18.9	19.3	19.4	19.8	20.4	21.8	22.2	22.3	22.7	23.3
	12H	19.1	19.4	19.6	19.9	20.5	21.9	22.3	22.4	22.8	23.3
12H	4H	18.4	18.9	18.9	19.3	19.8	21.3	21.8	21.8	22.2	22.7
	6H	18.9	19.3	19.4	19.8	20.3	21.7	22.1	22.2	22.6	23.1
	8H	19.1	19.4	19.6	19.9	20.5	21.9	22.2	22.4	22.7	23.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2250
			B = 58

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		6998.6	7382.6	9358.3	13884.5	16017.8	23398.9	28474.6	
50°		6681.0	6900.7	7576.4	10805.1	12093.1	15814.1	19320.4	
55°		6856.8	6940.0	7285.0	8625.1	10022.2	11829.3	14625.3	
60°		6863.1	7088.6	7468.2	7789.6	8783.2	9554.3	12174.0	
65°		6442.8	6832.1	7840.0	7568.6	8112.7	8287.5	11124.1	
70°		5648.4	6109.5	7479.0	7759.4	7784.1	7541.5	10256.7	
75°		4773.4	5279.9	7119.9	7884.5	7656.7	6920.7	9096.2	
80°		4032.8	4361.1	5901.7	6983.6	7188.7	6086.5	7614.7	
85°		4080.1	4351.7	5537.2	6563.4	6287.9	5084.1	5448.4	


Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1EDV4E5G EAN: 4058352925225	LP number 59263_184
--	--	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

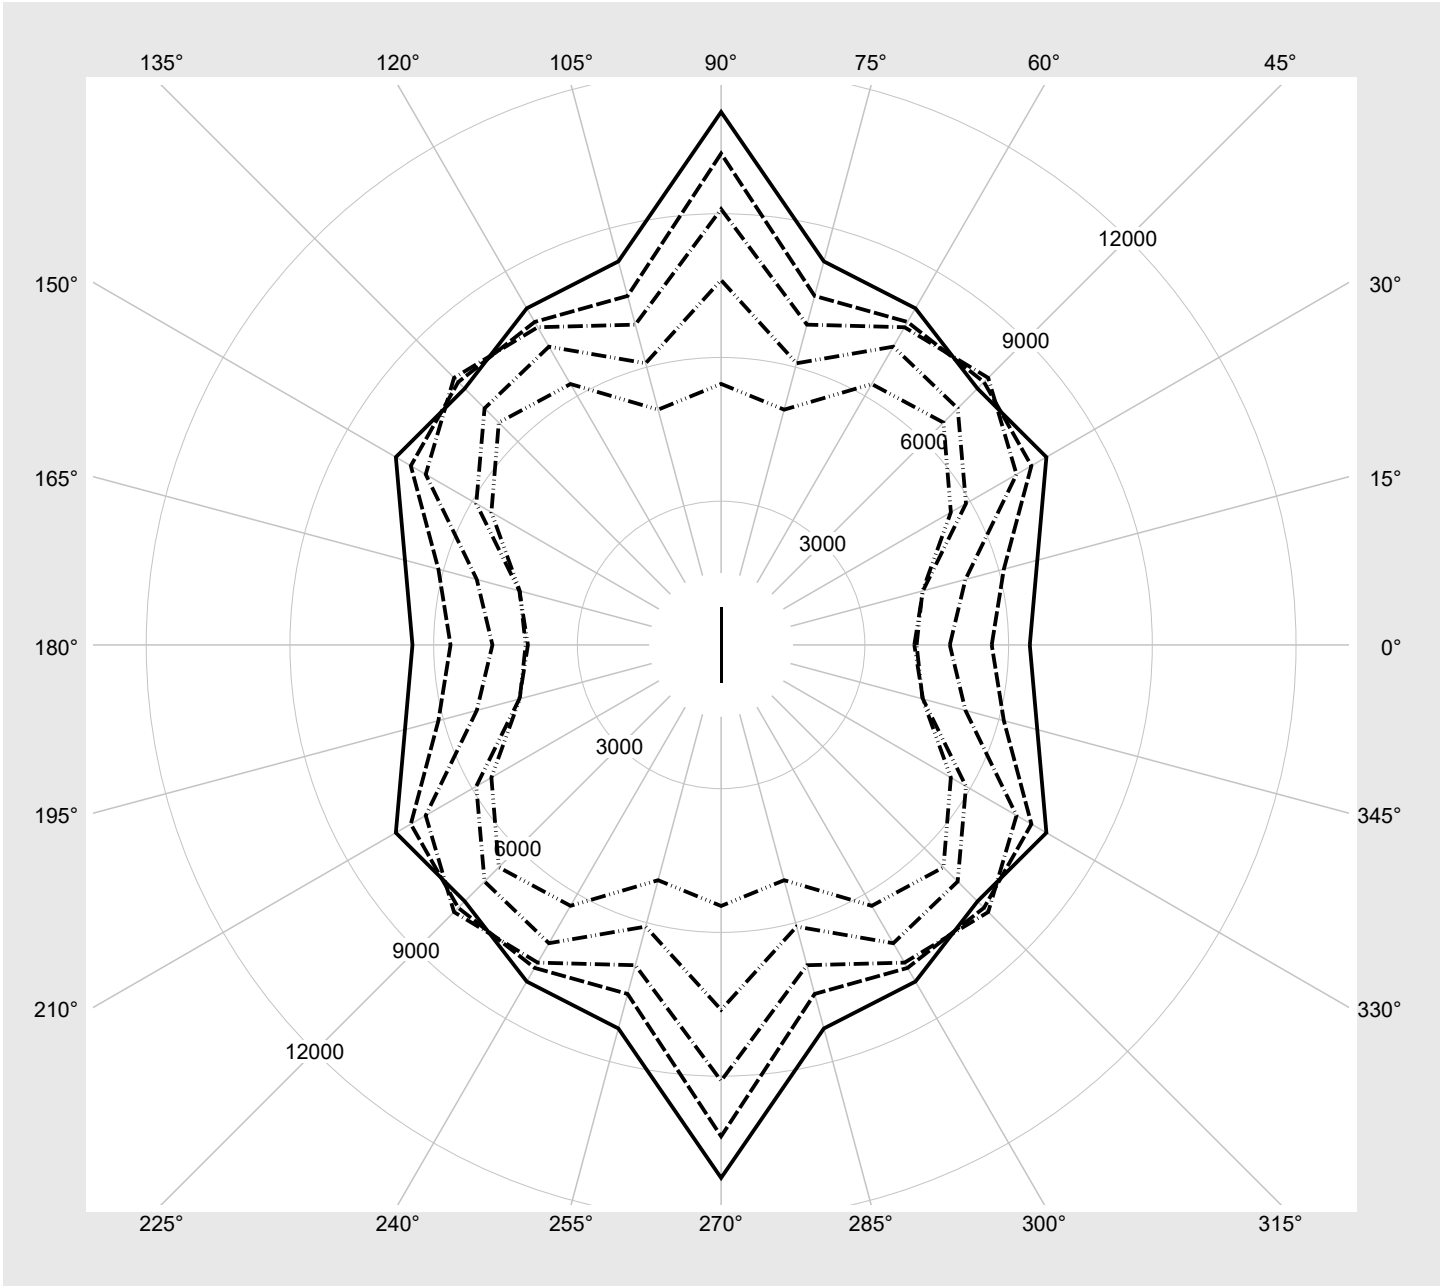

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1EDV4E5G EAN: 4058352925225	LP number 59263_184
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14850	84.1
95	240	252	14101	79.4
90	226	250	13339	74.7
85	213	248	12628	70.4
80	199	245	11857	65.7
75	186	243	11130	61.4
70	173	240	10401	57.0
65	160	237	9664	52.7
60	147	234	8920	48.5
55	134	231	8164	44.2
50	121	227	7404	40.0
45	109	223	6698	36.2
40	96	218	5922	32.1
35	84	213	5204	28.2
30	72	208	4479	24.5
25	59	201	3682	20.4
20	47	192	2945	16.4
15	35	181	2200	12.3
10	24	168	1511	8.5
5	12	142	750	4.2
2	4	102	242	1.3