


## Photometric test report

<b>Family</b> <b>Streetlight 11 mini LED</b>	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> <b>59352_35</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, extremely wide distribution with an additional rear light component (ST1.0P1.0) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 8200 lm Power consumption = 58.1 W Luminous efficacy = 141.1 lm/W	<b>serial documentation</b> <b>28.09.2023</b>



**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 716 cd/klm**

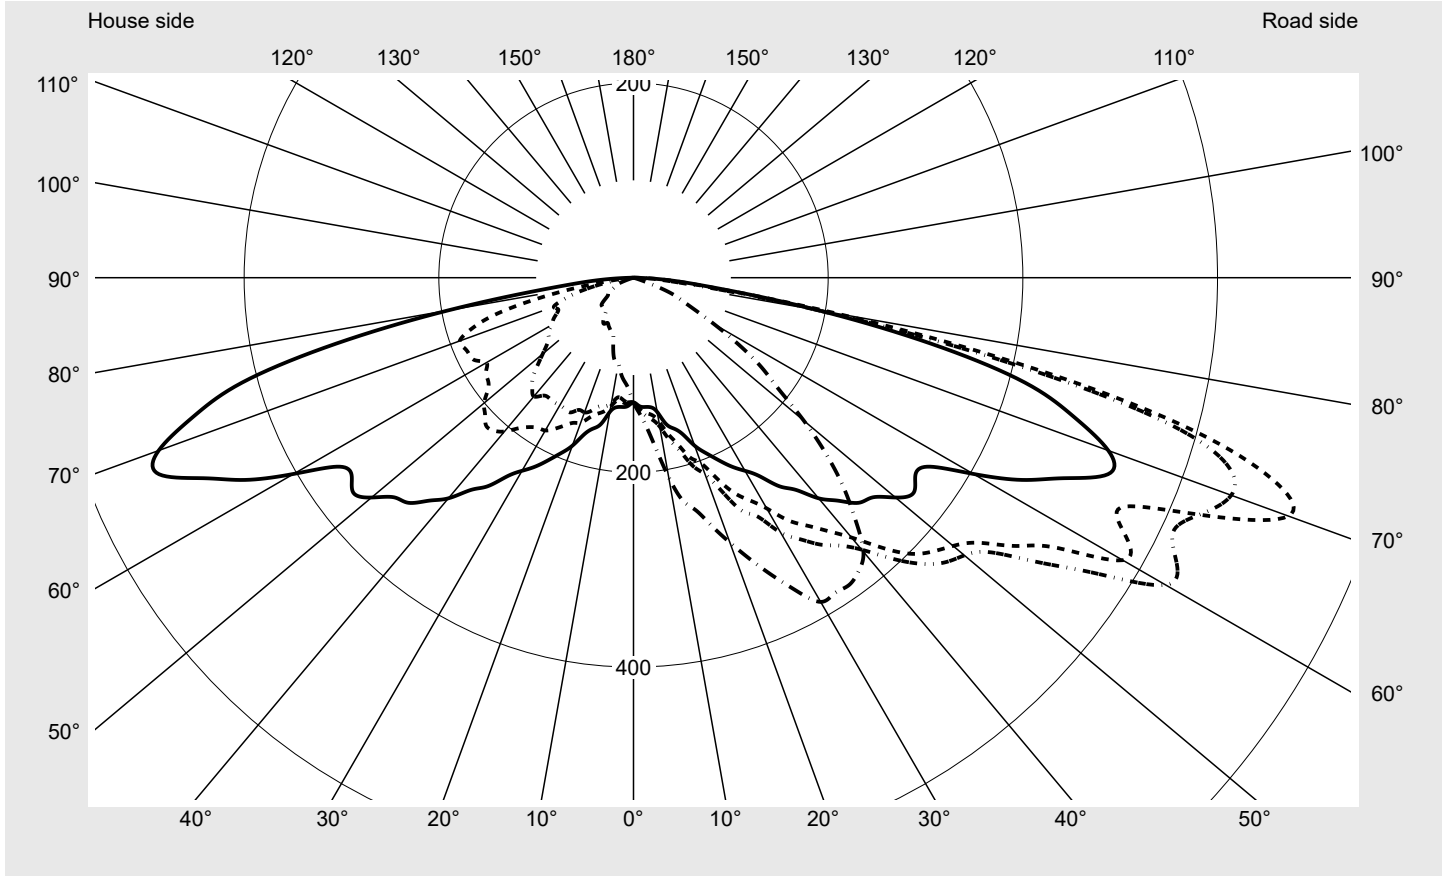

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	---
Imax 70°	715.9
Imax 80°	211.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> 59352_35
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 70°**    **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**      **siteco**

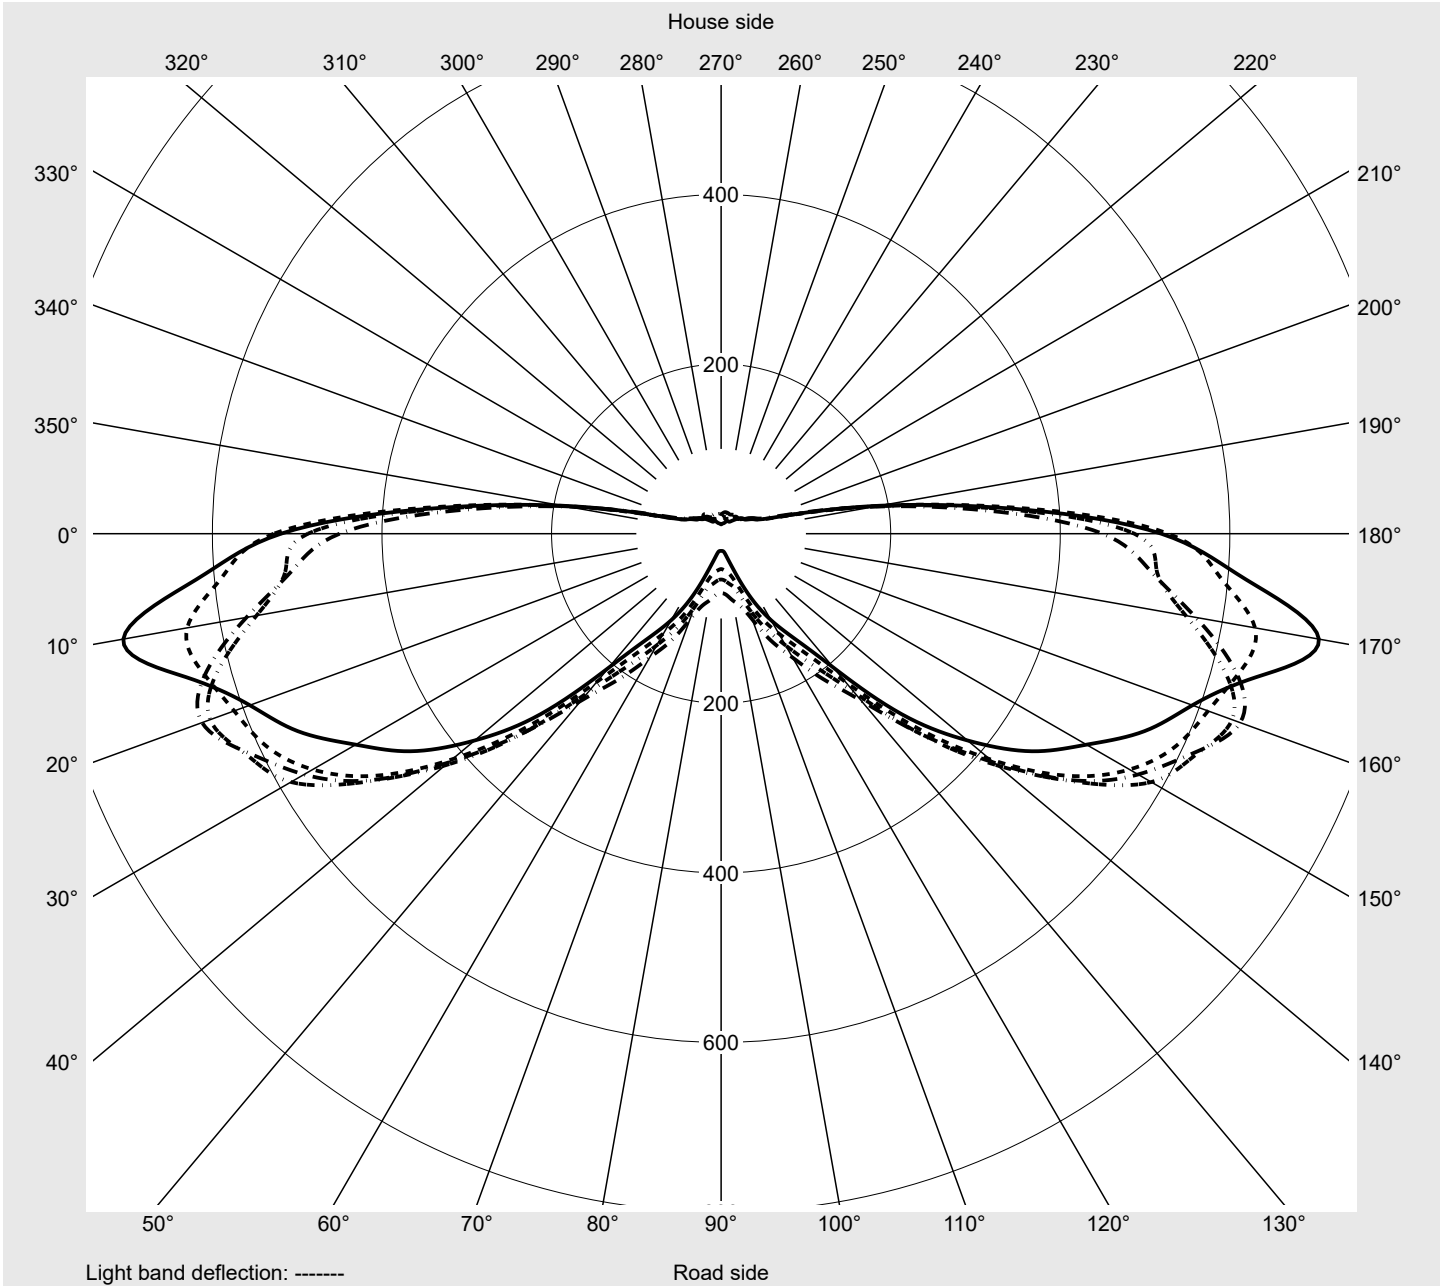

## Photometric test report

<b>Family</b> <b>Streetlight 11 mini LED</b>	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> <b>59352_35</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2
2,5°	131.9	133.1	134.4	135.3	136.1	137.2	138.1	138.5	138.9	139.0	139.3	139.7	140.0
5,0°	133.3	136.3	139.2	142.0	144.2	146.8	149.3	150.8	152.3	154.0	154.1	154.1	154.2
7,5°	134.2	137.3	142.1	147.0	151.6	156.3	160.9	163.9	165.5	166.2	166.4	167.5	169.8
10,0°	140.0	143.8	149.6	155.4	160.3	165.9	171.0	176.6	180.6	184.8	189.2	191.7	194.2
12,5°	153.8	159.9	164.5	170.5	174.5	179.0	185.9	193.5	201.5	207.2	212.6	217.0	218.2
15,0°	160.5	168.7	177.7	183.9	189.8	198.0	203.8	210.6	218.6	226.9	235.9	241.4	244.7
17,5°	168.8	181.3	193.8	202.8	211.2	220.6	226.5	232.5	237.6	240.4	243.6	251.6	259.6
20,0°	183.7	194.6	202.9	215.1	230.5	240.6	251.4	262.0	264.0	267.2	266.7	270.0	277.4
22,5°	195.2	209.8	222.8	237.7	255.0	268.7	279.1	288.6	294.5	291.2	288.3	291.7	296.8
25,0°	206.8	223.4	243.5	264.4	283.7	298.5	310.0	318.7	318.7	310.6	309.8	312.9	314.5
27,5°	218.8	238.9	257.7	276.8	296.1	315.4	328.9	335.6	334.9	328.2	328.2	328.1	333.0
30,0°	229.1	251.4	273.7	302.4	319.0	329.9	343.0	351.4	352.9	349.2	351.7	347.0	346.1
32,5°	242.1	269.4	295.4	318.6	334.2	353.6	363.1	368.9	375.2	371.5	368.4	360.1	360.1
35,0°	261.7	283.1	310.9	334.7	348.2	363.7	367.7	375.9	382.1	380.9	376.9	366.9	362.4
37,5°	275.0	302.3	328.0	346.9	361.7	374.6	383.0	386.3	384.6	381.1	372.6	362.9	351.7
40,0°	295.9	325.1	348.4	364.7	379.0	389.7	398.2	394.9	389.9	378.8	363.5	351.0	337.2
42,5°	310.6	339.7	375.5	390.8	405.9	417.4	419.7	407.0	389.2	375.6	363.2	351.1	338.1
45,0°	327.0	356.8	401.0	415.5	422.4	435.0	432.0	419.7	398.7	383.6	359.5	333.6	325.0
47,5°	333.9	374.9	416.5	433.1	447.7	461.2	453.6	427.5	405.6	391.2	348.5	311.8	303.8
50,0°	351.3	396.6	428.7	443.8	458.8	467.3	466.8	442.8	412.8	374.7	335.7	302.3	279.2
52,5°	362.8	409.2	447.3	463.6	472.4	479.1	473.9	438.9	404.4	361.4	312.7	270.8	244.5
55,0°	353.5	419.5	480.5	510.4	523.1	504.3	493.2	458.8	414.4	346.1	280.2	243.6	218.3
57,5°	361.3	439.7	516.9	566.3	574.9	547.1	515.9	475.9	416.0	335.6	267.1	224.4	202.3
60,0°	403.1	486.3	580.4	631.1	636.4	593.2	539.7	488.6	417.9	327.6	263.9	223.6	188.6
62,5°	449.9	508.7	568.4	628.4	651.5	613.4	567.9	507.1	419.8	334.7	257.1	208.9	168.8
65,0°	487.4	516.0	556.5	612.9	641.3	617.4	585.9	509.9	425.2	335.5	244.6	189.6	152.1
67,5°	527.6	591.0	639.4	632.8	611.2	592.2	556.2	497.7	413.8	320.6	228.0	170.6	135.9
70,0°	519.1	621.7	715.9	653.5	591.6	551.0	497.6	447.4	379.4	300.9	206.4	151.2	117.8
72,5°	473.8	582.3	687.8	639.5	567.2	504.4	431.3	383.3	340.4	281.0	189.5	101.8	60.1
75,0°	416.3	513.3	580.7	556.3	489.7	409.1	328.8	303.1	269.2	185.1	81.6	28.7	9.7
77,5°	313.0	368.1	399.1	375.0	320.3	276.7	231.0	180.0	107.5	42.5	10.9	3.3	1.9
80,0°	193.3	205.6	211.6	192.3	158.7	133.4	99.0	48.9	15.9	5.9	2.9	2.1	1.5
82,5°	95.8	94.8	91.2	78.0	60.2	46.5	29.0	15.0	7.5	4.3	2.2	1.6	1.2
85,0°	49.4	47.7	46.4	32.8	19.7	17.3	14.3	9.4	4.8	2.7	1.4	1.1	0.8
87,5°	18.5	18.0	17.4	12.3	7.3	6.4	5.3	3.5	1.8	1.0	0.5	0.4	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 mini LED</b>	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> <b>59352_35</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2
2,5°	139.7	139.2	139.3	139.5	139.6	139.5	130.6	129.3	128.1	127.1	125.8	124.4	123.2
5,0°	154.0	153.5	153.4	153.5	154.3	153.9	131.0	128.3	125.8	123.5	120.9	118.8	116.8
7,5°	171.5	172.2	173.4	174.8	176.4	177.3	130.7	127.2	124.0	121.7	119.7	117.5	115.2
10,0°	196.7	199.5	202.4	204.3	207.0	208.0	136.6	134.1	131.0	128.3	124.5	120.1	115.3
12,5°	220.5	223.4	225.6	229.3	233.0	234.6	147.2	140.8	135.1	129.1	123.4	118.9	115.0
15,0°	246.7	246.7	249.3	249.3	247.0	247.3	153.2	144.8	137.0	130.4	123.2	116.0	110.6
17,5°	263.7	263.9	267.0	268.9	268.4	267.3	159.5	150.7	143.2	135.1	124.2	115.1	110.9
20,0°	283.7	287.5	288.9	289.9	287.7	289.6	170.7	158.5	147.2	136.2	123.9	115.3	112.5
22,5°	302.3	308.6	313.5	316.4	314.2	313.1	176.9	161.4	147.0	134.8	124.0	114.1	108.1
25,0°	319.6	325.0	330.2	333.5	335.7	337.5	185.9	167.5	152.7	135.2	120.4	108.9	101.7
27,5°	339.9	342.2	348.2	354.7	358.9	362.7	196.0	175.0	152.2	131.1	115.5	101.5	90.0
30,0°	350.5	354.2	362.3	371.3	380.3	384.6	206.0	181.2	151.3	128.1	109.5	92.6	79.5
32,5°	360.5	358.1	371.9	386.1	389.5	384.4	214.1	182.9	151.7	125.9	103.9	85.8	74.0
35,0°	363.6	363.5	372.6	389.9	389.0	385.7	226.4	187.4	151.1	120.7	97.8	79.7	70.6
37,5°	354.5	356.5	368.3	381.3	381.6	380.0	236.5	195.1	152.6	116.8	91.1	72.8	66.4
40,0°	342.3	347.0	351.6	357.7	363.5	367.5	247.9	206.3	159.2	117.9	90.7	68.7	61.2
42,5°	339.3	336.1	327.7	330.1	331.6	337.6	263.3	212.9	153.9	111.4	86.4	64.7	57.2
45,0°	321.2	313.7	310.4	306.0	304.1	305.7	277.7	214.3	146.6	99.8	80.5	63.4	53.5
47,5°	299.5	281.5	270.1	265.8	264.6	268.8	276.2	206.9	134.0	90.1	74.0	60.8	49.6
50,0°	262.1	248.2	239.5	227.8	224.5	228.3	281.5	200.4	121.7	81.1	68.2	55.1	45.9
52,5°	228.3	216.8	205.2	190.1	185.4	187.8	276.3	188.3	111.8	72.3	59.3	48.0	42.3
55,0°	199.7	185.0	171.8	152.6	152.8	160.7	269.3	182.7	106.3	63.6	51.7	43.1	38.9
57,5°	179.3	152.6	137.0	127.5	126.4	128.8	269.6	179.7	103.7	58.3	47.2	37.3	34.6
60,0°	155.7	127.5	108.3	102.7	97.7	96.2	278.8	174.5	97.1	56.9	46.7	36.8	34.2
62,5°	139.1	107.8	88.5	80.1	72.6	70.1	314.0	183.6	92.8	53.4	43.5	36.4	32.3
65,0°	122.3	92.6	68.8	60.7	55.9	54.0	333.9	186.3	87.0	49.3	42.3	35.8	29.9
67,5°	107.1	75.0	54.9	46.5	43.4	41.7	350.6	188.3	84.1	49.6	41.2	35.2	30.4
70,0°	83.7	49.8	31.3	22.8	20.5	20.3	341.6	190.0	87.1	49.6	40.6	33.1	31.3
72,5°	32.1	13.9	7.4	4.8	4.2	4.1	315.2	174.3	76.4	45.7	37.5	30.4	29.4
75,0°	2.6	1.7	1.5	1.3	1.2	1.2	268.9	148.1	61.6	40.1	35.1	29.3	26.7
77,5°	1.6	1.3	1.1	1.0	1.0	0.9	198.3	104.8	42.7	27.8	26.0	20.9	16.4
80,0°	1.2	1.0	0.8	0.7	0.7	0.7	119.3	59.6	25.9	15.2	13.3	9.2	5.3
82,5°	0.9	0.8	0.6	0.5	0.5	0.5	59.8	24.2	13.5	5.8	4.8	3.5	2.9
85,0°	0.6	0.5	0.4	0.4	0.3	0.3	29.0	8.5	5.3	2.1	2.0	1.9	2.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	10.8	3.2	2.0	0.8	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> 59352_35
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	0.2	0.2
2,5°	121.7	120.7	119.3	118.4	117.6	116.9	116.2	115.4	115.0	114.9	114.6	1.6	1.7
5,0°	114.8	113.1	112.0	110.8	109.7	109.0	108.3	107.7	107.4	107.0	106.8	3.2	4.9
7,5°	112.8	110.1	107.8	105.2	102.4	100.6	99.8	99.2	99.2	99.4	99.0	4.9	9.8
10,0°	111.0	108.1	106.0	104.2	102.2	100.5	98.4	95.8	92.3	90.4	89.5	7.0	16.8
12,5°	110.8	106.9	104.3	101.8	98.8	95.9	93.2	90.1	88.4	87.5	87.5	9.3	26.0
15,0°	106.6	103.0	99.1	94.7	90.0	86.2	83.5	81.4	80.1	79.8	79.9	11.6	37.6
17,5°	107.1	99.8	93.5	88.0	83.4	78.6	74.7	73.0	71.8	70.3	69.1	14.1	51.7
20,0°	109.2	100.0	89.7	83.8	79.9	76.0	71.7	67.3	64.0	62.0	61.1	16.9	68.6
22,5°	102.5	91.8	83.7	78.7	75.2	70.8	68.2	66.2	63.7	61.2	59.8	20.1	88.7
25,0°	95.1	84.8	76.7	72.5	67.6	62.8	60.8	59.7	57.7	57.3	57.7	23.2	112.0
27,5°	84.0	78.9	72.9	68.0	63.2	59.7	57.5	57.1	57.2	56.1	55.5	26.3	138.3
30,0°	72.7	70.2	65.5	61.1	60.2	59.3	57.7	56.9	54.7	53.5	53.6	29.5	167.8
32,5°	68.2	64.3	59.9	57.8	57.7	56.3	53.8	53.1	53.3	54.6	56.2	32.7	200.5
35,0°	64.3	59.7	55.2	54.1	55.3	52.4	49.2	48.4	52.0	54.4	54.1	35.3	235.8
37,5°	60.9	56.9	53.6	52.1	51.2	50.8	50.3	48.5	48.3	48.8	48.6	37.6	273.4
40,0°	57.3	53.2	50.6	49.1	47.0	46.1	47.1	48.1	48.2	45.9	43.8	39.8	313.2
42,5°	53.3	50.2	45.6	45.2	44.9	45.4	45.9	46.0	45.8	44.5	43.9	42.0	355.2
45,0°	50.6	48.2	43.3	43.6	45.2	43.5	45.9	47.8	44.0	43.3	44.1	43.8	399.0
47,5°	43.6	42.9	41.9	41.4	39.4	39.4	41.9	43.2	41.2	40.8	43.5	44.7	443.6
50,0°	41.1	39.3	38.2	40.8	40.1	38.6	39.8	40.6	40.0	40.8	42.8	45.2	488.8
52,5°	40.0	37.3	34.7	37.5	39.3	38.2	37.0	37.3	38.2	38.2	37.5	45.0	533.9
55,0°	36.4	34.1	34.0	35.6	36.0	35.8	35.0	34.6	33.9	33.1	32.3	45.6	579.5
57,5°	34.9	32.7	32.4	32.4	31.9	32.6	32.5	32.0	32.2	31.9	30.9	46.9	626.4
60,0°	33.1	32.7	30.8	29.0	28.2	28.2	29.7	29.3	29.1	28.7	28.4	49.2	675.6
62,5°	28.6	29.9	30.1	27.4	25.9	24.9	25.4	25.9	25.8	24.4	23.2	50.3	725.8
65,0°	26.9	27.0	26.4	23.8	22.4	21.6	21.1	21.7	23.2	22.9	21.2	50.5	776.3
67,5°	27.2	24.7	21.6	20.1	20.1	19.6	18.4	18.1	19.9	20.0	18.7	51.1	827.4
70,0°	28.3	23.8	19.9	17.2	16.8	16.4	14.5	12.9	12.3	11.6	11.0	49.5	876.9
72,5°	26.1	22.1	18.7	12.5	8.3	7.5	6.2	4.8	4.0	3.7	3.6	44.5	921.5
75,0°	22.3	16.3	9.7	4.9	2.6	2.2	2.1	2.0	2.0	1.9	1.9	35.7	957.2
77,5°	11.6	6.0	3.5	2.2	1.7	1.5	1.4	1.3	1.2	1.0	0.7	23.1	980.3
80,0°	3.7	2.8	2.2	1.8	1.4	1.0	0.7	0.7	0.7	0.4	0.1	11.5	991.8
82,5°	2.8	2.2	1.6	1.3	1.0	0.7	0.5	0.4	0.4	0.2	0.1	5.0	996.8
85,0°	2.1	1.5	1.0	0.8	0.6	0.4	0.3	0.2	0.1	0.1	0.1	2.3	999.1
87,5°	0.8	0.6	0.4	0.3	0.2	0.2	0.1	0.1	0.1	0.0	0.0	0.9	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 mini LED	<b>Order number: 5XC2K51Y08HE</b> <b>EAN: 4058352991534</b>	<b>LP number</b> 59352_35
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	8200	58.1	60.6	59.4
95	241	252	7780	54.7	56.9	55.8
90	229	250	7393	51.5	53.6	52.6
85	216	248	6973	48.1	50.1	49.1
80	203	246	6554	44.9	46.7	45.8
75	190	243	6134	41.7	43.4	42.6
70	178	241	5746	38.8	40.3	39.6
65	165	238	5327	35.7	37.2	36.4
60	152	235	4907	32.7	34.0	33.4
55	140	232	4520	30.0	31.2	30.6
50	127	229	4100	27.1	28.1	27.6
45	114	225	3680	24.3	25.2	24.8
40	102	221	3293	21.7	22.5	22.1
35	89	216	2873	19.0	19.7	19.4
30	76	210	2454	16.4	17.0	16.7
25	63	203	2034	13.8	14.3	14.0
20	51	195	1646	11.4	11.8	11.6
15	38	184	1227	8.8	9.0	8.9
14	35	181	1130	8.2	8.4	8.3