

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12CN49XG EAN: 4058352928653	LP number 58524_288
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12CN49XG EAN: 4058352928653	LP number 58524_288
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.9	22.4	21.3	22.7	23.0	17.7	19.1	18.0	19.4	19.7
	3H	21.4	22.6	21.7	22.9	23.3	18.0	19.3	18.4	19.6	20.0
	4H	21.6	22.7	22.0	23.1	23.5	18.2	19.4	18.6	19.7	20.1
	6H	21.9	22.9	22.3	23.3	23.7	18.3	19.4	18.7	19.8	20.2
	8H	22.1	23.0	22.5	23.4	23.8	18.4	19.4	18.8	19.8	20.2
	12H	22.3	23.1	22.7	23.5	23.9	18.4	19.4	18.8	19.8	20.2
4H	2H	21.0	22.2	21.4	22.5	22.9	18.2	19.4	18.6	19.7	20.1
	3H	21.5	22.5	22.0	22.9	23.3	18.7	19.7	19.1	20.0	20.5
	4H	21.9	22.8	22.3	23.2	23.6	18.9	19.8	19.3	20.2	20.6
	6H	22.3	23.0	22.7	23.5	23.9	19.1	19.9	19.6	20.3	20.8
	8H	22.5	23.2	23.0	23.6	24.1	19.2	19.9	19.6	20.3	20.8
	12H	22.8	23.4	23.3	23.8	24.3	19.2	19.8	19.7	20.3	20.8
8H	4H	21.9	22.6	22.4	23.0	23.5	19.1	19.8	19.6	20.2	20.7
	6H	22.4	23.0	22.9	23.4	23.9	19.4	20.0	19.9	20.4	21.0
	8H	22.7	23.2	23.2	23.7	24.2	19.5	20.0	20.0	20.5	21.0
	12H	23.1	23.5	23.6	24.0	24.5	19.6	20.1	20.2	20.6	21.1
12H	4H	21.9	22.5	22.4	23.0	23.4	19.2	19.8	19.7	20.2	20.7
	6H	22.4	22.9	22.9	23.4	23.9	19.5	20.0	20.0	20.5	21.0
	8H	22.7	23.2	23.3	23.7	24.2	19.7	20.1	20.2	20.6	21.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	20375.0	21654.5	23701.1	21338.8	15146.7	11250.4	10448.6	
	50°	14589.0	15589.2	17410.8	15523.6	10863.8	8227.8	7830.0	
	55°	10683.7	11367.3	12705.0	11149.8	7932.9	6408.2	6343.2	
	60°	8174.8	8551.3	9330.6	8271.1	6145.4	5269.2	5415.1	
	65°	6716.7	6845.7	7091.8	6345.0	5042.7	4533.8	4777.7	
	70°	5972.9	5899.1	5666.2	5106.5	4347.3	4011.7	4309.8	
	75°	5710.1	5447.0	4845.1	4305.1	3838.5	3557.9	3869.6	
	80°	5772.5	5373.2	4508.7	3825.3	3453.8	3191.4	3440.1	
	85°	6103.0	5639.4	4573.4	3750.6	3299.8	2916.9	3106.5	

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12CN49XG EAN: 4058352928653	LP number 58524_288
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

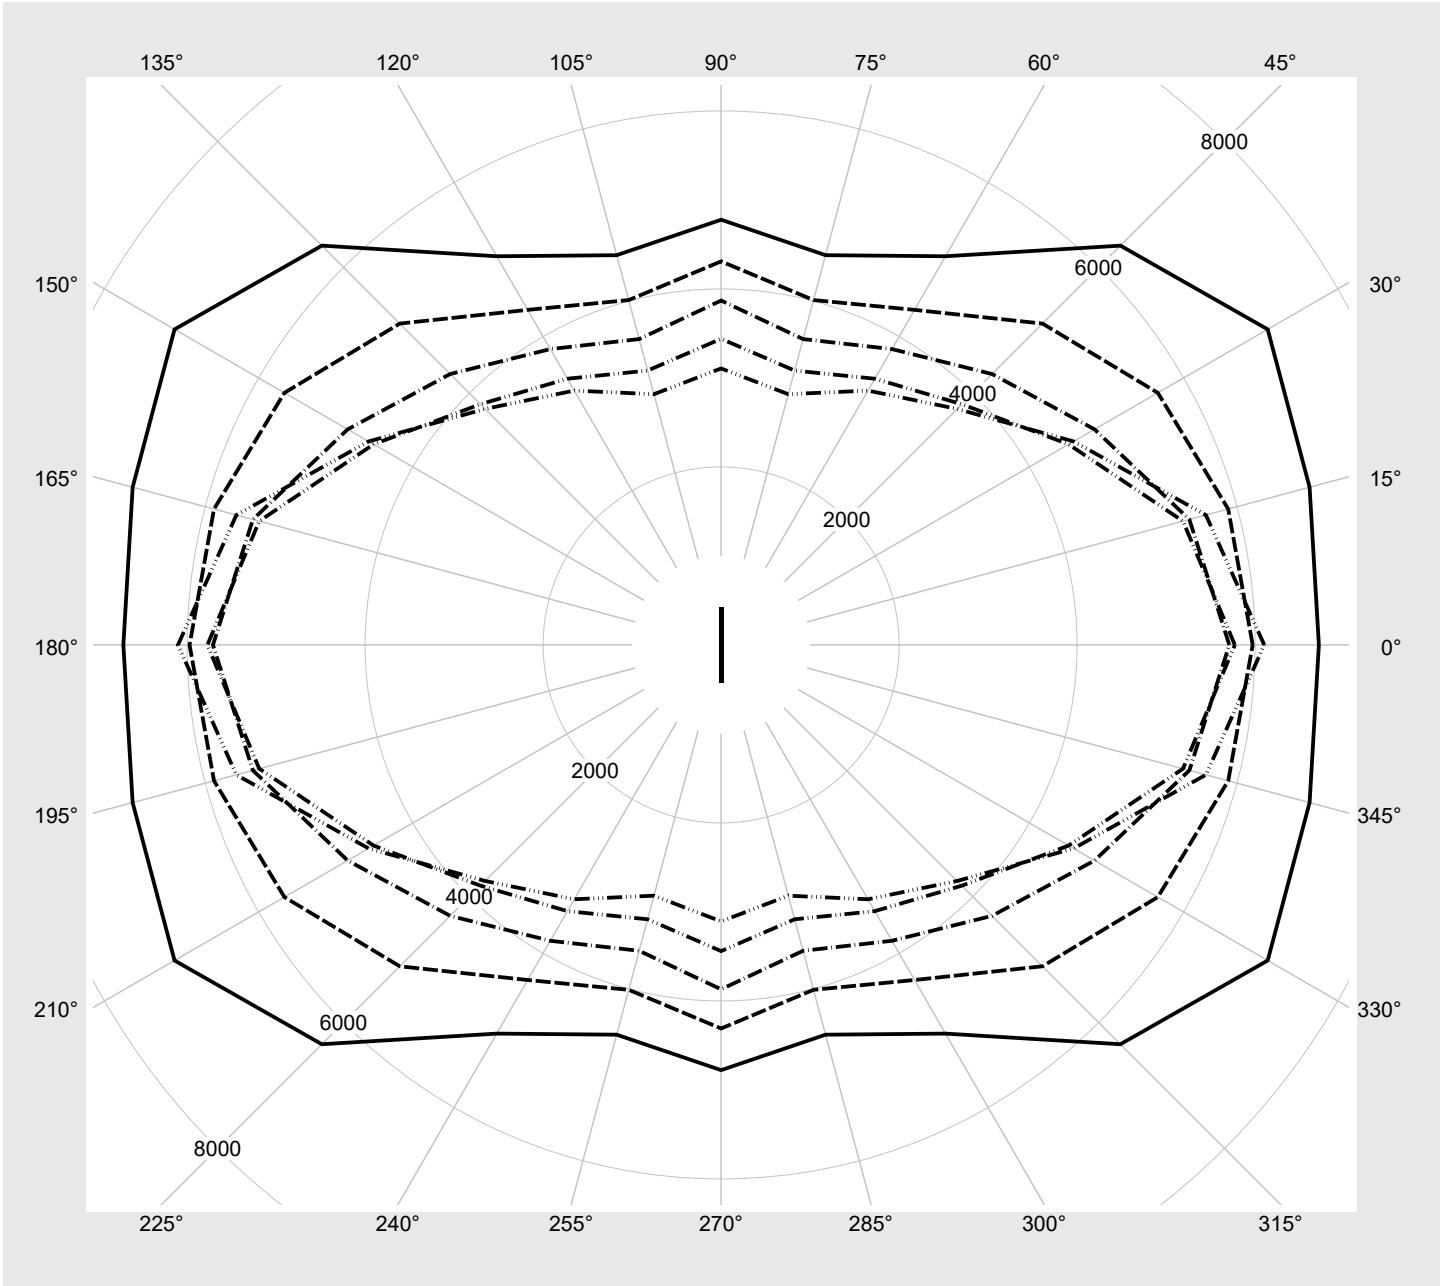

Photometric test report

Family Licross® 11 Protected	Order number: 51TD12CN49XG EAN: 4058352928653	LP number 58524_288
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	9070	49.4	55.3	52.4
2	A	C	F	8548	46.3	51.7	49.0
3	A	D	E	8016	43.1	48.1	45.6
4	A	D	F	7569	40.5	44.5	42.5
5	B	C	E	7026	37.4	41.8	39.6
6	B	C	F	6558	34.7	38.3	36.5
7	B	D	E	6015	31.8	35.2	33.5
8	B	D	F	5546	29.2	32.2	30.7