
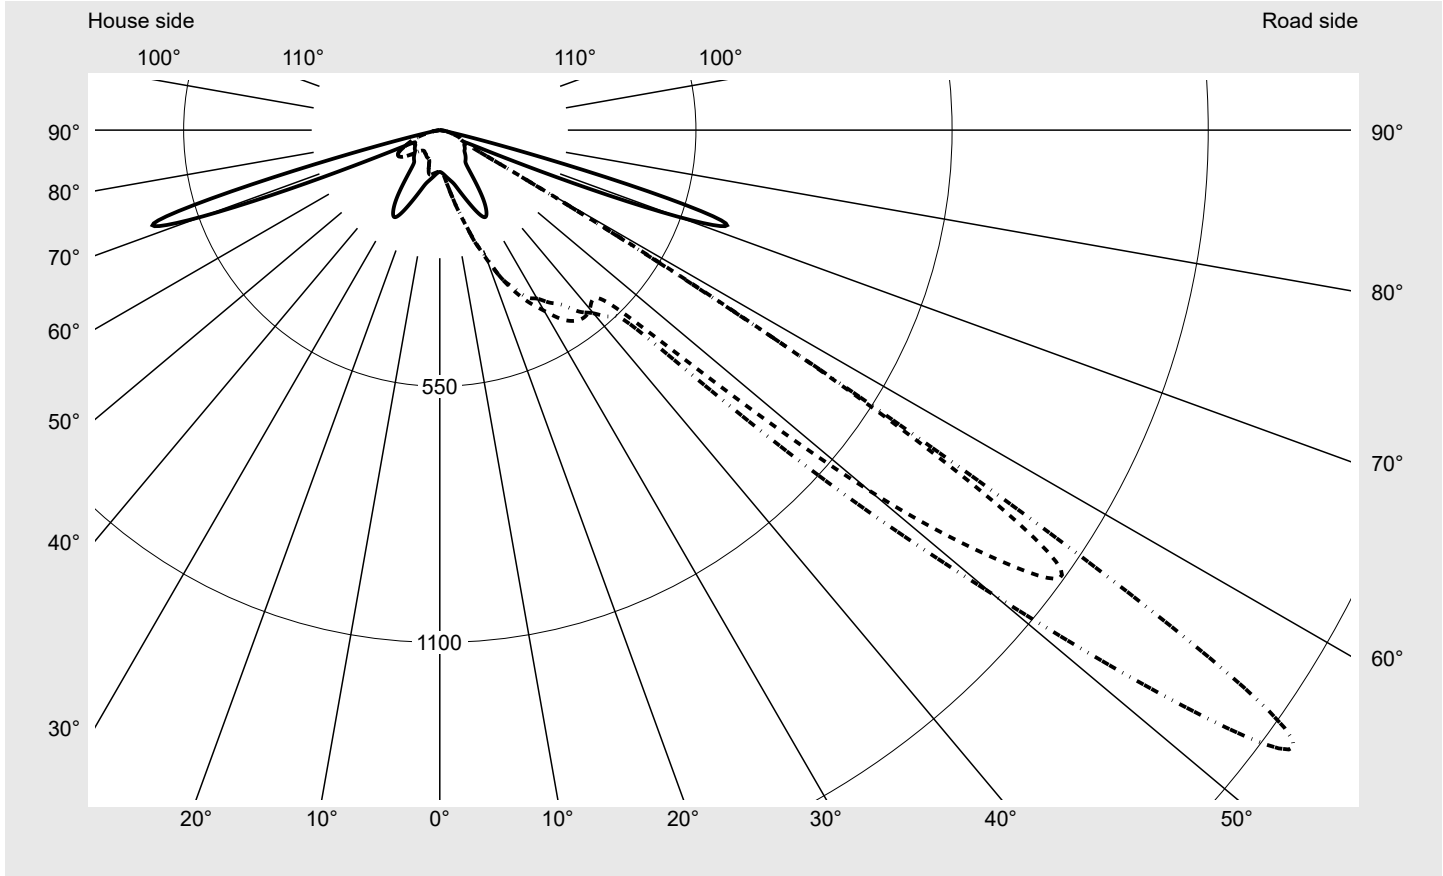


Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
	Version standard bracket Optic asymmetric distribution PL33 Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 160390 lm Power consumption = 1334.7 W Luminous efficacy = 120.2 lm/W	serial documentation 02.11.2023



Luminous intensity in cd/klm
C180-0
C265-85
C270-90
Imax: 2172 cd/klm



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	597.1
Imax 80°	17.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52,5°** **KMK 50°** **KMK 47,5°** **siteco**

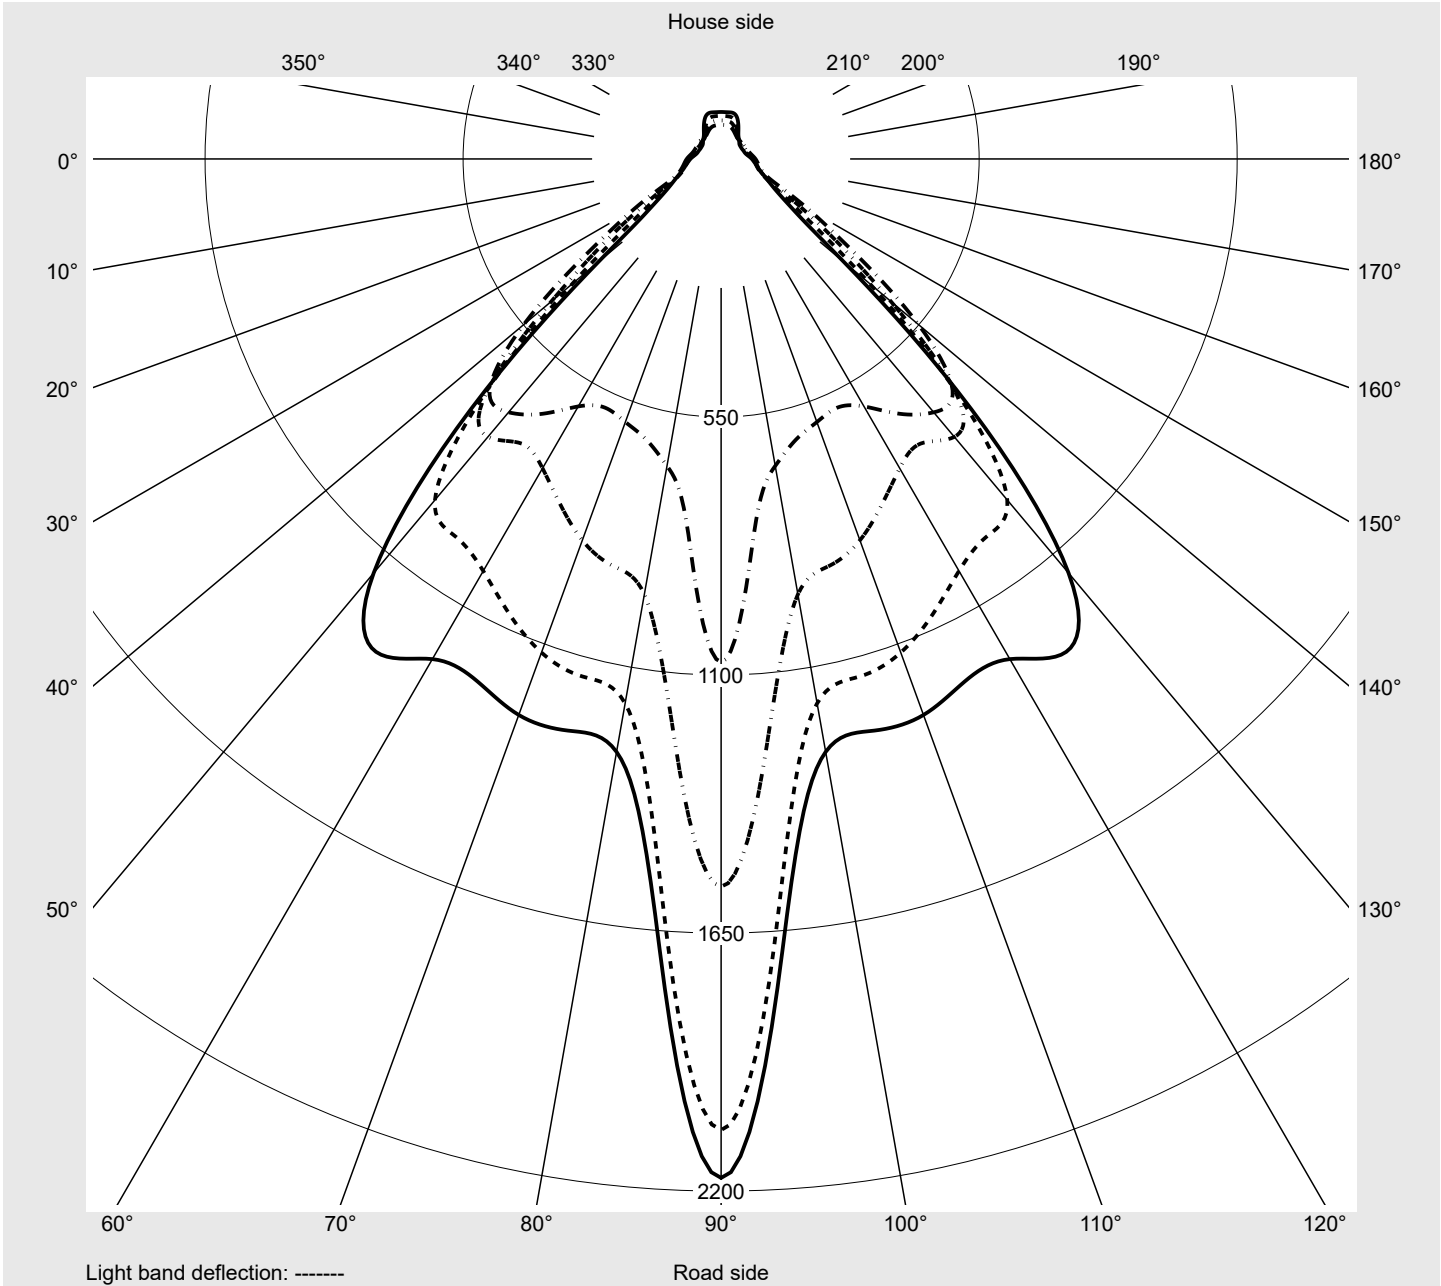

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
Table of values for luminous intensities		Maximum luminous intensity
		siteco


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	91.5	91.5	91.5	91.5	91.4	91.4	91.4	91.3	91.3	91.1	91.0	90.8	90.7
5,0°	95.2	95.2	95.2	95.2	95.2	95.3	95.3	95.5	95.7	96.0	96.3	96.5	96.8
7,5°	100.2	100.4	100.5	100.8	101.3	102.2	103.5	105.3	107.5	109.8	111.9	113.5	114.7
10,0°	105.8	106.2	107.0	108.6	111.6	116.4	122.5	129.1	135.2	140.2	143.8	145.7	146.4
12,5°	112.1	113.1	115.7	121.6	131.3	144.1	157.4	169.6	179.5	186.5	190.4	191.4	190.0
15,0°	120.4	122.6	128.8	141.9	160.7	181.8	202.2	219.9	233.4	242.1	245.8	245.1	241.2
17,5°	134.5	138.5	149.5	171.2	199.2	229.9	259.8	286.2	305.8	318.3	322.2	318.2	308.4
20,0°	152.8	158.9	175.6	206.0	243.9	283.9	321.1	353.7	381.0	403.2	416.3	417.4	403.5
22,5°	174.6	184.5	207.6	245.0	286.4	326.0	360.0	390.0	418.1	446.4	472.3	492.4	498.8
25,0°	197.6	211.8	239.8	280.3	323.3	362.1	394.1	421.8	448.3	473.9	499.0	523.6	544.2
27,5°	210.6	231.0	265.1	311.5	358.9	394.2	432.5	461.6	487.5	509.2	526.0	540.7	555.4
30,0°	199.9	224.4	264.4	318.7	373.6	420.8	461.4	497.4	526.8	545.2	553.0	555.1	555.9
32,5°	170.4	195.6	237.8	296.3	357.8	416.7	471.0	523.3	563.4	580.0	578.1	569.0	556.7
35,0°	125.9	145.1	184.1	244.4	313.8	385.9	456.6	529.2	591.2	613.1	600.8	579.7	557.3
37,5°	94.1	102.5	125.5	172.6	242.7	332.8	425.5	518.8	603.0	639.5	623.0	589.3	559.1
40,0°	85.7	90.2	99.2	122.6	168.2	254.5	372.1	499.6	603.2	659.3	649.4	603.5	559.7
42,5°	82.2	86.8	91.9	105.4	133.5	195.4	301.4	467.2	603.5	670.8	671.6	618.2	556.5
45,0°	78.1	82.7	87.0	94.8	113.2	162.3	246.8	402.6	593.1	680.7	686.3	637.4	564.7
47,5°	73.3	77.5	82.1	88.7	101.2	135.8	215.6	342.7	549.3	697.8	705.0	663.1	609.1
50,0°	69.1	73.5	77.9	83.6	94.0	118.1	177.3	287.9	472.3	710.1	773.4	740.8	761.4
52,5°	67.6	71.9	76.1	81.8	92.2	112.4	148.9	227.9	413.8	722.9	948.9	984.2	1014.1
55,0°	65.5	70.4	76.3	83.3	94.6	111.0	136.0	186.8	341.8	754.2	1152.2	1282.6	1231.0
57,5°	62.8	69.6	78.6	88.1	100.7	114.8	134.9	171.7	221.3	573.8	1000.2	1255.1	1253.7
60,0°	61.1	70.0	82.1	95.0	107.8	118.2	131.7	162.4	154.5	186.0	429.5	717.8	757.9
62,5°	61.7	73.7	88.4	102.5	113.0	115.9	116.9	134.3	133.0	93.1	107.9	177.8	237.9
65,0°	67.6	85.8	98.8	105.9	108.2	102.7	95.3	97.6	106.1	75.7	61.5	64.5	70.9
67,5°	202.1	253.8	217.4	146.6	99.5	80.2	71.1	66.2	68.4	61.9	51.6	51.2	52.0
70,0°	541.8	597.1	448.5	245.3	109.9	61.0	52.1	46.8	48.0	48.2	45.4	45.2	44.8
72,5°	615.2	573.0	359.3	204.2	107.4	49.3	37.3	35.4	37.3	38.7	38.3	38.0	37.0
75,0°	235.5	183.2	99.8	46.0	59.2	36.6	27.6	28.3	29.7	30.7	30.1	30.5	29.7
77,5°	41.7	38.1	28.1	25.3	26.3	21.8	20.4	21.4	22.4	23.0	22.9	23.1	22.8
80,0°	16.8	15.0	14.0	15.7	16.3	14.4	14.0	14.5	15.8	15.9	15.5	15.5	15.5
82,5°	9.2	8.4	8.4	9.0	9.8	8.5	8.6	8.7	9.0	9.1	8.8	9.1	9.1
85,0°	4.1	4.0	3.9	4.1	4.5	4.1	4.0	4.1	3.9	3.9	3.8	3.7	3.6
87,5°	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	90.6	90.5	90.5	90.5	90.5	91.0	91.5	91.4	91.4	91.3	91.1	90.9	90.8
5,0°	97.0	97.3	97.5	97.6	97.8	97.1	95.2	95.1	95.0	94.7	94.5	94.2	93.9
7,5°	115.3	115.6	115.6	115.5	115.4	115.6	100.2	100.0	99.8	99.5	99.1	98.7	98.2
10,0°	146.1	144.9	143.3	141.7	140.7	138.6	105.6	105.3	105.0	104.6	104.1	103.4	102.7
12,5°	186.9	182.6	178.1	174.1	171.5	171.1	111.6	111.1	110.6	110.0	109.2	108.4	107.5
15,0°	234.8	226.9	218.9	211.8	207.2	203.5	119.3	118.4	117.4	116.3	115.0	113.7	112.3
17,5°	295.5	281.5	268.1	256.9	249.9	253.2	132.0	129.4	127.2	124.7	122.1	119.6	117.2
20,0°	378.0	348.5	324.0	306.1	295.5	288.8	148.9	143.7	138.8	133.9	129.2	124.8	120.5
22,5°	483.5	442.8	394.0	359.9	342.6	342.5	167.4	159.4	150.6	142.1	134.3	127.2	117.8
25,0°	550.9	530.3	475.3	415.0	383.3	372.8	185.3	172.4	158.7	146.0	135.3	122.8	106.5
27,5°	568.0	568.5	541.2	474.2	418.0	404.5	192.6	174.7	157.4	143.0	129.9	111.7	90.8
30,0°	559.1	562.9	558.1	518.8	447.7	417.8	179.2	160.0	143.8	132.6	119.1	99.6	82.3
32,5°	545.2	540.7	542.3	535.6	479.5	439.2	151.0	135.0	124.0	117.5	107.2	93.8	80.9
35,0°	532.7	514.8	512.4	520.9	500.1	457.9	113.7	106.3	103.0	101.2	96.8	90.0	81.1
37,5°	526.3	498.0	489.1	503.8	507.6	491.0	89.5	87.2	87.0	87.2	88.3	85.8	79.6
40,0°	518.5	481.7	466.2	480.1	501.2	513.5	81.8	78.8	76.6	75.7	77.8	79.3	76.4
42,5°	507.6	465.9	442.4	452.3	490.2	542.3	77.9	74.4	71.1	68.4	68.1	70.6	70.5
45,0°	511.6	479.8	466.4	486.5	550.9	631.0	73.4	69.2	66.0	63.5	61.7	62.2	64.0
47,5°	585.1	596.8	618.7	664.4	802.2	1072.3	68.4	64.0	61.1	59.5	58.5	57.2	58.1
50,0°	811.9	865.0	897.1	942.5	1205.4	1551.1	64.0	59.7	57.3	56.0	55.3	54.2	54.0
52,5°	1069.4	1119.6	1142.1	1178.4	1521.9	2069.9	61.6	56.8	54.3	53.0	52.3	51.6	51.3
55,0°	1228.9	1261.2	1261.5	1283.4	1615.2	2171.9	60.0	55.1	52.1	50.8	49.5	49.0	49.2
57,5°	1152.5	1053.1	965.7	941.7	1046.1	1101.7	58.2	53.7	50.3	48.5	47.1	46.7	47.8
60,0°	663.1	519.9	400.3	320.4	250.2	237.0	55.2	52.5	49.2	47.0	46.3	46.7	49.1
62,5°	224.4	162.5	113.0	83.8	69.7	64.1	53.6	50.0	49.2	49.6	50.2	51.6	54.6
65,0°	69.9	62.0	56.1	53.5	51.6	52.0	55.0	49.9	51.9	55.1	58.6	61.6	63.8
67,5°	52.7	51.4	54.6	59.3	50.8	47.3	107.8	63.9	64.5	67.6	71.0	70.9	69.2
70,0°	45.5	46.1	72.5	82.0	52.1	42.8	265.1	114.3	76.8	71.5	67.9	62.6	57.9
72,5°	36.9	37.0	52.0	55.7	42.7	32.5	206.7	63.3	45.3	48.2	42.3	37.3	34.5
75,0°	29.1	28.7	34.3	37.2	30.5	25.1	69.9	29.5	25.0	25.6	24.2	23.1	23.3
77,5°	22.0	21.2	24.4	25.9	22.5	17.9	25.7	20.0	17.9	17.6	17.1	16.9	17.0
80,0°	15.1	14.5	15.9	16.4	14.7	13.0	16.8	14.1	12.4	11.8	11.4	11.2	11.1
82,5°	8.8	8.5	8.8	8.9	8.3	7.4	9.9	8.7	7.6	7.0	6.7	6.3	6.3
85,0°	3.5	3.4	3.3	3.3	3.2	3.4	4.2	4.0	3.6	3.2	3.0	2.9	2.7
87,5°	1.2	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	0.1	0.1
2,5°	90.6	90.4	90.2	90.1	90.0	89.9	89.9	89.9	89.9	89.8	89.9	1.1	1.2
5,0°	93.6	93.2	92.9	92.5	92.2	92.0	91.8	91.7	91.7	91.5	91.5	2.3	3.5
7,5°	97.6	96.9	96.3	95.7	95.2	94.7	94.3	94.1	93.8	93.6	93.6	3.7	7.2
10,0°	101.9	101.1	100.3	99.5	98.7	98.1	97.5	97.0	96.7	96.4	96.2	5.5	12.7
12,5°	106.5	105.5	104.3	103.2	102.2	101.2	100.2	99.4	98.7	98.0	97.7	7.9	20.6
15,0°	110.8	109.1	107.4	105.4	102.9	100.3	97.8	95.6	94.0	92.8	92.3	11.0	31.6
17,5°	114.8	111.6	105.9	98.3	90.9	85.4	81.8	79.6	78.0	76.7	76.0	14.8	46.4
20,0°	114.8	105.1	92.8	82.1	75.2	71.8	70.3	69.7	68.8	67.5	66.9	19.5	65.9
22,5°	104.2	88.8	77.3	72.6	70.6	69.0	67.8	67.3	66.7	65.8	65.3	24.7	90.6
25,0°	89.2	76.8	72.0	70.5	69.2	67.9	66.8	66.0	65.5	64.8	64.4	29.7	120.3
27,5°	76.9	70.8	69.7	69.0	68.1	67.1	65.7	64.4	63.5	62.8	62.4	34.3	154.6
30,0°	71.9	69.2	68.3	67.7	66.8	65.3	63.4	61.8	60.7	60.1	59.8	37.9	192.5
32,5°	72.4	68.3	66.8	65.7	64.4	62.9	61.3	59.8	59.0	58.6	58.3	40.3	232.9
35,0°	72.6	67.2	64.7	63.2	62.1	61.0	59.7	58.2	57.2	56.7	56.3	41.4	274.3
37,5°	72.1	65.4	62.2	61.1	60.5	59.3	58.2	57.2	56.6	56.1	55.8	41.9	316.2
40,0°	70.3	63.7	60.2	59.3	58.8	58.3	58.0	57.9	57.7	57.4	57.0	42.3	358.5
42,5°	66.7	61.7	58.5	57.7	58.1	59.0	59.7	60.3	60.6	60.2	59.9	42.9	401.5
45,0°	63.0	59.4	56.8	57.1	58.8	61.0	63.2	64.7	65.5	65.4	65.1	44.9	446.4
47,5°	59.3	57.2	56.0	57.5	60.6	64.6	68.7	71.4	72.5	72.7	72.5	51.9	498.3
50,0°	55.3	55.8	56.0	58.7	63.7	70.2	76.5	80.7	81.8	82.1	82.1	64.5	562.8
52,5°	52.4	54.9	56.6	60.9	68.2	77.5	86.3	91.1	92.0	91.9	92.0	79.7	642.5
55,0°	50.7	54.7	58.4	64.1	73.8	85.8	96.4	101.2	100.9	100.2	100.1	90.6	733.1
57,5°	50.6	55.4	61.1	68.5	80.1	93.6	104.7	108.4	106.3	104.5	104.1	77.5	810.6
60,0°	52.8	58.4	66.7	74.1	84.9	98.4	108.8	110.7	106.6	103.7	103.1	43.6	854.2
62,5°	58.4	65.0	80.6	89.5	87.7	99.2	107.7	107.4	101.3	97.4	96.4	23.9	878.1
65,0°	65.8	71.8	102.3	119.4	92.6	95.1	100.2	97.4	89.2	84.4	83.0	19.4	897.6
67,5°	68.0	70.4	111.1	138.4	101.7	85.1	85.3	81.6	74.2	71.7	69.5	22.2	919.7
70,0°	55.5	55.7	82.1	117.3	93.8	75.8	73.7	69.5	61.4	61.7	58.0	29.7	949.4
72,5°	36.4	39.0	47.1	64.2	63.4	60.8	59.8	54.4	47.5	49.2	46.7	24.9	974.3
75,0°	25.7	29.6	34.7	40.9	45.3	45.0	43.1	36.9	32.0	34.4	33.0	12.1	986.4
77,5°	18.1	21.0	23.8	26.7	29.4	30.9	29.2	24.5	21.7	22.1	21.7	6.3	992.8
80,0°	11.4	12.8	14.5	15.8	16.7	17.6	15.7	13.6	12.3	11.6	11.4	3.9	996.7
82,5°	6.4	6.8	7.3	7.3	7.8	7.8	6.6	5.8	5.3	5.1	5.1	2.1	998.8
85,0°	2.6	2.6	2.4	2.3	2.0	1.9	2.0	2.0	2.0	2.0	2.0	0.9	999.7
87,5°	1.0	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
----------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 10°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	160390	1334.7
95	234	251	152553	1226.1
90	216	248	144403	1128.3
85	200	245	136260	1042.2
80	184	242	128342	955.4
75	169	239	120240	874.9
70	156	236	112221	805.6
65	142	233	104059	731.9
60	129	229	96028	663.8
55	118	226	88187	607.1
50	104	221	80333	533.5
45	93	217	72311	476.9
40	81	212	63895	415.7
35	70	207	55950	358.8
30	60	201	48381	308.2
25	48	193	39727	247.7
20	39	185	32376	203.1
15	28	173	23778	149.1
10	19	159	16147	104.7
5	9	132	8072	56.3
1	2	77	2179	20.5

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
90	214	248	138617	1109.6
90	212	248	137862	1098.9
85	196	245	130239	1012.8
80	180	242	122348	926.7
75	165	238	114741	846.8
70	151	235	107048	772.9
65	138	232	99317	704.8
60	126	228	91984	642.9
55	114	225	84056	579.8
50	101	220	76868	512.9
45	90	216	68947	457.1
40	79	211	61397	401.3
35	68	206	53678	345.0
30	58	200	46059	294.9
25	47	192	38233	240.2
20	37	184	30504	191.2
15	27	172	22739	142.4
10	18	157	15487	98.5
5	9	132	7999	55.6
1	2	77	2161	20.2

Photometric test report

Family Floodlight FL11	Order number: 5XA779125G01AA EAN: 4058352850947	LP number 59242_10
----------------------------------	--	------------------------------

Luminousfluxs table	siteco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	160390.0	1334.7
25.0	139130.0	1116.9