


# Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
	<b>Version</b> standard bracket <b>Optic</b> asymmetric distribution PL33T <b>Cover</b> toughened safety glass <b>Lamps</b> LED 5700 K   CRI ≥ 80 <b>Controlgear</b> ECG-DMX <b>Rated values</b> Ta = 10 °C Net luminous flux = 151430 lm Power consumption = 1388.0 W Luminous efficacy = 109.1 lm/W	<b>serial documentation</b> <b>02.11.2023</b>



**Luminous intensity in cd/klm** C180-0 C240-60 C245-65 C270-90 **Imax: 1512 cd/klm**

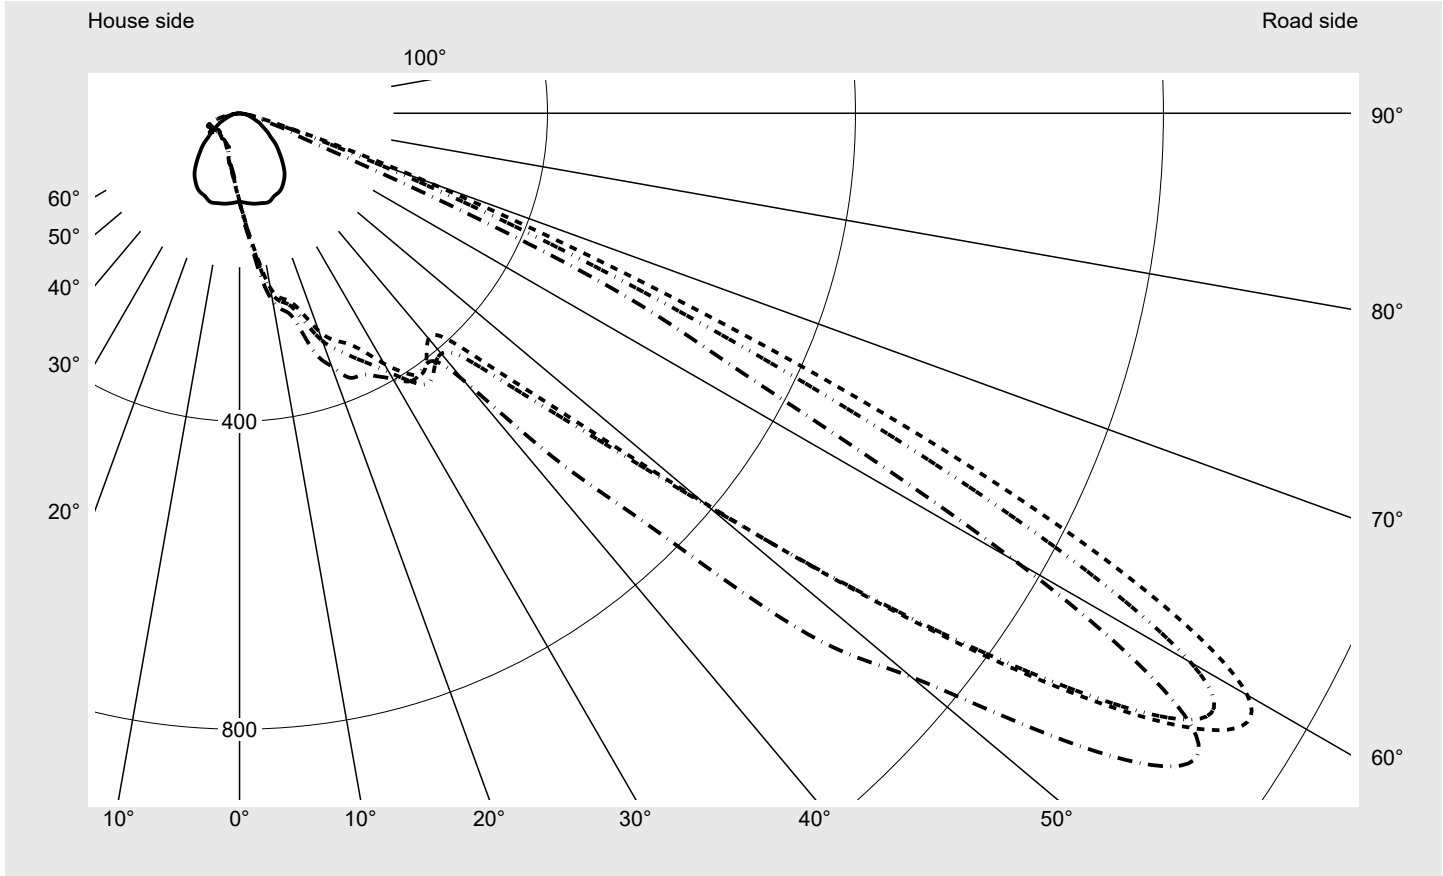

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G6
Imax 70°	293.1
Imax 80°	14.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
-----------------------------------------	------------------------------------------------------------------	-------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

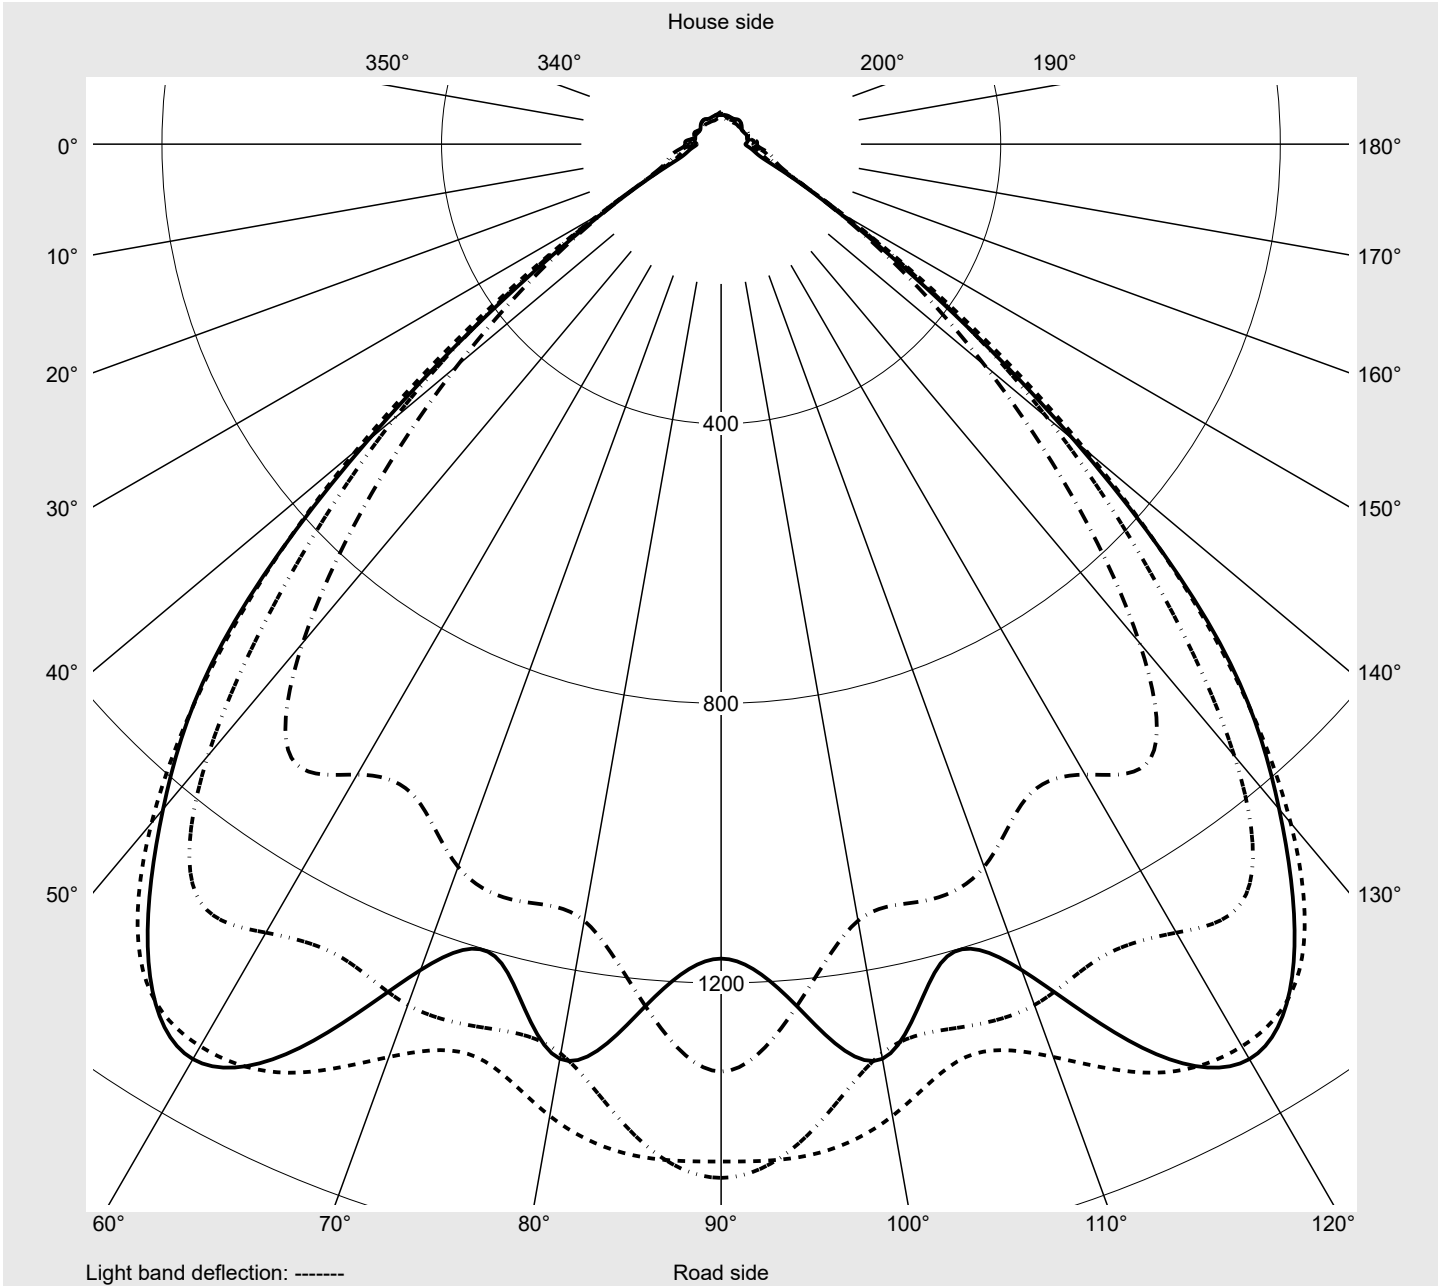

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	115.9	117.8	119.7	121.5	123.4	125.2	127.0	128.8	130.5	131.9	133.2	134.2	135.3
5,0°	117.1	121.3	125.6	129.8	134.2	138.3	142.4	146.4	150.1	153.5	156.8	159.9	162.8
7,5°	118.3	124.1	130.4	136.4	142.6	148.8	155.3	162.1	168.8	175.4	182.2	189.0	195.4
10,0°	119.3	126.8	134.5	142.4	151.3	160.9	171.1	181.6	192.6	203.6	214.1	223.0	230.3
12,5°	119.8	129.0	139.4	150.3	162.7	175.1	187.4	200.1	212.5	223.0	231.9	239.5	245.6
15,0°	120.7	131.9	144.3	157.2	170.3	183.2	196.8	209.8	221.1	230.4	238.2	245.7	253.1
17,5°	121.5	133.8	147.1	160.7	173.9	188.6	203.4	216.6	227.5	236.8	246.9	259.4	272.5
20,0°	119.8	133.6	147.5	161.2	176.3	193.1	210.5	225.9	238.6	250.8	266.8	284.5	300.8
22,5°	116.8	131.1	146.6	161.5	178.5	197.9	218.3	235.9	249.3	265.0	286.2	304.9	318.7
25,0°	115.3	128.1	142.9	160.9	179.9	199.8	221.6	240.6	253.5	271.5	293.5	312.2	329.9
27,5°	113.7	125.3	137.4	158.3	178.2	198.8	220.7	242.0	257.3	277.0	300.8	326.5	348.4
30,0°	110.6	122.0	132.5	153.9	175.5	195.6	219.8	248.1	269.8	294.7	324.9	355.7	375.6
32,5°	106.2	118.6	127.7	149.6	171.9	193.1	222.3	256.7	284.7	313.1	348.5	381.3	399.7
35,0°	101.5	113.9	123.3	144.5	166.4	191.2	224.8	260.7	291.8	321.5	358.8	390.8	413.1
37,5°	95.8	106.4	118.0	137.5	159.7	186.2	223.8	257.5	285.2	314.5	349.5	379.3	399.0
40,0°	88.4	96.3	109.5	127.9	150.5	179.8	220.9	250.8	275.3	305.2	341.3	364.0	382.1
42,5°	81.0	87.2	100.4	118.1	139.5	173.8	220.1	250.3	278.2	318.0	358.6	378.8	396.9
45,0°	73.5	78.9	93.2	111.7	132.2	169.5	220.8	256.6	301.2	362.9	416.9	458.3	472.5
47,5°	66.9	72.2	87.1	103.0	121.1	156.3	209.4	261.0	334.8	427.1	526.9	585.7	591.5
50,0°	59.9	61.5	73.3	85.5	98.0	128.1	188.1	269.9	388.8	533.6	698.5	798.8	784.9
52,5°	51.4	55.5	67.8	77.4	87.6	117.4	189.0	316.2	492.3	707.7	931.2	1071.9	1041.5
55,0°	46.1	50.5	62.6	70.6	82.4	114.7	200.7	369.8	609.3	871.2	1142.3	1309.8	1302.6
57,5°	40.2	43.9	54.3	62.0	75.5	111.5	202.5	390.4	681.2	999.1	1267.7	1442.4	1490.3
60,0°	34.9	38.5	45.2	52.9	69.0	109.8	191.1	356.9	660.3	1008.6	1242.1	1428.2	1511.5
62,5°	30.9	33.3	37.7	44.9	59.8	97.7	158.8	278.0	512.4	813.0	1008.6	1237.1	1295.6
65,0°	26.8	28.7	32.7	39.5	49.3	73.0	115.3	190.6	336.2	538.9	731.9	943.1	924.7
67,5°	21.4	22.4	26.6	32.5	40.3	52.1	74.3	113.3	187.7	307.0	459.4	575.1	534.1
70,0°	18.4	18.3	20.4	27.2	35.3	42.2	54.2	70.0	98.5	151.6	233.9	293.1	253.9
72,5°	15.1	15.5	16.6	21.9	28.1	33.3	38.7	45.1	54.2	70.0	91.0	111.2	98.9
75,0°	12.7	13.1	13.5	16.2	20.2	22.7	25.8	26.8	30.7	34.4	39.7	46.0	41.9
77,5°	10.1	10.8	11.0	12.3	14.2	15.1	15.9	16.2	17.8	19.7	22.3	24.9	23.6
80,0°	8.4	8.0	8.3	9.8	9.4	9.6	9.4	9.8	10.8	11.4	13.1	13.8	13.3
82,5°	7.0	5.9	5.3	6.3	6.1	5.6	5.1	5.5	5.8	6.2	7.1	7.3	6.9
85,0°	3.7	3.0	2.5	2.5	2.4	2.3	2.4	2.4	2.4	2.7	3.0	3.1	3.0
87,5°	0.8	0.7	0.7	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1
2,5°	136.2	136.9	137.5	138.0	138.4	142.8	114.0	112.3	110.6	109.1	107.4	106.0	104.6
5,0°	165.4	167.6	169.5	171.1	172.2	171.0	113.1	109.5	106.2	103.1	100.1	97.4	95.0
7,5°	201.0	205.3	208.7	211.4	213.4	215.0	112.7	107.4	102.5	98.0	94.0	90.4	87.2
10,0°	236.0	240.3	243.5	245.8	247.5	247.6	112.1	105.5	99.3	93.5	88.3	84.2	80.7
12,5°	250.6	254.2	257.0	259.0	260.5	262.0	111.2	103.1	95.7	89.2	83.4	79.0	75.2
15,0°	259.9	265.8	271.3	275.8	279.2	278.8	110.3	100.9	92.7	84.9	78.0	72.5	68.3
17,5°	285.5	297.2	307.1	314.2	319.2	326.4	109.2	97.1	87.1	79.6	73.0	67.5	63.4
20,0°	314.7	325.4	334.0	341.6	348.0	349.8	105.4	93.1	83.4	75.1	68.0	63.2	59.8
22,5°	332.6	346.4	355.5	362.2	367.7	371.6	103.2	90.0	78.9	70.2	63.8	59.2	54.4
25,0°	349.6	366.6	373.1	374.0	374.3	375.0	100.0	85.6	75.1	66.7	60.4	54.2	50.4
27,5°	367.3	384.2	392.0	390.8	385.7	384.9	95.1	80.6	71.4	63.5	56.4	50.9	48.3
30,0°	388.4	402.0	408.5	405.1	400.6	398.3	90.6	76.8	67.6	60.3	52.7	49.0	46.5
32,5°	412.6	421.2	419.2	410.7	409.5	412.7	86.7	73.1	63.8	55.8	50.5	47.5	45.2
35,0°	428.1	430.1	422.3	413.7	409.5	410.4	81.8	68.6	59.9	52.5	48.9	46.0	43.9
37,5°	416.0	425.5	416.3	408.9	404.6	406.4	77.3	64.4	54.5	49.5	47.0	44.4	41.9
40,0°	407.7	426.0	429.6	432.6	448.4	453.6	72.2	59.3	50.5	47.0	44.7	43.3	41.0
42,5°	430.0	468.1	493.4	521.0	564.8	614.1	67.5	54.0	47.4	44.9	43.5	41.8	40.0
45,0°	506.8	568.7	617.4	667.9	736.7	770.1	63.9	50.2	44.9	43.1	41.9	40.2	39.1
47,5°	619.7	699.6	761.5	806.6	904.7	1001.9	59.8	47.0	42.7	41.3	40.7	39.2	38.1
50,0°	792.7	875.4	920.3	947.6	1059.0	1139.0	55.3	44.0	39.8	39.7	39.2	37.8	36.6
52,5°	1032.6	1100.3	1120.9	1128.1	1238.5	1326.8	50.6	42.4	38.7	38.9	38.1	36.6	35.8
55,0°	1284.2	1310.6	1308.7	1321.2	1422.9	1478.9	47.3	42.0	40.0	41.0	41.2	38.2	37.2
57,5°	1465.8	1389.8	1352.1	1411.8	1451.9	1455.5	42.5	40.2	39.8	40.9	39.4	38.4	36.9
60,0°	1426.5	1257.4	1213.4	1328.7	1237.4	1165.2	37.7	37.8	38.2	38.5	37.2	36.4	36.3
62,5°	1124.2	952.3	945.6	1015.6	907.5	758.4	32.6	35.1	36.2	35.5	35.2	35.0	35.6
65,0°	735.3	603.2	614.9	613.5	555.9	513.8	29.2	32.1	33.4	32.9	32.3	33.3	35.5
67,5°	404.6	331.1	313.7	259.8	206.8	151.5	25.9	27.8	29.6	28.7	30.2	31.6	34.3
70,0°	183.2	158.3	140.3	92.9	73.1	71.8	20.7	21.8	22.6	24.0	27.9	28.8	31.4
72,5°	77.7	68.3	56.4	42.9	38.2	35.3	16.4	17.8	19.1	20.5	24.8	25.7	26.6
75,0°	37.3	34.1	29.2	25.1	22.7	23.4	13.2	14.6	15.6	17.3	20.5	21.5	21.5
77,5°	21.7	20.1	17.6	15.8	14.7	13.9	10.4	11.6	12.6	13.5	15.4	17.0	16.4
80,0°	11.9	11.2	10.4	9.9	9.5	9.7	8.1	8.6	9.0	9.9	10.8	12.4	12.4
82,5°	6.1	5.9	5.8	5.6	5.6	5.4	6.2	6.7	6.8	7.0	7.8	8.3	8.9
85,0°	2.9	2.9	2.9	2.8	2.8	2.9	3.3	3.0	3.5	3.3	3.2	3.5	3.7
87,5°	1.3	1.3	1.3	1.4	1.4	1.4	0.7	0.8	0.9	1.0	1.0	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	115.1	0.2	0.2
2,5°	103.3	102.1	100.9	99.9	99.0	98.3	97.7	97.3	97.0	96.7	96.6	1.4	1.6
5,0°	92.7	90.7	88.9	87.4	86.1	85.0	84.1	83.3	82.8	82.3	82.2	2.9	4.5
7,5°	84.5	82.1	80.1	78.4	76.9	75.8	74.9	74.3	73.9	73.6	73.5	4.7	9.1
10,0°	77.7	75.3	73.2	71.4	69.9	68.8	68.0	67.5	67.3	67.1	67.1	6.6	15.7
12,5°	72.0	69.2	67.0	65.2	63.9	63.0	62.6	62.4	62.2	61.9	61.7	8.5	24.2
15,0°	65.1	62.2	59.6	57.8	56.6	55.2	53.8	53.0	52.6	52.5	52.5	10.2	34.5
17,5°	60.4	57.7	54.7	51.7	50.6	50.0	49.1	48.2	46.8	46.1	45.9	12.3	46.8
20,0°	56.1	51.9	49.8	48.9	48.2	47.1	46.5	45.5	45.1	44.9	44.9	14.6	61.4
22,5°	50.6	48.6	47.4	46.3	45.4	44.5	43.6	43.1	43.1	43.1	43.1	16.8	78.2
25,0°	48.3	46.7	44.9	43.9	43.0	41.8	41.3	41.2	41.3	41.5	41.9	18.7	96.9
27,5°	46.3	44.4	42.8	41.9	40.1	39.8	39.8	39.8	40.1	40.8	40.9	20.7	117.7
30,0°	44.9	42.5	41.4	39.6	39.0	38.7	38.7	38.8	39.1	39.6	39.8	23.0	140.7
32,5°	42.8	41.6	40.5	38.7	38.0	38.0	38.1	38.4	38.9	39.3	39.7	25.3	166.0
35,0°	41.7	40.8	39.1	38.2	38.0	38.0	37.9	38.3	39.2	39.9	39.9	27.2	193.2
37,5°	41.2	40.4	38.9	38.2	38.2	38.1	38.2	38.3	38.4	38.7	38.9	28.2	221.3
40,0°	40.5	39.4	38.4	38.1	38.0	37.7	37.7	37.7	38.0	38.4	38.6	29.5	250.8
42,5°	39.5	38.5	37.4	37.2	37.0	37.0	37.1	37.1	37.4	38.4	37.8	33.0	283.9
45,0°	38.8	37.7	36.5	36.3	36.0	36.1	36.3	36.4	36.8	37.3	37.7	39.5	323.4
47,5°	36.8	36.2	36.2	35.5	35.2	35.2	35.5	35.7	36.4	36.1	40.5	47.9	371.2
50,0°	35.8	34.8	35.3	35.7	34.9	34.8	35.1	34.9	35.9	37.0	35.8	58.3	429.6
52,5°	36.1	35.5	35.9	35.8	35.4	35.3	35.3	35.2	36.5	37.5	37.4	73.4	503.0
55,0°	36.8	37.5	38.4	39.5	38.7	37.7	37.4	37.9	39.8	42.1	43.7	89.3	592.2
57,5°	37.8	40.4	41.8	42.8	41.3	40.1	40.2	41.0	42.5	43.9	46.0	98.7	691.0
60,0°	38.3	40.9	42.4	42.7	41.4	40.4	40.7	41.5	42.0	41.7	41.5	95.6	786.5
62,5°	38.5	41.4	43.6	42.8	41.5	41.1	42.1	42.4	40.9	39.6	39.1	78.4	865.0
65,0°	38.9	42.2	43.9	43.2	42.3	43.1	44.6	43.3	41.2	39.1	40.2	55.8	920.7
67,5°	38.1	41.4	42.4	42.4	43.0	44.6	44.7	43.1	40.9	40.6	40.3	33.0	953.7
70,0°	34.7	37.9	36.2	38.0	40.2	42.8	43.5	41.9	40.7	40.0	39.1	18.6	972.3
72,5°	27.3	28.5	30.5	33.0	36.3	38.1	39.3	37.1	35.0	34.4	30.3	10.5	982.8
75,0°	21.5	22.7	25.0	27.9	31.1	33.0	31.5	27.7	25.5	23.7	22.1	6.7	989.5
77,5°	16.4	15.9	18.5	19.9	24.2	24.4	23.3	21.2	17.3	13.8	12.4	4.5	994.0
80,0°	10.3	10.5	12.0	12.9	13.4	14.2	14.2	12.8	10.8	10.9	10.0	2.9	996.9
82,5°	7.6	7.7	8.7	9.1	8.6	9.6	9.3	8.4	7.7	8.0	8.0	1.9	998.8
85,0°	3.8	3.9	4.2	4.1	3.7	3.8	3.5	3.3	3.2	3.6	3.9	0.9	999.7
87,5°	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.8	1.9	1.9	2.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family  
Floodlight FL11

Order number: 5XA779228F01AA  
EAN: 4058352825563

LP number  
59254\_87

## Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
100	254	151117	1382.4
95	233	143780	1264.3
90	215	136418	1163.2
85	198	128540	1068.0
80	182	120972	978.3
75	168	113601	900.3
70	154	105727	823.1
65	141	98589	752.1
60	128	90951	681.5
55	116	82969	616.8
50	103	75602	546.5
45	92	68489	488.0
40	80	60358	424.6
35	69	52763	366.1
30	59	45581	313.4
25	48	38240	255.9
20	38	30179	204.6
15	28	22700	153.8
10	19	15244	107.9
5	9	7696	57.8
1	2	2071	20.9

## Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
92	217	132937	1165.8
90	211	130511	1132.2
85	195	123409	1043.3
80	179	116362	953.9
75	164	108999	870.8
70	151	101717	799.6
65	137	94239	723.8
60	124	86810	653.9
55	113	79538	594.7
50	100	72853	525.4
45	89	65286	467.4
40	78	58089	409.8
35	67	50636	351.5
30	57	43426	299.6
25	46	35957	242.9
20	37	29135	197.3
15	27	21730	147.0
10	18	14625	101.6
5	9	7631	57.1
1	2	2054	20.6

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779228F01AA</b> <b>EAN: 4058352825563</b>	<b>LP number</b> <b>59254_87</b>
-----------------------------------------	------------------------------------------------------------------	-------------------------------------

**Luminousfluxs table**



Temperature °C	Luminous flux lm	Power consumption W
10.0	151430.0	1388.0
25.0	133180.0	1169.3