
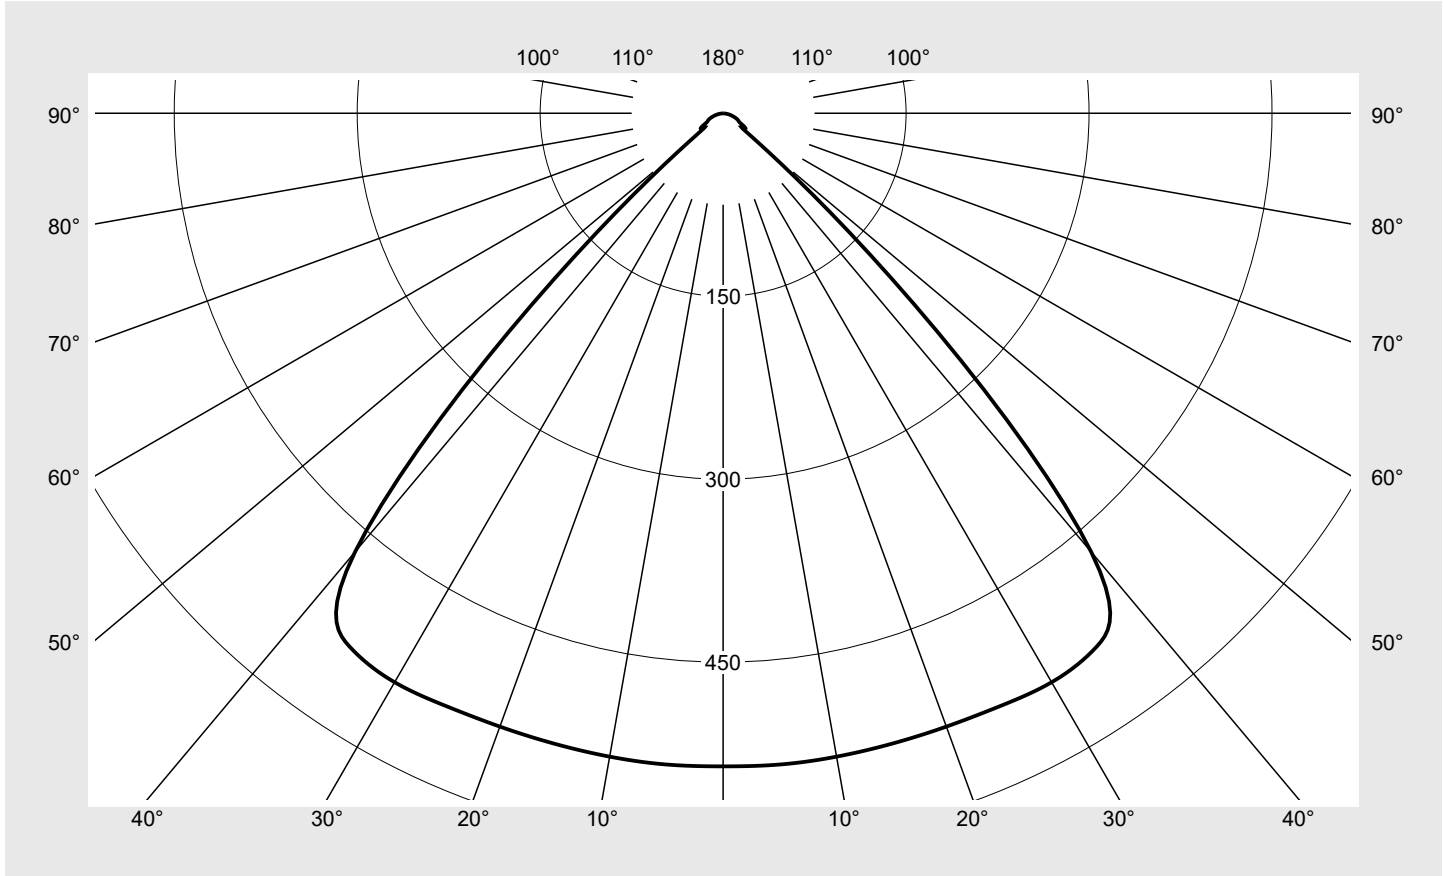


# Photometric test report

<b>Family</b> <b>Highbay 31</b>	<b>Order number: 51HC42DA4MMC</b> <b>EAN: 4069025251220</b>	<b>LP number</b> <b>59125_8</b>
	<b>Version</b> primary light control with lens, PC, clear, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 28000 lm Power consumption = 165.0 W Luminous efficacy = 169.7 lm/W	<b>serial documentation</b> <b>04.12.2024</b>



**Luminous intensity in cd/klm** C180-0 **Imax: 539 cd/klm**



Classifications	
DIN 5040	A 6 0
CIE	N1=83 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 31	Order number: 51HC42DA4MMC EAN: 4069025251220	LP number 59125_8
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	535.4	3.2	3.2
5°	535.9	25.6	28.8
10°	535.6	51.0	79.8
15°	535.1	75.9	155.7
20°	535.1	100.3	256.0
25°	536.5	124.3	380.3
30°	538.6	147.6	527.9
35°	533.9	167.9	695.8
40°	469.4	165.4	861.2
45°	221.6	85.9	947.0
50°	39.7	16.7	963.7
55°	21.6	9.7	973.4
60°	16.7	7.9	981.3
65°	13.5	6.7	988.0
70°	10.5	5.4	993.4
75°	7.1	3.8	997.2
80°	3.9	2.1	999.3
85°	1.3	0.7	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

## Photometric test report

Family Highbay 31	Order number: 51HC42DA4MMC EAN: 4069025251220	LP number 59125_8
----------------------	--	----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.5	25.8	24.9	26.2	26.5	24.5	25.8	24.9	26.2	26.5
	3H	24.4	25.6	24.8	26.0	26.3	24.4	25.6	24.8	26.0	26.3
	4H	24.4	25.5	24.8	25.9	26.2	24.4	25.5	24.8	25.9	26.2
	6H	24.4	25.4	24.8	25.7	26.1	24.4	25.4	24.8	25.7	26.1
	8H	24.4	25.3	24.8	25.7	26.1	24.4	25.3	24.8	25.7	26.1
	12H	24.4	25.2	24.8	25.6	26.0	24.4	25.2	24.8	25.6	26.0
4H	2H	24.3	25.4	24.7	25.8	26.2	24.3	25.4	24.7	25.8	26.2
	3H	24.3	25.2	24.7	25.6	26.0	24.3	25.2	24.7	25.6	26.0
	4H	24.3	25.1	24.7	25.5	25.9	24.3	25.1	24.7	25.5	25.9
	6H	24.2	24.9	24.7	25.4	25.8	24.2	24.9	24.7	25.4	25.8
	8H	24.2	24.8	24.7	25.3	25.8	24.2	24.8	24.7	25.3	25.8
	12H	24.2	24.7	24.7	25.2	25.7	24.2	24.7	24.7	25.2	25.7
8H	4H	24.2	24.8	24.7	25.3	25.7	24.2	24.8	24.7	25.3	25.7
	6H	24.2	24.7	24.7	25.1	25.7	24.2	24.7	24.7	25.1	25.7
	8H	24.1	24.6	24.7	25.1	25.6	24.1	24.6	24.7	25.1	25.6
	12H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5
12H	4H	24.2	24.7	24.7	25.2	25.7	24.2	24.7	24.7	25.2	25.7
	6H	24.1	24.6	24.7	25.1	25.6	24.1	24.6	24.7	25.1	25.6
	8H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 376
-----------------	---------------------------------	-------------------------------	---------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	79010.2
50°	15570.6
55°	9496.3
60°	8416.9
65°	8062.4
70°	7717.3
75°	6906.9
80°	5651.9
85°	3793.1

**Photometric test report**

<b>Family</b> Highbay 31	<b>Order number: 51HC42DA4MMC</b> <b>EAN: 4069025251220</b>	<b>LP number</b> 59125_8
-----------------------------	--	-----------------------------



**Luminance values in cd/m<sup>2</sup>**    γ 65°    γ 70°    γ 75°    γ 80°    γ 85°

