




Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
	Version primary light control with lens, PMMA, housing, white, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 38000 lm Power consumption = 197.7 W Luminous efficacy = 192.2 lm/W	serial documentation 24.02.2025
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 920 cd/klm**

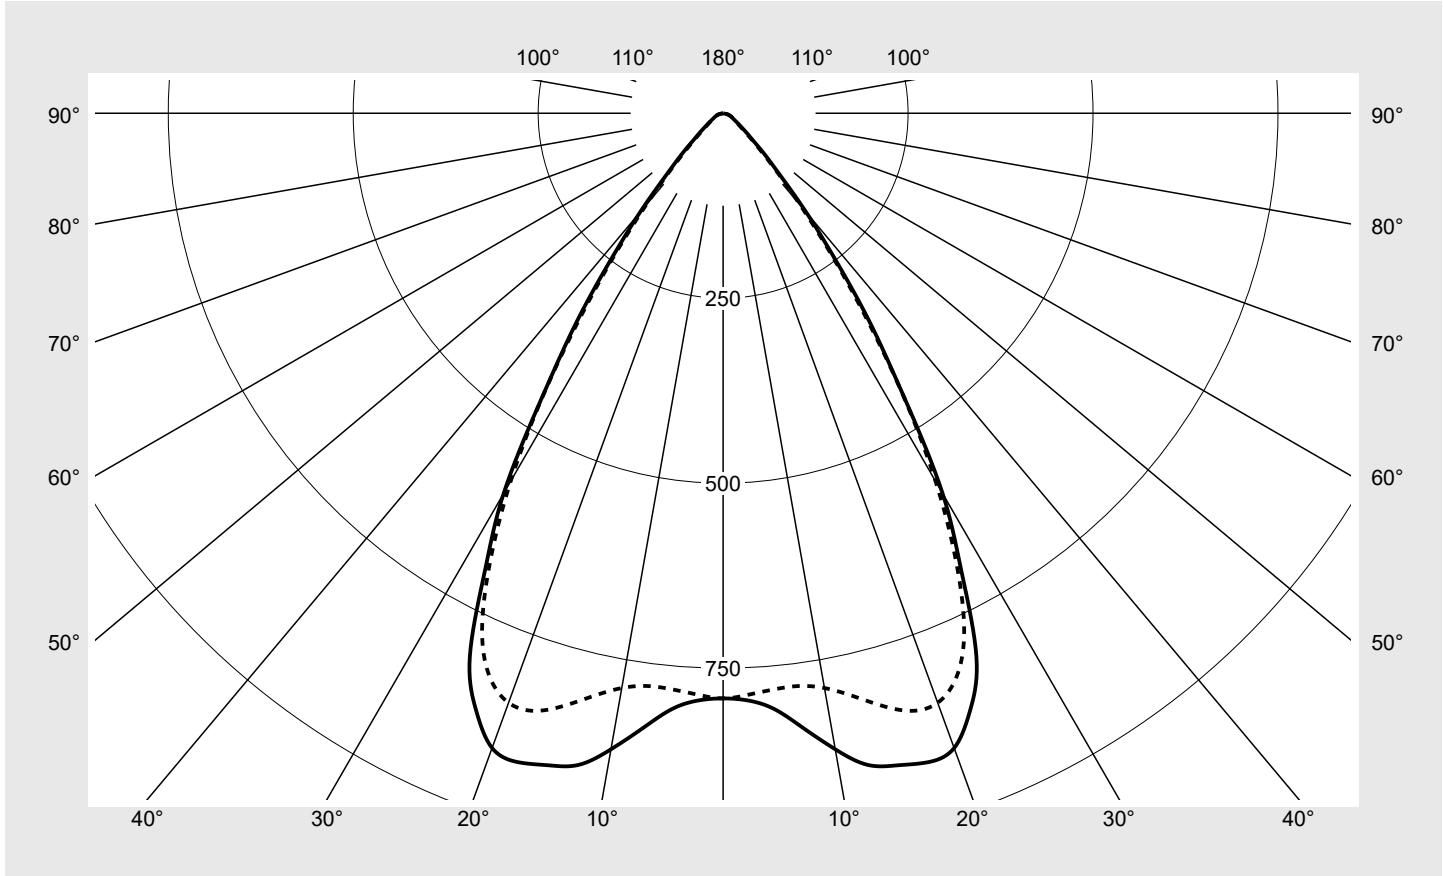

Classifications	
DIN 5040	A 7 0
CIE	N1=90 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
----------------------	--	-----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0,0° 180,0°	7,5°	15,0°	22,5°	30,0°	37,5°	45,0°
		172,5° 187,5° 352,5°	165,0° 195,0° 345,0°	157,5° 202,5° 337,5°	150,0° 210,0° 330,0°	142,5° 217,5° 322,5°	135,0° 225,0° 315,0°
γ	Luminous intensity in cd/klm						
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	791.0
2,5°	794.7	794.4	795.0	795.0	794.2	792.8	792.0
5,0°	809.1	811.4	809.6	807.9	804.8	800.8	797.1
7,5°	839.0	837.9	835.9	831.3	824.9	817.3	810.1
10,0°	873.0	873.9	866.7	857.6	846.5	834.6	825.0
12,5°	902.2	899.8	892.6	881.8	868.2	853.9	842.5
15,0°	912.4	911.0	905.2	895.6	883.1	869.5	858.7
17,5°	919.8	918.2	913.1	904.4	892.7	879.7	870.3
20,0°	913.1	910.4	906.8	900.7	891.6	880.0	870.9
22,5°	873.0	875.7	872.3	868.8	863.2	854.7	847.2
25,0°	810.1	803.4	805.6	804.0	800.6	794.9	789.9
27,5°	697.5	704.9	702.5	701.8	699.9	697.0	693.3
30,0°	593.2	587.4	585.8	584.9	582.5	580.2	578.9
32,5°	456.1	464.3	462.1	462.0	458.3	454.5	453.6
35,0°	347.7	343.4	342.9	343.5	340.5	335.4	333.2
37,5°	248.6	249.1	246.7	247.3	245.8	241.7	237.9
40,0°	174.7	169.8	171.0	172.0	172.0	169.5	166.1
42,5°	115.9	118.7	117.3	118.1	118.9	118.2	116.5
45,0°	82.2	79.8	80.4	81.1	81.3	81.6	80.9
47,5°	56.5	57.6	57.2	57.7	57.6	57.9	57.5
50,0°	42.4	41.3	41.7	42.1	42.1	42.1	42.0
52,5°	32.0	31.8	31.7	32.2	32.5	32.7	32.7
55,0°	25.6	24.9	25.0	25.6	26.1	26.6	26.9
57,5°	20.6	20.3	20.3	20.8	21.4	22.1	22.4
60,0°	17.2	16.8	16.6	17.2	18.2	18.6	18.9
62,5°	14.5	14.3	13.9	14.3	15.3	15.8	16.0
65,0°	13.1	12.5	12.0	12.2	13.0	13.5	13.7
67,5°	11.1	10.9	10.3	10.4	11.4	11.4	11.5
70,0°	9.4	9.0	8.7	8.7	9.6	9.3	9.5
72,5°	7.6	7.5	7.3	7.2	7.3	7.4	7.8
75,0°	5.9	5.7	5.6	5.7	5.6	5.7	6.1
77,5°	4.1	4.1	4.1	4.2	4.1	4.2	4.5
80,0°	2.6	2.5	2.5	2.7	2.7	2.8	2.9
82,5°	1.1	1.2	1.2	1.3	1.5	1.5	1.7
85,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.6
87,5°	0.2	0.3	0.3	0.3	0.3	0.3	0.3

Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
-----------------------------	--	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	52,5°	60,0°	67,5°	75,0°	82,5°	90,0°	Phi-zone	Total Phi-zone
	127,5°	120,0°	112,5°	105,0°	97,5°			
	232,5°	240,0°	247,5°	255,0°	262,5°			
	307,5°	300,0°	292,5°	285,0°	277,5°	270,0°		
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	1.2	1.2
2,5°	791.3	790.7	790.0	789.4	788.0	786.7	9.5	10.7
5,0°	794.2	790.9	788.1	786.0	783.2	781.9	19.1	29.7
7,5°	803.7	797.3	791.2	786.8	782.5	780.9	29.0	58.7
10,0°	816.7	808.7	801.4	796.1	791.2	788.9	39.5	98.2
12,5°	833.0	825.3	818.6	813.6	808.7	806.6	50.4	148.6
15,0°	850.7	844.9	836.9	832.9	831.6	829.0	61.4	210.0
17,5°	864.2	859.8	856.6	853.6	849.6	847.0	72.4	282.5
20,0°	864.8	860.1	856.9	853.9	850.4	848.0	82.3	364.7
22,5°	841.4	836.7	833.2	829.7	826.8	824.5	89.2	453.9
25,0°	786.0	782.5	779.1	775.6	772.9	771.0	91.6	545.4
27,5°	691.2	689.6	687.4	684.8	682.7	681.4	87.8	633.3
30,0°	578.6	579.1	578.3	576.4	575.3	574.3	79.6	712.9
32,5°	454.5	456.7	457.0	455.4	454.6	454.3	67.4	780.2
35,0°	335.0	337.7	338.0	336.6	336.0	336.2	53.3	833.5
37,5°	239.3	241.4	241.0	239.6	239.1	239.2	40.5	874.0
40,0°	166.2	166.4	164.7	163.3	162.9	163.0	29.6	903.6
42,5°	115.3	113.5	111.1	110.0	109.8	109.7	21.3	924.9
45,0°	79.0	76.9	75.1	74.3	74.0	73.9	15.2	940.1
47,5°	56.0	54.4	53.1	52.3	51.9	51.7	11.2	951.3
50,0°	40.9	39.8	38.8	38.0	37.5	37.4	8.5	959.8
52,5°	31.8	30.8	29.9	29.1	28.8	28.7	6.8	966.6
55,0°	25.9	25.0	24.2	23.4	23.2	23.3	5.6	972.3
57,5°	21.7	20.8	20.1	19.5	19.4	19.6	4.8	977.0
60,0°	18.6	18.0	17.1	16.6	16.8	17.1	4.2	981.2
62,5°	16.0	15.6	14.7	14.4	14.7	15.1	3.6	984.8
65,0°	14.0	13.6	12.8	12.7	13.1	13.5	3.2	988.1
67,5°	12.0	12.1	11.2	11.1	11.6	12.1	2.9	991.0
70,0°	9.8	10.4	9.7	9.7	10.2	10.6	2.5	993.4
72,5°	7.8	8.3	8.3	8.3	8.8	9.1	2.1	995.5
75,0°	6.2	6.3	6.8	6.9	7.3	7.6	1.6	997.1
77,5°	4.6	4.9	5.3	5.5	5.8	6.0	1.3	998.4
80,0°	3.1	3.4	3.7	4.0	4.2	4.4	0.9	999.2
82,5°	1.8	2.1	2.4	2.6	2.8	2.9	0.5	999.7
85,0°	0.7	1.0	1.2	1.3	1.6	1.6	0.2	1000.0
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.1	1000.0

Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
----------------------	--	-----------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.2	20.4	19.5	20.7	21.0	19.0	20.2	19.4	20.5	20.9
	3H	19.2	20.3	19.6	20.6	21.0	19.1	20.2	19.5	20.5	20.8
	4H	19.2	20.2	19.6	20.6	20.9	19.1	20.1	19.5	20.5	20.9
	6H	19.2	20.1	19.6	20.5	20.9	19.2	20.1	19.6	20.4	20.8
	8H	19.3	20.0	19.7	20.4	20.8	19.3	20.0	19.7	20.4	20.8
	12H	19.3	19.9	19.7	20.3	20.8	19.3	20.0	19.7	20.4	20.8
4H	2H	19.1	20.1	19.5	20.4	20.8	18.9	19.9	19.3	20.3	20.6
	3H	19.2	20.0	19.6	20.4	20.8	19.1	19.9	19.5	20.3	20.7
	4H	19.2	19.9	19.6	20.3	20.8	19.1	19.9	19.6	20.3	20.7
	6H	19.2	19.8	19.7	20.2	20.7	19.2	19.8	19.7	20.3	20.8
	8H	19.2	19.7	19.6	20.2	20.6	19.3	19.8	19.7	20.3	20.7
	12H	19.2	19.6	19.7	20.1	20.6	19.3	19.7	19.8	20.2	20.7
8H	4H	19.1	19.7	19.6	20.1	20.6	19.1	19.6	19.6	20.1	20.6
	6H	19.1	19.6	19.6	20.1	20.6	19.2	19.6	19.7	20.1	20.6
	8H	19.1	19.5	19.6	20.0	20.5	19.2	19.6	19.7	20.1	20.6
	12H	19.1	19.4	19.6	19.9	20.5	19.3	19.6	19.8	20.1	20.6
12H	4H	19.2	19.6	19.7	20.1	20.6	19.1	19.5	19.6	20.0	20.5
	6H	19.2	19.5	19.7	20.0	20.5	19.2	19.5	19.7	20.0	20.6
	8H	19.1	19.4	19.6	19.9	20.5	19.2	19.5	19.8	20.0	20.6

Luminance table		Max. for $\gamma \geq 65^\circ$									
		Photometric dimensions in mm: L = 852 B = 264									
C-planes	γ	10,0°	20,0°	30,0°	40,0°	50,0°	60,0°	70,0°	80,0°	90,0°	
		170,0°	160,0°	150,0°	140,0°	130,0°	120,0°	110,0°	100,0°	270,0°	
		190,0°	200,0°	210,0°	220,0°	230,0°	240,0°	250,0°	260,0°		
		180,0°	350,0°	340,0°	320,0°	310,0°	300,0°	290,0°	280,0°	270,0°	
Luminance in cd/m ²											
45,0°		19646.3	19038.2	19324.3	19431.7	19471.8	19038.7	18362.3	17859.9	17694.2	17645.5
50,0°		11145.0	10837.9	11040.8	11066.1	11064.6	10854.8	10465.0	10117.2	9896.3	9818.7
55,0°		7545.6	7324.8	7487.8	7679.0	7885.3	7734.2	7351.5	7044.4	6852.4	6875.8
60,0°		5805.2	5637.9	5732.8	6137.4	6330.3	6319.8	6088.0	5715.2	5648.7	5767.0
65,0°		5223.6	4919.9	4814.4	5210.8	5450.4	5605.9	5448.2	5082.3	5175.7	5407.1
70,0°		4662.5	4403.4	4260.5	4719.3	4616.0	4789.2	5124.3	4768.7	4957.8	5255.2
75,0°		3834.2	3701.4	3718.4	3680.8	3794.0	4010.0	4133.2	4501.0	4675.4	4960.9
80,0°		2500.4	2420.4	2575.2	2671.6	2716.1	2969.1	3305.9	3738.8	4018.2	4254.5
85,0°		977.0	952.4	968.3	973.1	1064.0	1341.2	1889.9	2353.4	2885.9	3146.0

Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
-----------------------------	--	------------------------------

Luminance values in cd/m²
γ 65°
γ 70°
γ 75°
γ 80°
γ 85°
siteco

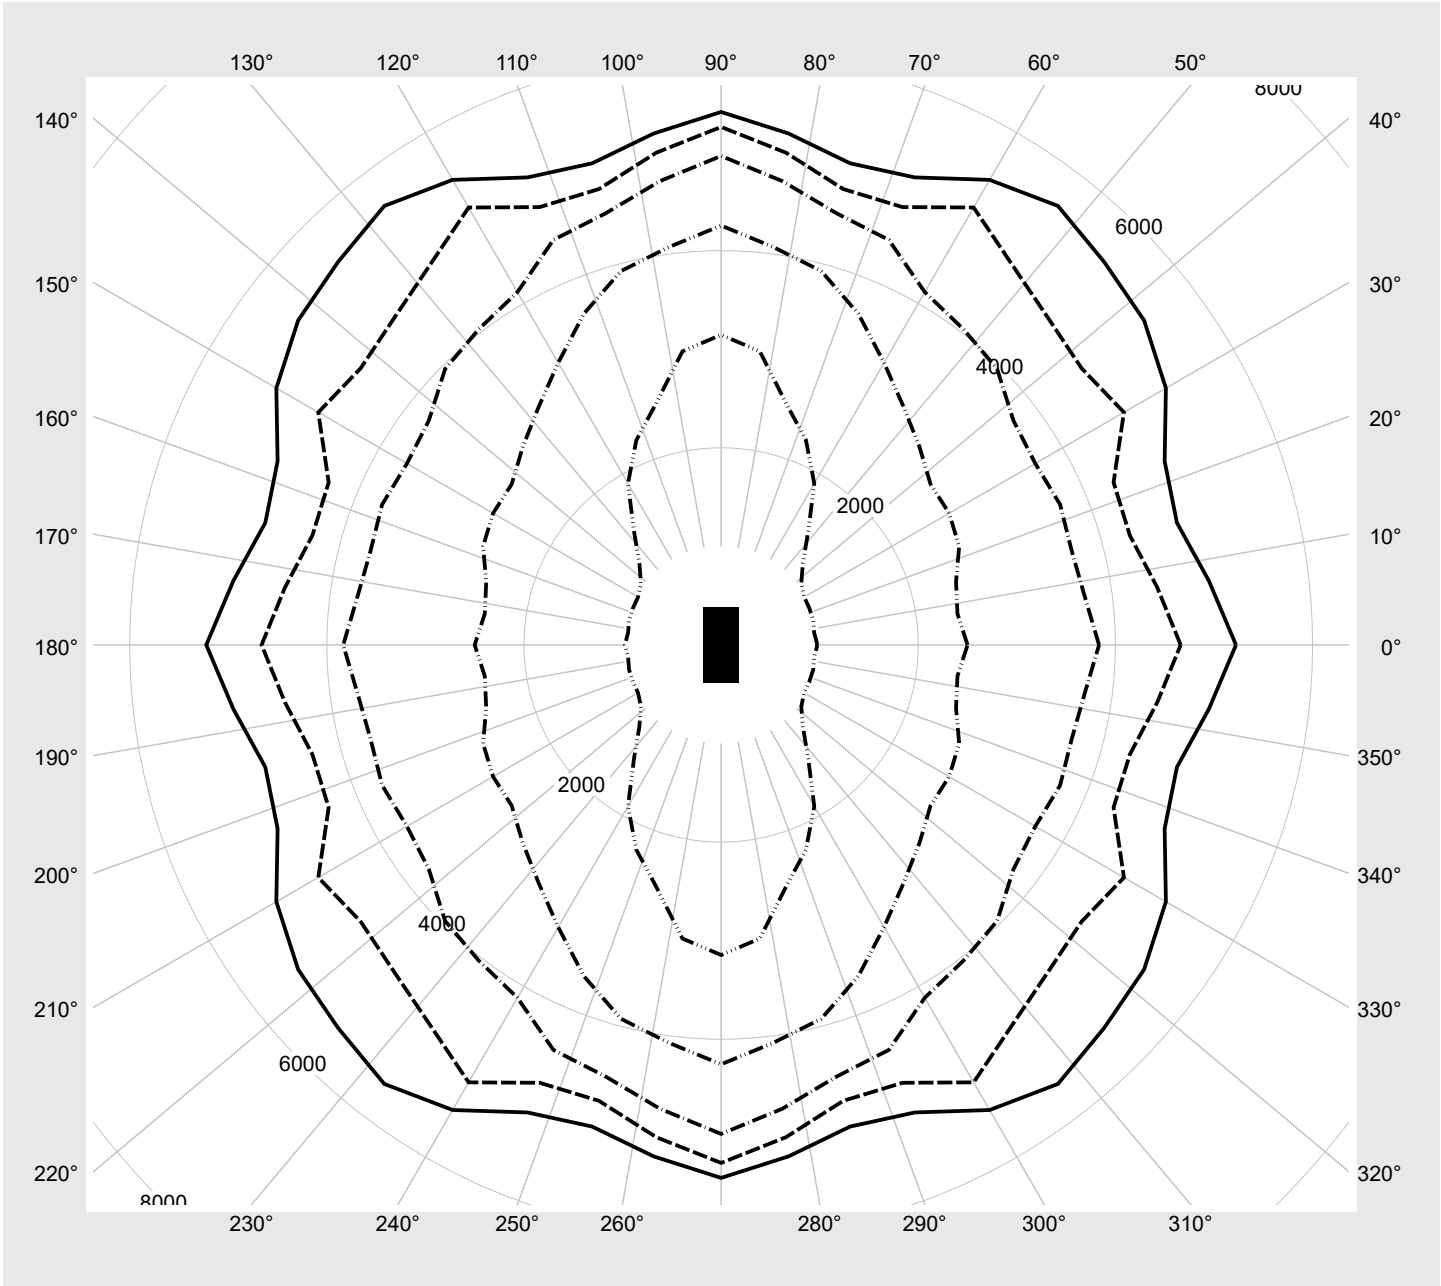

Photometric test report

Family Highbay 21	Order number: 52HN12DB4QDA EAN: 4069025256782	LP number 59723_22
----------------------	--	-----------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	38000	197.7
95	241	252	36142	187.3
90	228	250	34270	177.1
85	214	248	32244	166.1
80	201	245	30347	155.8
75	188	243	28447	145.8
70	175	240	26529	135.6
65	163	238	24754	126.2
60	150	235	22825	116.2
55	137	231	20886	106.1
50	124	228	18947	96.3
45	112	224	17141	87.1
40	99	219	15170	77.2
35	87	215	13346	68.0
30	74	209	11364	58.3
25	62	202	9525	49.1
20	50	194	7676	40.2
15	37	183	5668	30.6
10	25	169	3806	21.8
5	13	145	1934	12.5
1	4	102	528	5.4