




Photometric test report

Family Highbay 21	Order number: 52HN32DB4QDA EAN: 4069025438836	LP number 59723_60
	Version primary light control with lens, PMMA, housing, black, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting DC mode (central or group accumulator) initial emergency light level Rated values Net luminous flux = 5840 lm Power consumption = 31.4 W Luminous efficacy = 186 lm/W	serial documentation 24.02.2025
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 920 cd/klm**

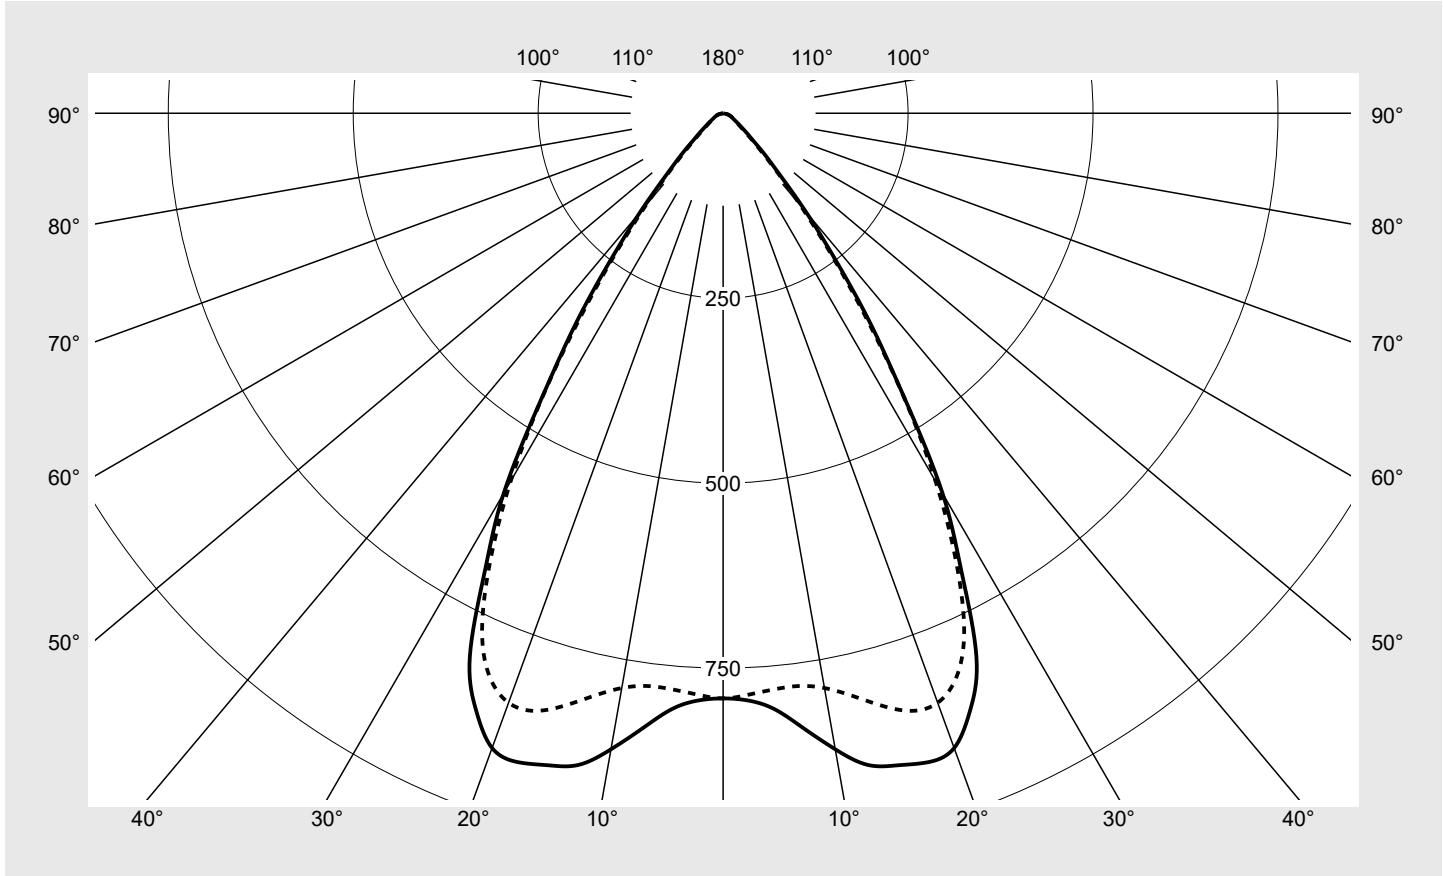

Classifications	
DIN 5040	A 7 0
CIE	N1=90 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 21	Order number: 52HN32DB4QDA EAN: 4069025438836	LP number 59723_60
----------------------	--	-----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0,0° 180,0°	7,5°	15,0°	22,5°	30,0°	37,5°	45,0°
		172,5° 187,5° 352,5°	165,0° 195,0° 345,0°	157,5° 202,5° 337,5°	150,0° 210,0° 330,0°	142,5° 217,5° 322,5°	135,0° 225,0° 315,0°
γ	Luminous intensity in cd/klm						
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	791.0
2,5°	794.7	794.4	795.0	795.0	794.2	792.8	792.0
5,0°	809.1	811.4	809.6	807.9	804.8	800.8	797.1
7,5°	839.0	837.9	835.9	831.3	824.9	817.3	810.1
10,0°	873.0	873.9	866.7	857.6	846.5	834.6	825.0
12,5°	902.2	899.8	892.6	881.8	868.2	853.9	842.5
15,0°	912.4	911.0	905.2	895.6	883.1	869.5	858.7
17,5°	919.8	918.2	913.1	904.4	892.7	879.7	870.3
20,0°	913.1	910.4	906.8	900.7	891.6	880.0	870.9
22,5°	873.0	875.7	872.3	868.8	863.2	854.7	847.2
25,0°	810.1	803.4	805.6	804.0	800.6	794.9	789.9
27,5°	697.5	704.9	702.5	701.8	699.9	697.0	693.3
30,0°	593.2	587.4	585.8	584.9	582.5	580.2	578.9
32,5°	456.1	464.3	462.1	462.0	458.3	454.5	453.6
35,0°	347.7	343.4	342.9	343.5	340.5	335.4	333.2
37,5°	248.6	249.1	246.7	247.3	245.8	241.7	237.9
40,0°	174.7	169.8	171.0	172.0	172.0	169.5	166.1
42,5°	115.9	118.7	117.3	118.1	118.9	118.2	116.5
45,0°	82.2	79.8	80.4	81.1	81.3	81.6	80.9
47,5°	56.5	57.6	57.2	57.7	57.6	57.9	57.5
50,0°	42.4	41.3	41.7	42.1	42.1	42.1	42.0
52,5°	32.0	31.8	31.7	32.2	32.5	32.7	32.7
55,0°	25.6	24.9	25.0	25.6	26.1	26.6	26.9
57,5°	20.6	20.3	20.3	20.8	21.4	22.1	22.4
60,0°	17.2	16.8	16.6	17.2	18.2	18.6	18.9
62,5°	14.5	14.3	13.9	14.3	15.3	15.8	16.0
65,0°	13.1	12.5	12.0	12.2	13.0	13.5	13.7
67,5°	11.1	10.9	10.3	10.4	11.4	11.4	11.5
70,0°	9.4	9.0	8.7	8.7	9.6	9.3	9.5
72,5°	7.6	7.5	7.3	7.2	7.3	7.4	7.8
75,0°	5.9	5.7	5.6	5.7	5.6	5.7	6.1
77,5°	4.1	4.1	4.1	4.2	4.1	4.2	4.5
80,0°	2.6	2.5	2.5	2.7	2.7	2.8	2.9
82,5°	1.1	1.2	1.2	1.3	1.5	1.5	1.7
85,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.6
87,5°	0.2	0.3	0.3	0.3	0.3	0.3	0.3

Photometric test report

Family Highbay 21	Order number: 52HN32DB4QDA EAN: 4069025438836	LP number 59723_60
-----------------------------	--	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	52,5°	60,0°	67,5°	75,0°	82,5°	90,0°	Phi-zone	Total Phi-zone
	127,5°	120,0°	112,5°	105,0°	97,5°			
	232,5°	240,0°	247,5°	255,0°	262,5°			
	307,5°	300,0°	292,5°	285,0°	277,5°	270,0°		
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	1.2	1.2
2,5°	791.3	790.7	790.0	789.4	788.0	786.7	9.5	10.7
5,0°	794.2	790.9	788.1	786.0	783.2	781.9	19.1	29.7
7,5°	803.7	797.3	791.2	786.8	782.5	780.9	29.0	58.7
10,0°	816.7	808.7	801.4	796.1	791.2	788.9	39.5	98.2
12,5°	833.0	825.3	818.6	813.6	808.7	806.6	50.4	148.6
15,0°	850.7	844.9	836.9	832.9	831.6	829.0	61.4	210.0
17,5°	864.2	859.8	856.6	853.6	849.6	847.0	72.4	282.5
20,0°	864.8	860.1	856.9	853.9	850.4	848.0	82.3	364.7
22,5°	841.4	836.7	833.2	829.7	826.8	824.5	89.2	453.9
25,0°	786.0	782.5	779.1	775.6	772.9	771.0	91.6	545.4
27,5°	691.2	689.6	687.4	684.8	682.7	681.4	87.8	633.3
30,0°	578.6	579.1	578.3	576.4	575.3	574.3	79.6	712.9
32,5°	454.5	456.7	457.0	455.4	454.6	454.3	67.4	780.2
35,0°	335.0	337.7	338.0	336.6	336.0	336.2	53.3	833.5
37,5°	239.3	241.4	241.0	239.6	239.1	239.2	40.5	874.0
40,0°	166.2	166.4	164.7	163.3	162.9	163.0	29.6	903.6
42,5°	115.3	113.5	111.1	110.0	109.8	109.7	21.3	924.9
45,0°	79.0	76.9	75.1	74.3	74.0	73.9	15.2	940.1
47,5°	56.0	54.4	53.1	52.3	51.9	51.7	11.2	951.3
50,0°	40.9	39.8	38.8	38.0	37.5	37.4	8.5	959.8
52,5°	31.8	30.8	29.9	29.1	28.8	28.7	6.8	966.6
55,0°	25.9	25.0	24.2	23.4	23.2	23.3	5.6	972.3
57,5°	21.7	20.8	20.1	19.5	19.4	19.6	4.8	977.0
60,0°	18.6	18.0	17.1	16.6	16.8	17.1	4.2	981.2
62,5°	16.0	15.6	14.7	14.4	14.7	15.1	3.6	984.8
65,0°	14.0	13.6	12.8	12.7	13.1	13.5	3.2	988.1
67,5°	12.0	12.1	11.2	11.1	11.6	12.1	2.9	991.0
70,0°	9.8	10.4	9.7	9.7	10.2	10.6	2.5	993.4
72,5°	7.8	8.3	8.3	8.3	8.8	9.1	2.1	995.5
75,0°	6.2	6.3	6.8	6.9	7.3	7.6	1.6	997.1
77,5°	4.6	4.9	5.3	5.5	5.8	6.0	1.3	998.4
80,0°	3.1	3.4	3.7	4.0	4.2	4.4	0.9	999.2
82,5°	1.8	2.1	2.4	2.6	2.8	2.9	0.5	999.7
85,0°	0.7	1.0	1.2	1.3	1.6	1.6	0.2	1000.0
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.1	1000.0

Photometric test report

Family Highbay 21	Order number: 52HN32DB4QDA EAN: 4069025438836	LP number 59723_60
----------------------	--	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	12.7	13.9	13.0	14.2	14.5	12.5	13.7	12.8	14.0	14.4
	3H	12.7	13.8	13.1	14.1	14.5	12.6	13.6	12.9	14.0	14.3
	4H	12.7	13.7	13.1	14.1	14.4	12.6	13.6	13.0	14.0	14.3
	6H	12.7	13.6	13.1	14.0	14.4	12.7	13.6	13.1	13.9	14.3
	8H	12.8	13.5	13.2	13.9	14.3	12.8	13.5	13.2	13.9	14.3
	12H	12.8	13.4	13.2	13.8	14.2	12.8	13.5	13.2	13.8	14.3
4H	2H	12.6	13.6	13.0	13.9	14.3	12.4	13.4	12.8	13.8	14.1
	3H	12.7	13.5	13.1	13.9	14.3	12.5	13.4	13.0	13.8	14.2
	4H	12.7	13.4	13.1	13.8	14.3	12.6	13.4	13.1	13.8	14.2
	6H	12.7	13.3	13.1	13.7	14.2	12.7	13.3	13.2	13.8	14.2
	8H	12.7	13.2	13.1	13.7	14.1	12.7	13.3	13.2	13.8	14.2
	12H	12.7	13.1	13.2	13.6	14.1	12.8	13.2	13.3	13.7	14.2
8H	4H	12.6	13.2	13.1	13.6	14.1	12.6	13.1	13.1	13.6	14.1
	6H	12.6	13.1	13.1	13.6	14.1	12.7	13.1	13.2	13.6	14.1
	8H	12.6	13.0	13.1	13.5	14.0	12.7	13.1	13.2	13.6	14.1
	12H	12.6	12.9	13.1	13.4	13.9	12.8	13.1	13.3	13.6	14.1
12H	4H	12.7	13.1	13.2	13.6	14.1	12.6	13.0	13.1	13.5	14.0
	6H	12.7	13.0	13.2	13.5	14.0	12.7	13.0	13.2	13.5	14.1
	8H	12.6	12.9	13.1	13.4	14.0	12.7	13.0	13.3	13.5	14.1

siteco

Luminance table		Max. for $\gamma \geq 65^\circ$									
		Photometric dimensions in mm: L = 852 B = 264									
C-planes	γ	10,0°	20,0°	30,0°	40,0°	50,0°	60,0°	70,0°	80,0°	90,0°	
		170,0°	160,0°	150,0°	140,0°	130,0°	120,0°	110,0°	100,0°	90,0°	
		190,0°	200,0°	210,0°	220,0°	230,0°	240,0°	250,0°	260,0°	270,0°	
		180,0°	350,0°	340,0°	330,0°	320,0°	310,0°	300,0°	290,0°	280,0°	
	45,0°	3019.3	2925.9	2969.8	2986.3	2992.5	2925.9	2822.0	2744.8	2719.3	2711.8
	50,0°	1712.8	1665.6	1696.8	1700.7	1700.5	1668.2	1608.3	1554.9	1520.9	1509.0
	55,0°	1159.6	1125.7	1150.8	1180.1	1211.8	1188.6	1129.8	1082.6	1053.1	1056.7
	60,0°	892.2	866.4	881.0	943.2	972.9	971.3	935.6	878.3	868.1	886.3
	65,0°	802.8	756.1	739.9	800.8	837.6	861.5	837.3	781.1	795.4	831.0
	70,0°	716.5	676.7	654.8	725.3	709.4	736.0	787.5	732.9	761.9	807.6
	75,0°	589.3	568.8	571.5	565.7	583.1	616.3	635.2	691.7	718.5	762.4
	80,0°	384.3	372.0	395.8	410.6	417.4	456.3	508.1	574.6	617.5	653.9
	85,0°	150.1	146.4	148.8	149.5	163.5	206.1	290.5	361.7	443.5	483.5

Photometric test report

Family Highbay 21	Order number: 52HN32DB4QDA EAN: 4069025438836	LP number 59723_60
-----------------------------	--	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

