



# Photometric test report

<b>Family</b> Highbay 11	<b>Order number</b> 51HN11DB4RLA	<b>LP number</b> 59711_340
	<b>Version</b>	primary light control with lens, PMMA, housing, white, for Licross® rail, narrow distribution
	<b>Lamps</b>	LED 4000 K   CRI ≥ 80
	<b>Controlgear</b>	ECG-DALI
	<b>Rated values</b>	Net luminous flux = 42500 lm Power consumption = 213.7 W Luminous efficacy = 198.9 lm/W
		<b>serial documentation</b> 17.03.2025
		

**Luminous intensity in cd/klm** C180-0 C270-90 Imax: 2679 cd/klm



Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=97 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Highbay 11	<b>Order number</b> 51HN11DB4RLA	<b>LP number</b> 59711_340
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Highbay 11	<b>Order number</b> 51HN11DB4RLA	<b>LP number</b> 59711_340
-----------------------------	-------------------------------------	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.1	21.3	20.5	21.6	21.9	18.9	20.1	19.3	20.4	20.7
	3H	20.3	21.4	20.7	21.7	22.1	19.2	20.2	19.6	20.6	20.9
	4H	20.4	21.4	20.8	21.7	22.1	19.3	20.3	19.7	20.6	21.0
	6H	20.5	21.3	20.9	21.7	22.1	19.5	20.3	19.9	20.7	21.1
	8H	20.5	21.2	21.0	21.6	22.0	19.6	20.3	20.0	20.7	21.1
	12H	20.5	21.1	20.9	21.5	22.0	19.6	20.3	20.0	20.7	21.1
4H	2H	20.2	21.1	20.6	21.5	21.8	19.1	20.0	19.5	20.4	20.8
	3H	20.5	21.3	20.9	21.7	22.1	19.5	20.3	19.9	20.7	21.1
	4H	20.6	21.3	21.0	21.7	22.1	19.7	20.4	20.1	20.8	21.2
	6H	20.7	21.3	21.1	21.7	22.2	19.9	20.5	20.4	20.9	21.4
	8H	20.7	21.2	21.1	21.6	22.1	20.0	20.5	20.5	20.9	21.4
	12H	20.7	21.1	21.1	21.5	22.0	20.0	20.5	20.5	20.9	21.4
8H	4H	20.6	21.1	21.1	21.6	22.0	19.7	20.2	20.2	20.7	21.2
	6H	20.7	21.1	21.2	21.6	22.1	20.0	20.4	20.5	20.9	21.4
	8H	20.6	21.0	21.2	21.5	22.0	20.1	20.4	20.6	20.9	21.4
	12H	20.6	20.9	21.1	21.4	22.0	20.1	20.4	20.7	20.9	21.5
12H	4H	20.6	21.0	21.1	21.5	22.0	19.7	20.1	20.2	20.6	21.1
	6H	20.6	21.0	21.2	21.5	22.0	19.9	20.3	20.5	20.8	21.3
	8H	20.6	20.9	21.2	21.4	22.0	20.0	20.3	20.6	20.8	21.4


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 852</b>
			<b>B = 264</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45,0°		33665.9	32541.9	31076.0	29132.3	27256.4	25473.3	24903.1	
50,0°		25238.2	24359.6	23327.8	21942.7	20297.5	18712.5	18182.8	
55,0°		18313.0	17817.2	17199.8	16306.4	15050.4	13737.6	13185.5	
60,0°		12564.8	12578.4	12812.3	12240.9	11513.1	10387.3	9868.8	
65,0°		9646.9	9484.2	9699.2	9542.3	9340.7	8394.2	7934.5	
70,0°		7474.1	7384.1	7932.6	7491.2	7774.1	7157.0	6839.9	
75,0°		6552.1	6149.2	6163.0	6079.8	6272.5	6540.5	6528.8	
80,0°		4780.1	4602.7	4452.6	4533.1	5065.2	6151.1	6276.3	
85,0°		1769.0	1747.4	1827.6	2066.1	3171.7	4669.8	5292.0	

# Photometric test report

<b>Family</b> Highbay 11	<b>Order number</b> 51HN11DB4RLA	<b>LP number</b> 59711_340
-----------------------------	-------------------------------------	-------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

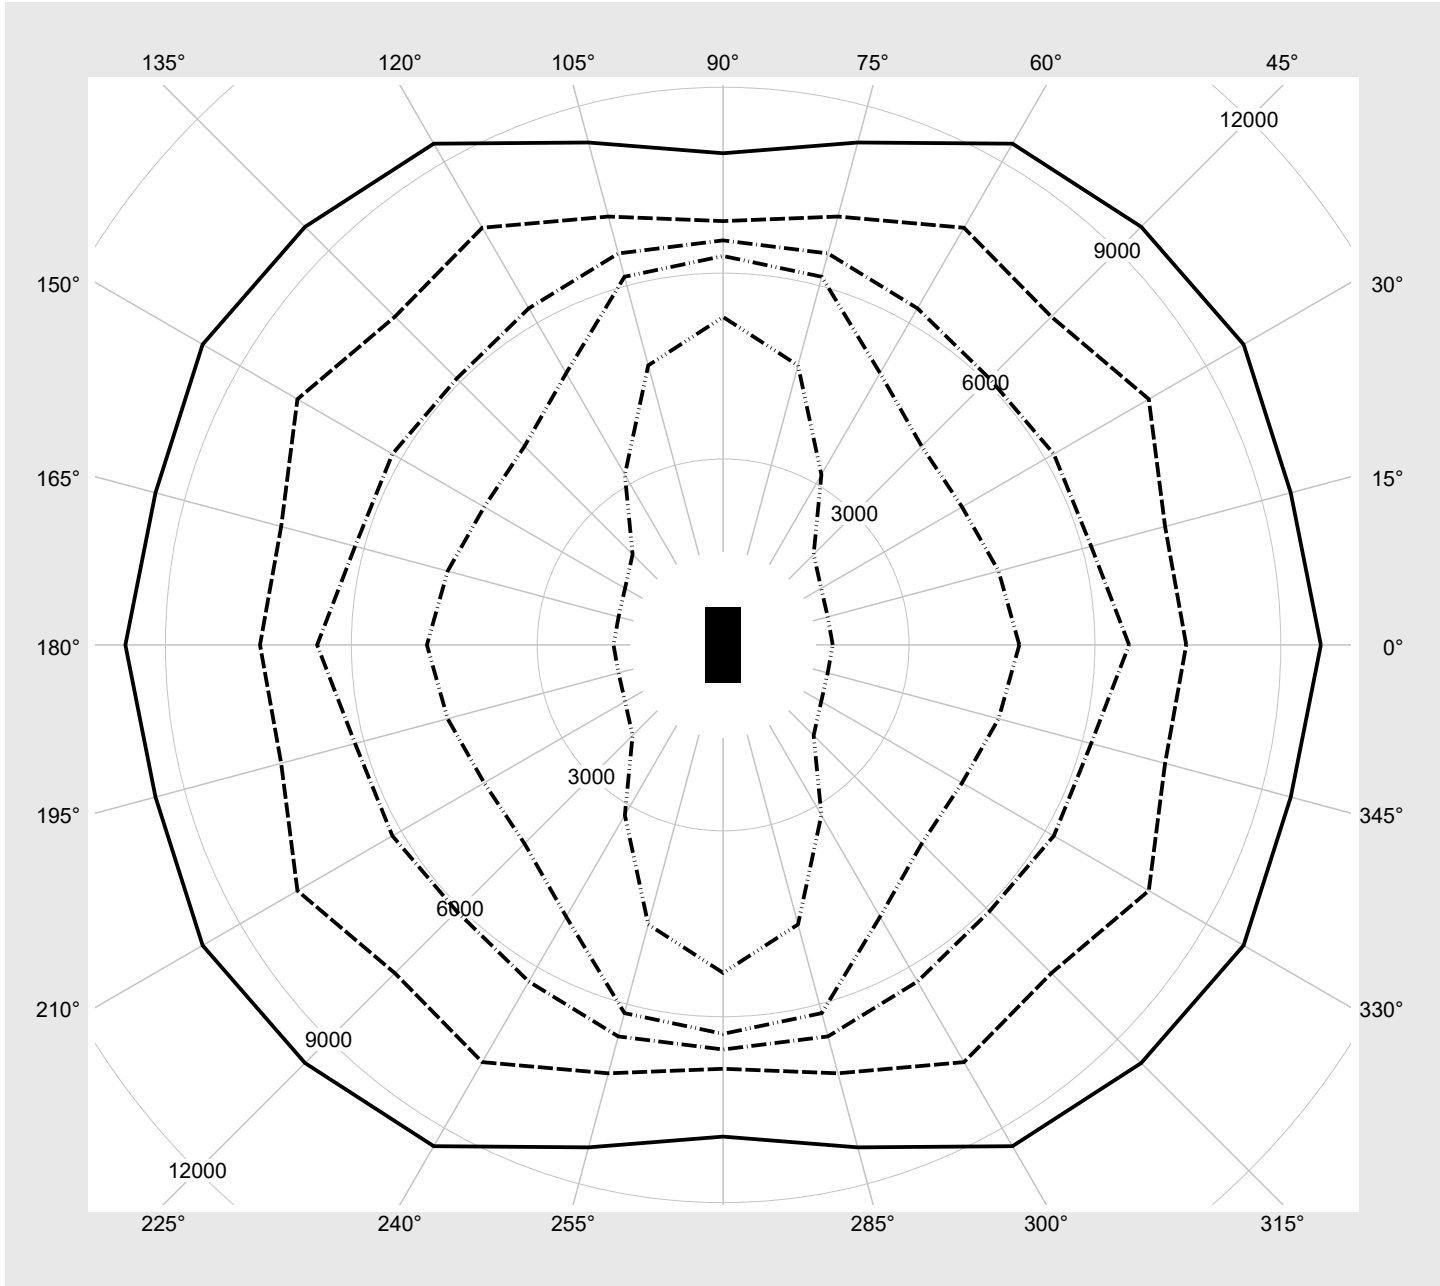

## Photometric test report

<b>Family</b> Highbay 11	<b>Order number</b> 51HN11DB4RLA	<b>LP number</b> 59711_340
-----------------------------	-------------------------------------	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	42500	213.7
95	240	252	40311	201.5
90	227	250	38258	190.0
85	214	248	36193	178.8
80	200	245	33955	166.7
75	187	243	31858	155.5
70	174	240	29749	144.4
65	161	237	27625	133.3
60	148	234	25488	122.5
55	135	231	23337	111.6
50	122	227	21171	100.8
45	110	223	19157	90.8
40	97	219	16954	80.1
35	85	214	14901	70.3
30	73	208	12834	60.7
25	60	201	10579	50.1
20	48	193	8469	40.5
15	36	182	6345	31.1
10	24	168	4202	21.7
5	12	142	2034	12.0
1	4	102	581	5.4