

Photometric test report

Family Streetlight 31 maxi



Order number: 5XH414AA08SA
EAN: 4069025512024

LP number
59800_3288

Version post-top or side-entry mounting
Optic asymmetric distribution (PL32)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO
Rated values Net luminous flux = 29470 lm
Power consumption = 208.6 W
Luminous efficacy = 141.3 lm/W

serial
documentation
22.08.2025

siteco

Luminous intensity in cd/klm


C180-0

C245-65

C250-70

C270-90

Imax: 1590 cd/klm

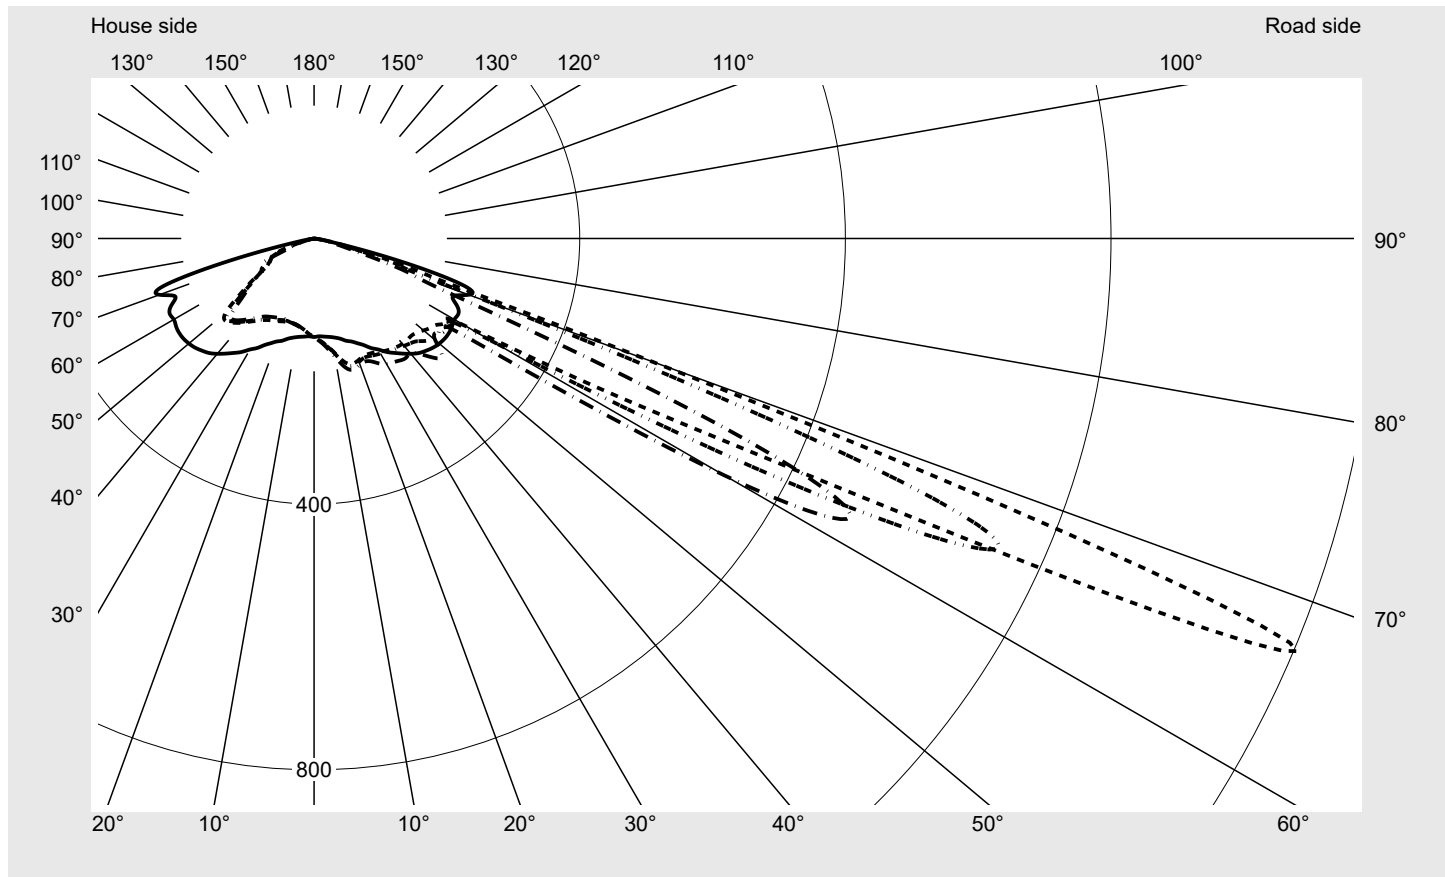

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	732.5
Imax 80°	42.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 maxi	Order number: 5XH414AA08SA EAN: 4069025512024	LP number 59800_3288
Envelope curve in cd/klm KMK 67.5° KMK 65° KMK 62.5° KMK 60°		siteco

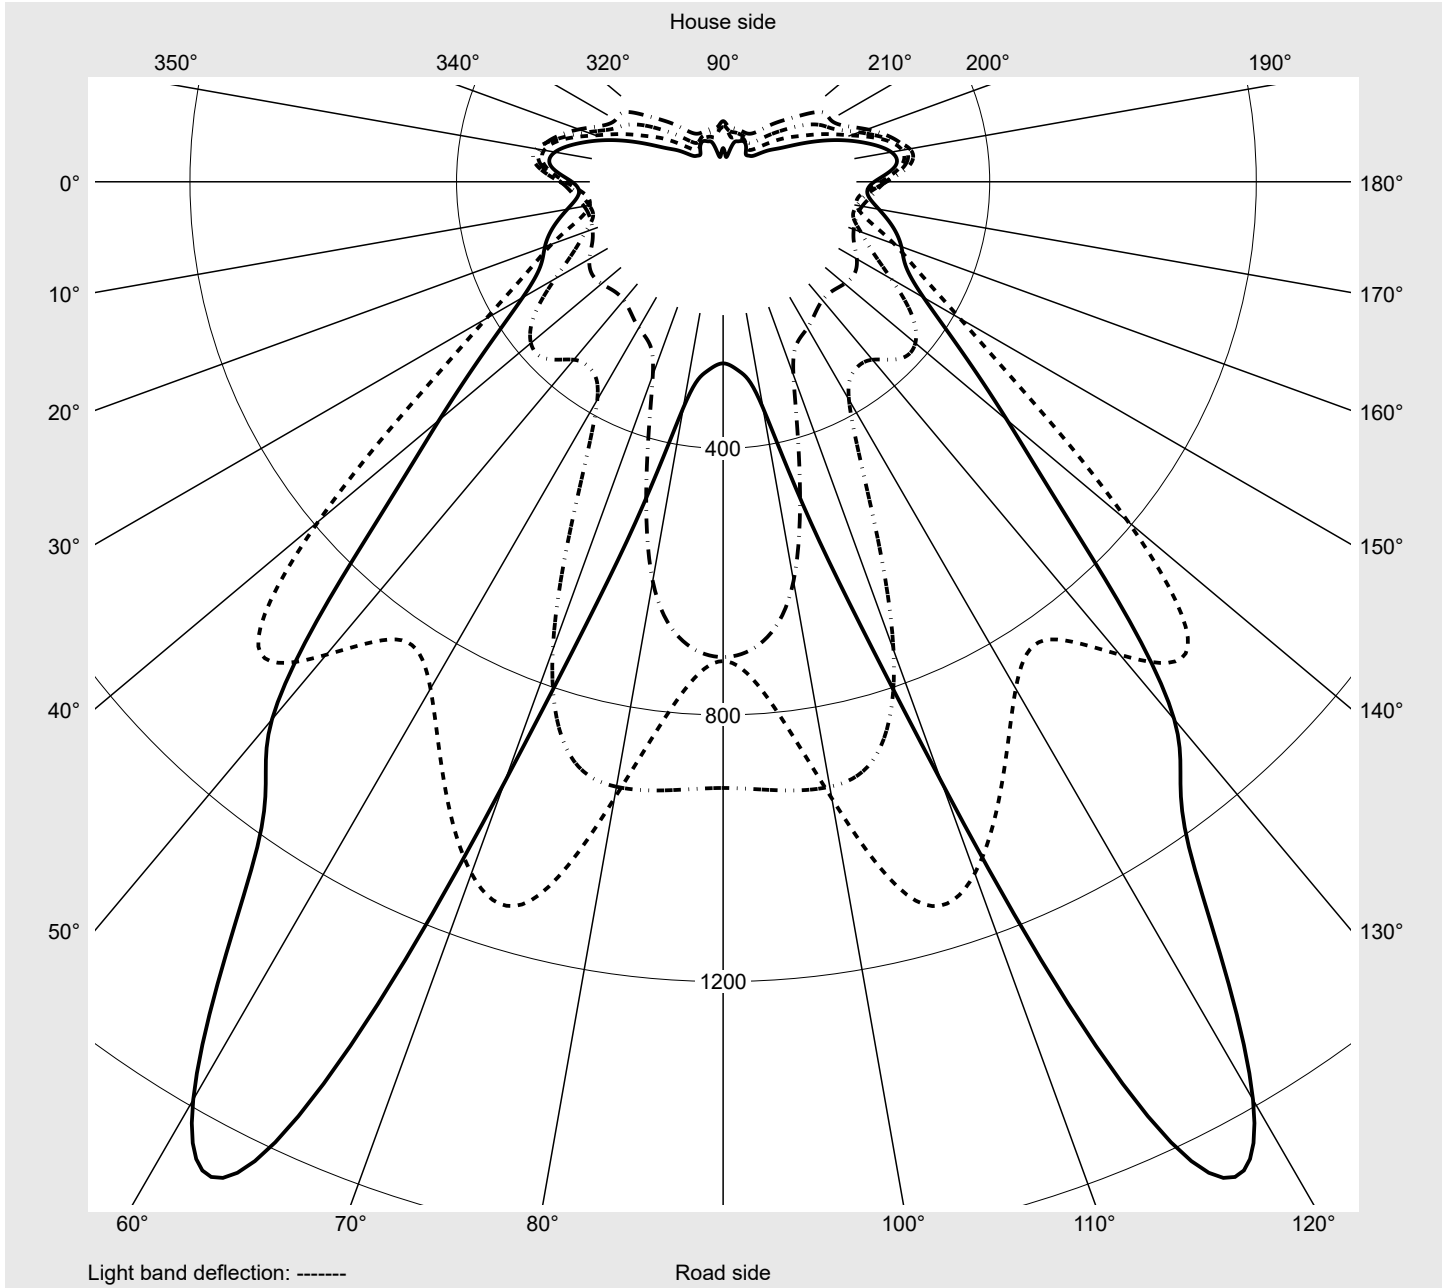

Photometric test report

Family Streetlight 31 maxi	Order number: 5XH414AA08SA EAN: 4069025512024	LP number 59800_3288
-------------------------------	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	147.5	147.7	148.2	148.8	149.3	149.7	150.1	150.5	151.0	151.2	151.6	152.0	152.3
5,0°	148.1	148.8	149.6	150.5	151.5	152.4	153.2	153.9	154.7	155.3	155.9	156.5	157.1
7,5°	149.3	150.3	151.6	152.8	154.2	155.5	156.6	157.8	159.2	160.4	161.7	162.9	164.0
10,0°	150.8	152.3	153.6	155.1	156.9	158.6	160.3	162.3	164.5	166.7	168.7	170.7	172.7
12,5°	153.2	154.9	156.6	158.7	161.0	163.3	165.3	167.1	169.4	172.2	175.8	179.6	183.1
15,0°	156.6	158.5	160.8	163.5	166.3	169.0	171.4	173.6	175.7	177.6	180.4	185.5	191.1
17,5°	161.5	163.7	165.7	168.4	171.4	174.3	177.0	179.5	181.8	183.8	185.5	187.5	192.4
20,0°	165.1	168.5	171.0	174.1	176.3	178.8	181.5	183.8	186.0	187.6	188.7	189.3	190.8
22,5°	170.7	173.7	176.7	179.6	182.3	183.8	185.7	187.4	188.8	189.6	190.1	190.2	190.2
25,0°	177.2	180.3	182.5	185.8	188.3	189.3	190.1	191.0	191.1	191.4	191.6	192.0	191.8
27,5°	185.9	187.9	189.7	191.7	194.6	195.2	194.7	194.3	194.0	193.7	193.9	193.9	193.7
30,0°	193.0	195.9	197.3	198.4	199.8	200.4	199.0	197.8	197.0	196.3	196.3	195.7	195.6
32,5°	202.5	203.8	204.8	205.0	204.9	205.6	203.7	201.6	199.4	198.4	198.6	198.6	199.0
35,0°	210.3	211.7	211.9	210.9	210.1	210.0	208.0	204.8	201.9	200.3	200.6	200.9	201.8
37,5°	218.4	218.5	218.4	216.2	214.8	213.6	210.9	207.5	204.3	202.5	202.1	202.7	204.0
40,0°	226.6	225.1	223.4	220.3	218.2	215.7	213.8	210.8	207.0	204.7	204.0	204.1	205.2
42,5°	233.9	229.3	226.2	222.7	220.0	216.1	214.2	213.0	209.1	206.7	205.1	204.2	205.2
45,0°	238.8	233.5	229.0	224.6	221.7	216.2	212.8	211.8	211.0	208.6	204.5	203.3	204.4
47,5°	243.2	236.1	230.3	225.1	221.5	216.3	212.1	210.9	212.5	209.4	204.2	202.8	204.8
50,0°	246.0	237.2	229.9	225.1	220.2	215.7	212.4	211.6	213.0	212.0	205.2	203.7	207.3
52,5°	247.8	236.6	228.3	223.7	218.6	215.2	213.5	211.8	210.7	212.9	207.8	206.9	211.4
55,0°	247.9	234.2	225.4	219.4	216.5	215.7	216.1	213.7	212.2	214.1	211.4	211.0	218.0
57,5°	246.4	228.9	221.1	214.7	212.3	214.4	219.6	220.1	220.0	219.1	218.0	220.4	228.4
60,0°	243.9	225.0	211.8	206.9	208.6	216.7	231.6	240.5	237.9	231.7	231.9	240.8	253.2
62,5°	245.1	216.4	204.0	202.1	219.7	247.1	291.2	344.6	376.5	375.3	348.5	344.6	377.6
65,0°	236.7	208.7	203.4	226.2	273.6	326.7	410.6	554.3	792.9	986.2	926.4	839.9	878.2
67,5°	226.9	217.7	237.4	264.1	284.6	303.0	347.4	430.5	556.2	758.6	1053.1	1218.6	1590.2
70,0°	247.8	237.5	209.5	169.9	135.0	120.2	130.6	174.7	263.5	365.7	478.5	659.1	732.5
72,5°	237.4	161.0	89.1	48.3	32.5	27.6	30.4	46.4	88.7	160.3	213.7	229.6	201.1
75,0°	143.2	55.4	21.7	14.2	13.6	13.8	14.9	18.8	28.2	61.4	101.5	106.9	95.1
77,5°	47.8	12.0	8.4	8.7	8.8	9.4	9.5	11.9	15.3	23.0	44.7	49.6	46.2
80,0°	13.7	5.3	5.2	5.5	5.6	5.7	6.0	6.7	8.9	11.1	18.7	22.1	20.1
82,5°	3.8	2.8	2.8	2.9	3.1	3.2	3.2	3.4	4.4	5.6	6.8	8.0	8.3
85,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.4	1.5	1.8	1.8	2.0	2.1
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi		Order number: 5XH414AA08SA EAN: 4069025512024										LP number 59800_3288	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	152.7	153.0	153.2	153.2	153.4	153.5	147.3	146.7	146.6	146.4	146.0	145.8	145.7
5,0°	157.7	158.3	158.9	159.4	159.7	159.8	147.5	146.6	145.9	145.4	144.6	143.9	143.4
7,5°	164.8	165.6	166.6	167.6	168.5	168.9	148.1	146.7	145.7	144.6	143.5	142.5	141.5
10,0°	174.1	175.2	176.1	177.8	179.7	180.5	149.0	147.3	145.9	144.4	143.0	141.7	140.4
12,5°	186.1	188.0	188.5	190.1	192.9	194.3	150.8	148.8	147.0	145.2	143.5	141.9	140.2
15,0°	194.9	198.0	198.7	199.3	202.4	204.2	154.3	152.0	150.0	147.7	145.6	143.7	141.8
17,5°	197.2	200.0	201.4	200.6	203.1	205.6	158.6	155.9	153.1	150.5	148.2	146.3	144.5
20,0°	195.1	197.8	199.4	199.1	199.8	202.0	161.7	159.2	156.4	153.9	151.3	148.9	146.6
22,5°	192.1	194.9	196.8	197.2	198.2	200.5	166.8	164.9	162.7	159.7	156.7	153.4	150.1
25,0°	192.1	195.5	198.7	199.8	200.6	204.2	174.1	171.6	170.1	166.6	162.7	158.2	153.9
27,5°	193.7	197.8	203.2	205.9	206.1	212.2	182.4	180.0	177.2	174.5	169.6	164.3	158.6
30,0°	196.7	200.2	207.1	210.2	209.8	218.5	190.8	188.8	185.8	181.5	177.2	170.1	163.2
32,5°	200.4	202.9	207.4	209.5	209.7	221.2	199.9	198.2	195.3	190.2	183.6	177.8	169.1
35,0°	202.9	205.8	207.0	209.1	210.0	224.4	209.9	208.8	206.0	200.2	191.7	183.5	177.5
37,5°	205.5	207.9	208.8	209.9	211.5	226.8	219.1	219.1	216.5	210.2	201.5	192.0	184.1
40,0°	207.0	211.0	212.6	213.1	218.3	225.8	228.5	229.5	227.3	220.6	211.3	201.3	193.2
42,5°	207.4	214.2	217.3	222.1	232.8	235.9	237.6	239.8	238.5	230.8	220.7	210.2	201.3
45,0°	207.1	218.9	229.5	232.8	249.5	253.7	244.8	249.2	248.9	240.5	228.6	216.9	207.7
47,5°	209.7	228.2	240.7	241.1	256.8	261.3	251.4	257.6	256.9	247.5	234.2	221.7	212.8
50,0°	215.2	234.1	242.8	237.7	238.9	238.1	257.2	265.4	263.4	251.7	236.4	223.8	214.8
52,5°	220.9	235.8	236.6	229.8	233.4	232.8	261.7	271.8	267.6	251.8	235.1	223.1	213.7
55,0°	226.4	234.2	231.6	229.7	237.8	239.0	266.0	276.0	268.4	248.8	227.1	214.3	207.5
57,5°	233.5	241.3	246.5	256.4	286.3	304.6	270.1	278.4	265.8	240.1	211.7	198.4	196.3
60,0°	265.0	308.4	442.0	608.3	691.7	713.1	273.1	279.1	259.9	230.0	199.5	186.2	181.8
62,5°	512.4	747.5	889.7	921.7	916.4	909.5	280.5	284.4	253.3	217.1	186.3	169.9	148.4
65,0°	991.5	1104.2	1116.7	939.4	778.8	719.2	267.7	272.8	247.1	203.7	169.4	138.4	114.7
67,5°	1590.2	958.6	558.5	344.6	285.8	272.4	258.6	256.3	223.6	182.9	139.3	102.3	81.7
70,0°	537.1	294.1	225.4	185.0	161.2	154.1	255.2	236.8	199.7	151.2	100.0	71.6	52.6
72,5°	165.8	135.8	113.3	93.1	80.6	77.3	268.9	225.8	168.3	106.4	67.9	42.9	32.0
75,0°	81.3	69.7	58.1	47.9	41.3	39.0	209.6	194.3	131.3	68.9	39.4	24.4	21.9
77,5°	41.1	35.1	29.8	23.1	20.4	19.4	113.2	119.8	81.1	38.2	18.0	12.0	10.3
80,0°	19.4	18.5	14.4	12.2	10.1	9.5	35.9	42.5	34.6	17.3	8.0	5.5	5.5
82,5°	9.4	8.3	6.4	5.4	4.6	4.3	5.9	6.3	6.7	4.6	3.1	2.9	2.8
85,0°	2.8	2.5	2.1	1.7	1.6	1.6	1.2	1.2	1.3	1.3	1.2	1.2	1.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi				Order number: 5XH414AA08SA EAN: 4069025512024								LP number 59800_3288		
Table of values for luminous intensities												Maximum luminous intensity		sīteco
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone	
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm		
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	0.2	0.2	
2,5°	145.4	145.3	145.0	144.9	144.8	144.7	144.6	144.6	144.7	144.9	144.9	1.8	2.0	
5,0°	142.7	142.2	141.7	141.3	140.9	140.6	140.4	140.3	140.3	140.3	140.3	3.6	5.6	
7,5°	140.6	139.6	138.8	138.1	137.6	137.0	136.8	136.6	136.6	136.5	136.5	5.4	10.9	
10,0°	139.1	138.0	136.9	136.1	135.2	134.5	133.9	133.6	133.7	133.7	133.6	7.3	18.2	
12,5°	138.7	137.3	136.1	134.9	133.7	132.7	131.9	131.5	131.4	131.8	131.8	9.3	27.5	
15,0°	140.0	138.1	136.2	134.7	133.4	132.2	131.4	131.0	130.7	130.7	130.7	11.4	38.8	
17,5°	142.5	140.2	138.4	136.2	134.2	132.2	130.6	129.3	128.7	128.6	128.8	13.4	52.3	
20,0°	144.2	141.9	140.0	137.4	135.3	133.0	131.0	129.5	128.6	128.3	128.7	15.4	67.7	
22,5°	147.1	144.0	141.1	138.8	137.2	134.9	132.7	130.9	129.7	129.2	129.8	17.5	85.2	
25,0°	150.2	146.7	143.4	140.7	138.4	136.9	134.9	132.9	131.3	130.7	131.5	19.8	105.0	
27,5°	153.7	149.7	146.2	143.2	140.7	139.1	137.1	135.3	133.7	132.7	133.4	22.2	127.1	
30,0°	157.3	153.1	149.3	146.2	143.5	141.8	140.3	138.2	136.7	135.6	136.0	24.6	151.7	
32,5°	162.1	157.6	154.1	150.9	147.7	146.0	144.9	142.3	140.4	139.2	139.3	27.1	178.9	
35,0°	169.0	164.0	160.6	157.1	153.9	151.5	149.5	147.5	145.4	144.5	145.2	29.8	208.7	
37,5°	178.8	171.9	168.3	164.4	160.7	157.8	155.9	154.3	152.1	150.8	152.0	32.6	241.2	
40,0°	185.7	181.5	176.5	172.6	168.7	165.3	163.3	161.4	159.8	158.8	159.4	35.4	276.7	
42,5°	193.6	188.5	185.1	180.2	176.1	172.4	170.4	169.0	167.7	167.1	167.0	38.3	315.0	
45,0°	200.4	194.5	191.9	186.5	182.4	178.5	176.3	175.0	173.8	173.2	172.7	41.1	356.1	
47,5°	205.3	199.5	194.5	190.9	185.5	182.2	179.7	176.1	172.4	170.3	168.9	43.6	399.7	
50,0°	208.4	201.3	194.6	191.6	184.2	173.6	162.9	154.0	148.2	146.2	145.4	44.8	444.5	
52,5°	206.4	199.4	191.9	178.7	162.3	145.0	134.4	128.6	126.0	125.2	126.9	45.3	489.8	
55,0°	200.5	191.0	170.8	149.3	134.4	119.4	111.2	108.0	106.6	106.9	113.6	45.5	535.3	
57,5°	187.9	163.3	140.7	121.7	106.4	96.3	91.1	91.9	92.2	90.7	95.9	46.2	581.5	
60,0°	156.2	131.6	111.6	93.4	83.4	80.7	81.0	81.4	81.8	83.6	91.0	54.7	636.2	
62,5°	122.4	100.3	81.4	71.0	71.2	74.7	75.5	76.2	75.9	78.9	84.8	71.9	708.1	
65,0°	91.4	71.9	62.2	62.1	67.3	71.5	71.2	69.9	68.0	76.5	82.1	98.8	806.9	
67,5°	61.6	55.3	53.3	60.0	66.6	67.6	64.6	59.9	41.5	39.8	50.4	92.9	899.8	
70,0°	41.4	43.0	52.6	58.9	58.4	53.9	42.9	19.0	17.9	28.3	40.2	49.4	949.3	
72,5°	31.6	38.8	44.5	44.5	38.5	31.6	16.1	14.2	13.4	20.8	26.1	24.8	974.0	
75,0°	25.4	29.3	31.2	27.4	22.3	15.1	12.2	10.5	9.6	12.1	13.2	14.0	988.0	
77,5°	11.8	16.6	15.7	12.8	11.4	9.8	8.8	7.0	5.7	5.6	6.5	7.1	995.1	
80,0°	5.8	6.3	6.9	6.8	6.3	5.8	5.2	4.0	2.9	1.7	1.4	3.1	998.2	
82,5°	3.0	3.3	3.5	3.5	3.8	3.3	2.9	2.2	1.7	1.3	1.1	1.2	999.4	
85,0°	1.3	1.4	1.5	1.5	1.5	1.5	1.4	1.3	1.1	1.0	1.0	0.4	999.8	
87,5°	0.8	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.2	1000.0	
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0	

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 maxi	Order number: 5XH414AA08SA EAN: 4069025512024	LP number 59800_3288
Dimming levels table		environmental temperature: 25°C
		sitEco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	29470	208.6	233.1	220.8
95	237	251	28009	193.8	216.4	205.1
90	221	249	26569	180.1	201.0	190.6
85	205	246	25057	166.6	185.7	176.1
80	190	243	23584	153.9	171.5	162.7
75	175	240	22051	141.6	157.5	149.6
70	161	237	20580	130.0	144.6	137.3
65	148	234	19157	119.5	132.7	126.1
60	135	231	17701	108.9	120.9	114.9
55	122	227	16199	98.5	109.3	103.9
50	110	223	14774	88.8	98.5	93.6
45	98	219	13314	79.3	87.9	83.6
40	86	214	11824	69.9	77.3	73.6
35	74	209	10294	60.4	66.8	63.6
30	63	203	8863	52.1	57.3	54.7
25	52	196	7405	43.9	48.1	46.0
20	41	187	5914	35.6	39.0	37.3
15	30	176	4396	27.5	30.0	28.8
12	23	166	3414	22.3	24.2	23.2

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	30500	210.9	235.5	223.2
95	238	252	29015	196.9	219.7	208.3
90	222	249	27471	183.0	204.2	193.6
85	207	247	25971	170.3	189.8	180.0
80	192	244	24418	157.5	175.5	166.5
75	178	241	22925	145.8	162.3	154.0
70	164	238	21387	134.2	149.2	141.7
65	150	235	19806	122.6	136.3	129.4
60	137	231	18305	112.0	124.3	118.2
55	124	228	16754	101.4	112.5	107.0
50	112	224	15290	91.7	101.6	96.6
45	99	219	13669	81.2	90.1	85.6
40	87	215	12143	71.6	79.3	75.4
35	76	210	10711	62.9	69.6	66.2
30	64	204	9125	53.6	59.0	56.3
25	53	197	7642	45.2	49.6	47.4
20	42	188	6127	37.0	40.5	38.8
15	31	177	4589	28.6	31.2	29.9
11	23	166	3453	22.6	24.5	23.6

Photometric test report

Family Streetlight 31 maxi	Order number: 5XH414AA08SA EAN: 4069025512024	LP number 59800_3288
-------------------------------	--	-------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	30020	209.7	234.2	222.0
95	237	251	28497	194.9	217.6	206.2
90	221	249	27001	181.1	202.1	191.6
85	206	246	25538	168.3	187.8	178.0
80	191	244	24023	155.7	173.5	164.6
75	177	241	22561	144.1	160.4	152.2
70	163	238	21055	132.5	147.4	140.0
65	149	234	19498	121.0	134.5	127.8
60	136	231	18017	110.4	122.6	116.5
55	123	227	16490	99.9	110.9	105.4
50	111	224	15044	90.2	100.1	95.2
45	99	219	13565	80.6	89.4	85.0
40	87	215	12056	71.1	78.7	74.9
35	75	209	10510	61.7	68.2	65.0
30	64	204	9068	53.2	58.6	55.9
25	52	196	7461	44.2	48.5	46.4
20	41	187	5956	35.9	39.3	37.6
15	31	177	4565	28.4	31.0	29.7
11	23	166	3436	22.4	24.3	23.4

Photometric test report

Family Streetlight 31 maxi	Order number: 5XH414AA08SA EAN: 4069025512024	LP number 59800_3288
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	29470.0	208.6
5.0	30500.0	210.9
15.0	30020.0	209.7