

Photometric test report

Family
Streetlight 31 maxi toolless



Order number: 5XH814AA08TA
EAN: 4069025514240

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting

asymmetric distribution (PL32G)

toughened safety glass

LED 4000 K | CRI ≥ 70


ECG SITECO

Net luminous flux = 33340 lm
Power consumption = 217.7 W
Luminous efficacy = 153.1 lm/W

LP number
59798_2252

serial
documentation
26.08.2025


siteco

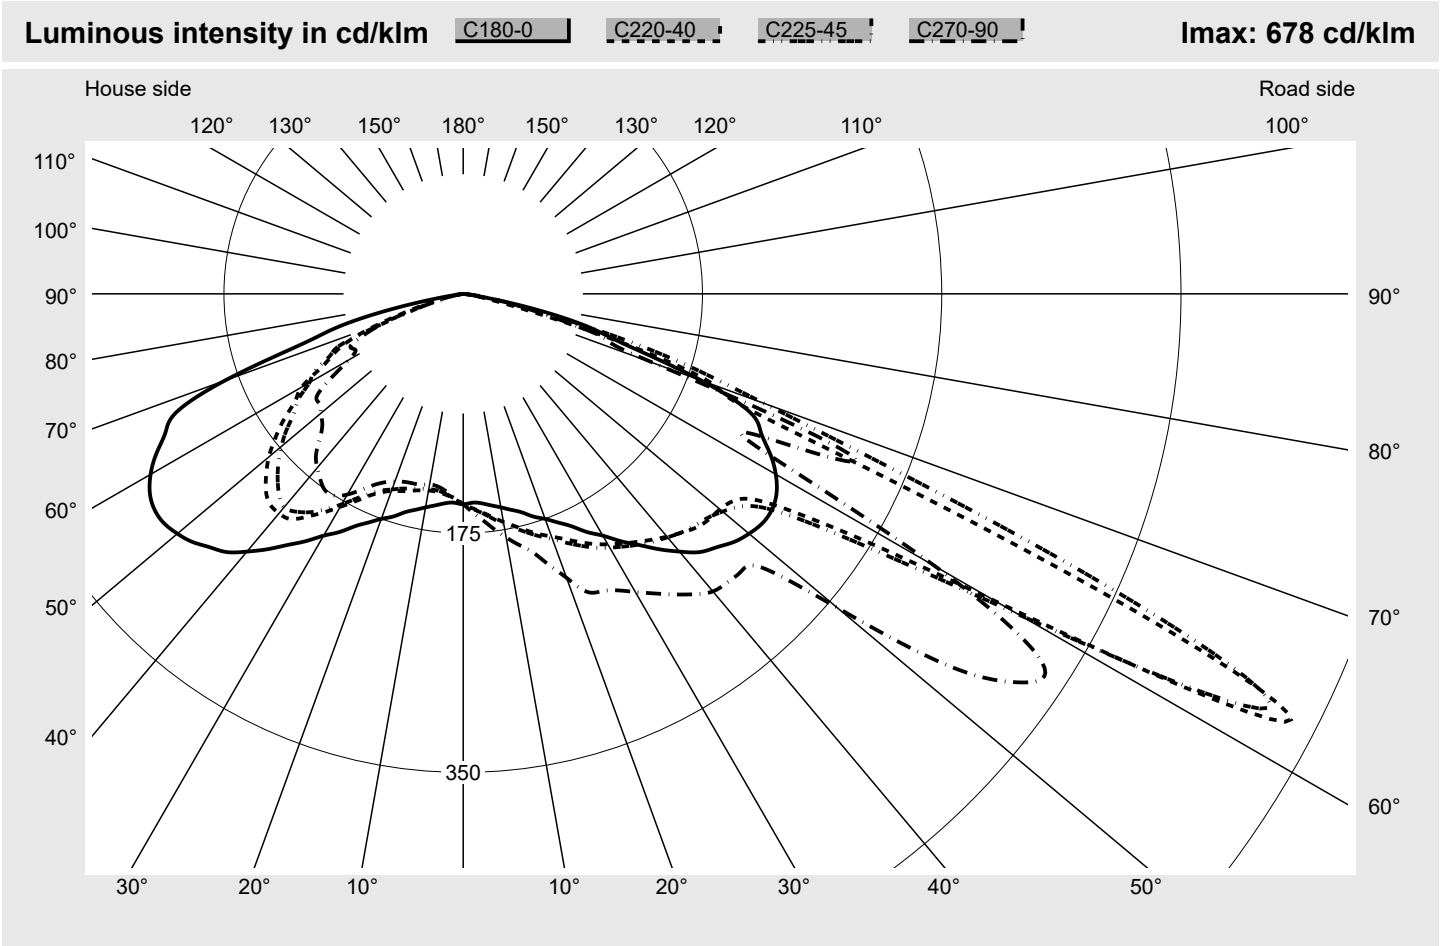

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	623.9
Eta 90° - 180°	0.0%	Imax 80°	57.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
Envelope curve in cd/klm KMK 62.5° KMK 60° KMK 57.5° KMK 55°		sit eco

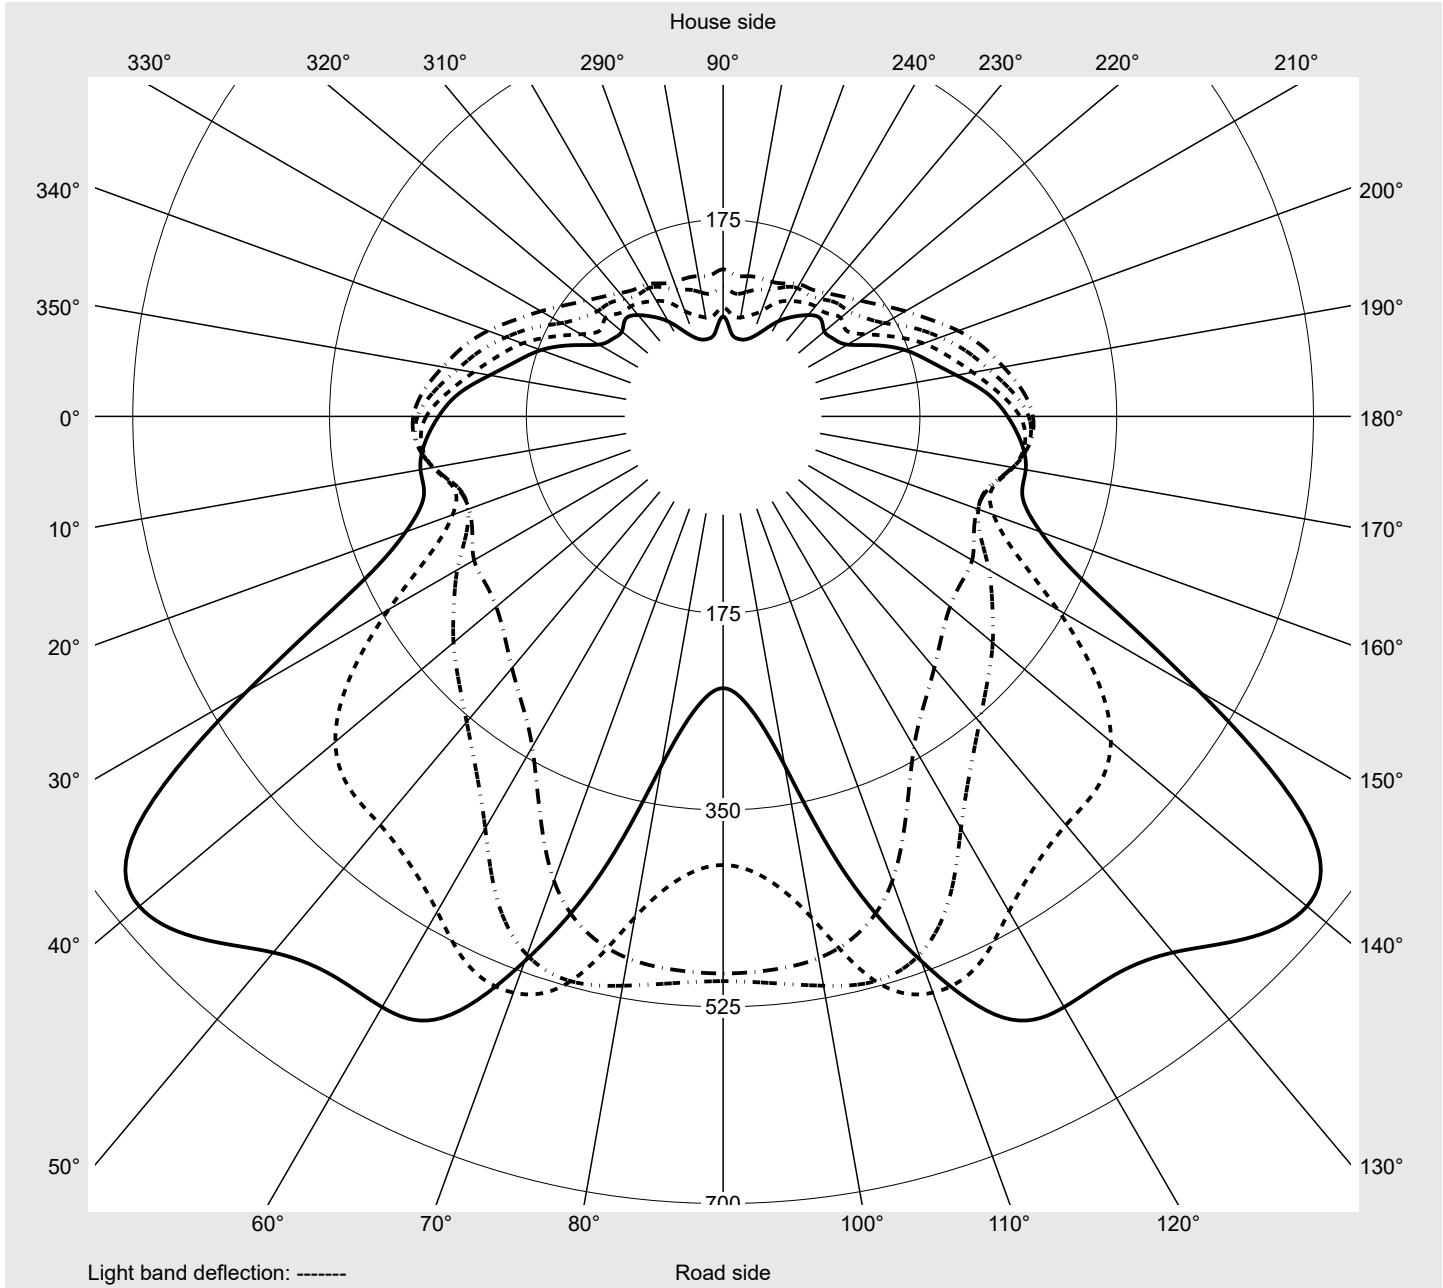

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	152.9	153.3	153.8	154.4	154.9	155.4	156.0	156.5	157.0	157.5	157.9	158.3	158.7
5,0°	153.8	154.6	155.4	156.5	157.5	158.3	158.9	159.7	160.5	161.0	161.6	162.2	162.9
7,5°	156.0	157.1	158.0	159.2	160.3	161.4	162.4	163.6	164.7	165.8	166.8	167.8	168.6
10,0°	158.6	159.8	160.7	162.1	163.6	165.0	166.3	167.8	169.4	170.8	172.3	173.6	174.7
12,5°	161.8	162.9	164.3	166.1	167.9	169.6	171.0	172.5	174.0	175.6	177.3	178.9	180.3
15,0°	165.4	166.9	168.3	170.4	172.5	174.3	176.0	177.5	179.2	180.7	182.1	184.2	186.5
17,5°	170.8	172.0	173.2	175.2	177.0	179.0	180.8	182.5	184.2	185.9	187.6	189.5	193.3
20,0°	175.2	177.6	179.4	180.6	182.3	183.8	185.4	187.0	188.9	190.8	193.3	195.6	198.8
22,5°	181.0	183.3	185.4	187.4	188.4	189.3	190.5	192.0	194.2	197.0	200.2	203.5	206.3
25,0°	187.6	190.1	191.6	193.7	195.1	195.1	195.8	197.7	200.2	203.2	206.9	210.2	213.0
27,5°	196.4	198.0	199.0	200.0	201.5	201.5	201.7	203.7	206.2	209.3	212.5	215.7	218.7
30,0°	204.2	206.2	206.7	206.7	207.3	207.7	207.4	209.4	211.5	214.4	217.0	219.4	222.1
32,5°	214.5	215.1	214.9	213.5	212.7	212.7	212.5	214.6	216.5	219.1	221.3	223.8	226.6
35,0°	224.3	224.9	223.5	220.7	217.8	217.6	217.3	220.0	221.5	223.9	226.4	229.1	232.2
37,5°	235.5	234.4	231.5	226.7	222.7	222.0	221.6	224.9	226.7	228.3	230.7	233.9	237.1
40,0°	246.1	244.1	238.9	231.2	227.0	225.6	225.6	229.6	231.8	232.5	234.7	237.4	240.3
42,5°	256.1	251.5	243.7	234.8	230.4	228.4	229.6	234.7	236.8	236.6	237.3	239.0	242.2
45,0°	262.1	258.4	248.9	238.5	233.4	230.6	232.6	238.8	241.5	239.6	239.3	241.4	245.8
47,5°	268.6	264.5	253.2	241.5	235.7	233.5	235.8	240.9	243.9	242.5	242.8	246.1	252.5
50,0°	272.9	269.4	256.7	243.7	237.1	236.9	240.1	244.1	245.1	247.7	250.1	255.0	265.8
52,5°	275.7	272.4	259.2	245.1	239.2	241.2	245.9	248.1	248.9	255.6	263.8	274.7	290.4
55,0°	275.5	273.8	261.2	245.1	240.6	246.1	255.7	258.3	263.4	275.1	292.1	311.9	339.5
57,5°	271.7	273.1	261.7	244.1	241.5	252.6	273.0	292.3	313.0	332.6	354.8	383.3	423.1
60,0°	264.0	269.5	261.9	247.8	256.0	286.6	343.4	405.3	450.2	469.1	474.4	485.9	508.4
62,5°	253.0	266.1	273.3	275.7	300.5	360.4	488.8	635.9	677.8	656.9	622.4	606.6	606.6
65,0°	240.3	274.2	286.5	273.7	264.1	275.7	311.3	384.1	511.5	564.9	556.9	590.7	600.5
67,5°	227.7	249.1	236.1	196.9	168.4	167.8	182.1	207.7	249.4	360.6	503.8	535.0	349.3
70,0°	185.7	185.4	184.1	169.0	150.8	152.0	157.7	172.3	195.9	234.0	284.0	366.9	498.5
72,5°	126.9	155.2	171.0	150.9	111.5	93.7	90.0	103.8	134.0	166.6	192.6	201.1	236.6
75,0°	96.9	117.8	119.7	83.1	44.1	31.7	30.5	39.5	61.7	98.4	139.1	154.4	150.9
77,5°	60.5	54.0	41.1	25.1	13.3	11.4	11.3	14.3	24.0	44.4	79.4	107.8	98.4
80,0°	22.7	9.2	5.9	6.4	6.7	6.7	6.6	7.4	10.8	16.5	36.0	55.9	57.0
82,5°	4.1	2.8	3.0	3.2	3.4	3.5	3.5	3.8	4.8	7.4	13.0	24.0	27.7
85,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	2.0	2.7	5.0	6.9
87,5°	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	159.1	159.4	159.7	159.8	159.9	160.0	152.4	151.8	151.6	151.3	150.9	150.6	150.4
5,0°	163.7	164.5	165.1	165.6	166.1	166.3	152.8	151.7	150.9	150.3	149.5	148.7	148.0
7,5°	169.4	170.2	171.2	172.3	173.2	173.6	154.4	152.8	151.7	150.4	149.3	148.1	147.1
10,0°	175.5	176.3	177.2	178.7	180.2	180.9	156.5	154.6	153.1	151.7	150.1	148.7	147.4
12,5°	181.6	182.5	183.3	184.9	187.0	188.0	159.7	157.3	155.6	153.7	152.0	150.4	148.5
15,0°	188.7	190.7	191.4	192.4	194.5	195.4	163.4	160.8	158.9	156.9	154.7	152.7	150.9
17,5°	198.0	202.0	204.3	204.2	206.1	207.7	168.2	165.4	162.6	160.0	157.6	155.4	153.3
20,0°	206.1	212.8	217.8	217.6	218.8	221.0	172.1	169.3	166.3	163.1	160.2	157.5	155.2
22,5°	211.5	220.9	227.4	228.6	229.6	235.8	177.3	174.5	171.9	168.2	164.7	161.6	159.2
25,0°	216.0	224.8	231.2	232.8	233.2	240.0	184.4	180.8	178.1	174.8	170.8	167.5	165.0
27,5°	220.8	226.8	232.8	234.6	234.6	244.5	192.9	189.3	185.7	183.1	179.7	176.3	173.6
30,0°	224.8	229.3	236.4	238.7	238.5	251.8	201.8	198.4	194.5	190.6	188.8	185.4	182.4
32,5°	229.5	233.4	241.7	245.6	245.0	259.8	211.7	208.7	205.0	201.0	197.7	196.5	192.8
35,0°	234.9	238.7	246.3	252.1	252.4	268.4	222.9	220.0	216.2	212.5	208.5	205.4	204.0
37,5°	240.1	243.6	251.3	261.6	263.1	277.0	234.2	231.2	227.2	223.4	219.2	215.1	210.2
40,0°	243.8	247.9	256.6	273.9	278.8	284.1	245.3	242.2	237.9	233.5	228.7	223.0	216.7
42,5°	246.4	252.9	262.7	285.1	288.5	286.1	255.1	251.8	247.3	241.9	235.3	227.8	219.2
45,0°	251.6	260.7	270.1	282.6	289.1	287.3	261.5	259.0	254.5	247.6	239.1	229.2	216.9
47,5°	261.0	273.6	281.2	289.3	296.3	296.3	266.6	262.3	257.3	249.7	238.9	225.6	210.4
50,0°	279.0	298.4	311.8	330.3	349.0	357.1	270.0	263.8	255.6	246.5	233.4	217.1	200.4
52,5°	315.1	351.1	385.6	420.3	441.3	446.2	270.7	260.9	250.0	237.0	221.3	205.0	187.3
55,0°	386.3	439.7	473.6	489.2	494.1	495.4	267.0	253.2	239.2	222.5	203.6	187.1	172.2
57,5°	474.9	509.7	520.2	514.1	506.0	502.2	257.7	240.1	224.0	205.6	186.4	165.9	153.3
60,0°	537.7	545.3	519.2	452.5	411.2	399.0	245.7	225.6	207.2	189.8	167.7	146.1	133.5
62,5°	590.0	515.5	421.5	315.3	258.8	241.7	235.6	210.7	189.9	172.3	149.6	127.7	120.1
65,0°	483.5	302.1	187.1	194.0	243.5	258.9	209.5	187.8	172.2	155.2	131.6	112.6	104.5
67,5°	189.2	219.9	403.6	398.0	335.1	304.9	192.4	159.6	147.1	135.6	113.1	96.5	91.2
70,0°	623.9	488.5	293.6	190.4	158.1	150.3	173.4	146.1	127.2	114.7	96.8	80.7	75.9
72,5°	266.8	208.4	157.0	131.3	114.1	109.4	118.5	122.0	114.7	96.9	76.6	64.1	54.6
75,0°	143.3	125.1	104.9	89.5	77.5	73.1	62.5	68.5	86.0	79.6	61.7	45.1	32.8
77,5°	87.4	73.2	61.5	52.2	46.1	43.5	37.1	27.9	43.3	49.7	37.5	21.9	11.8
80,0°	48.8	40.2	34.1	29.5	25.5	23.9	17.2	9.9	14.2	20.5	16.7	6.9	6.2
82,5°	23.2	19.1	15.7	13.5	11.6	10.9	3.9	3.1	3.7	4.7	4.1	3.1	3.1
85,0°	7.4	6.0	4.9	4.0	3.5	3.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
87,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless		Order number: 5XH814AA08TA EAN: 4069025514240										LP number 59798_2252	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	0.2	0.2
2,5°	150.1	149.8	149.7	149.6	149.4	149.3	149.3	149.3	149.3	149.4	149.4	1.8	2.1
5,0°	147.4	146.7	146.1	145.7	145.4	145.0	144.8	144.8	144.8	144.9	144.9	3.7	5.8
7,5°	146.1	145.0	144.3	143.6	143.0	142.5	142.1	142.1	142.1	142.2	142.1	5.6	11.3
10,0°	146.1	145.0	143.9	143.2	142.4	141.8	141.3	141.2	141.3	141.4	141.5	7.5	18.9
12,5°	147.1	145.9	144.8	143.9	143.2	142.7	142.5	142.6	142.8	142.9	143.0	9.6	28.5
15,0°	149.1	147.5	146.3	145.0	144.1	143.4	142.9	142.9	143.0	143.3	143.4	11.7	40.2
17,5°	151.3	149.3	147.8	147.0	146.1	145.1	144.5	144.0	143.9	143.9	144.2	14.0	54.2
20,0°	153.3	152.2	151.1	150.0	149.0	148.1	147.2	146.4	145.9	145.8	146.1	16.4	70.7
22,5°	157.3	155.7	154.9	154.3	153.1	152.0	150.8	149.8	149.0	148.7	149.1	19.0	89.6
25,0°	162.9	161.3	160.4	159.5	158.9	157.6	156.3	155.0	154.1	153.6	154.2	21.6	111.3
27,5°	171.1	168.6	168.0	167.0	166.0	165.1	163.7	162.7	161.7	161.1	161.6	24.4	135.7
30,0°	179.9	177.7	176.3	175.3	174.1	172.9	171.9	170.8	169.7	169.1	169.5	27.4	163.1
32,5°	189.5	186.7	185.2	183.1	181.4	180.1	179.0	177.4	176.0	175.1	175.0	30.5	193.6
35,0°	198.9	194.9	192.0	189.5	186.2	183.6	181.9	179.0	176.9	175.6	175.8	33.6	227.2
37,5°	207.6	200.8	196.1	191.4	185.8	181.2	178.5	175.5	173.1	171.7	171.5	36.5	263.8
40,0°	209.5	203.8	195.1	187.8	180.7	175.2	171.9	169.1	166.9	165.8	166.0	39.3	303.0
42,5°	209.0	199.4	190.8	181.1	173.4	167.7	164.3	161.7	159.7	159.1	159.3	41.7	344.7
45,0°	204.0	191.9	183.0	172.6	165.1	159.6	156.3	152.5	149.3	147.7	147.8	43.7	388.4
47,5°	195.4	183.3	173.3	165.6	156.8	149.0	143.9	140.5	138.4	138.2	139.8	45.6	434.0
50,0°	185.6	173.6	164.0	154.2	144.2	138.5	137.0	136.0	134.9	134.8	136.0	48.2	482.2
52,5°	173.2	162.6	152.2	141.9	140.0	135.1	132.1	130.8	129.2	128.9	132.2	52.1	534.3
55,0°	160.0	150.6	143.1	137.8	135.7	130.5	127.3	127.3	126.6	126.0	130.8	56.4	590.7
57,5°	145.7	142.6	136.2	132.0	131.8	126.7	119.8	116.6	111.9	110.1	114.6	60.7	651.4
60,0°	136.4	129.9	127.7	123.8	118.6	111.3	99.7	93.1	89.3	90.6	96.7	65.1	716.5
62,5°	117.5	122.6	117.6	108.0	97.4	84.2	74.8	70.7	70.4	75.9	88.8	70.5	787.0
65,0°	105.1	107.7	103.0	86.6	70.4	62.2	58.9	58.0	57.6	65.6	91.0	59.1	846.2
67,5°	91.4	95.9	78.9	58.2	51.3	50.5	50.5	45.2	40.7	48.6	78.6	48.7	894.8
70,0°	68.4	57.8	51.5	42.6	42.2	44.3	38.5	25.7	21.0	30.1	60.3	43.2	938.0
72,5°	43.3	34.9	32.5	34.1	37.1	35.6	20.9	16.3	17.0	20.4	34.9	27.8	965.8
75,0°	25.0	22.6	25.6	29.5	28.0	20.4	14.3	12.0	11.5	12.4	17.2	17.6	983.3
77,5°	11.6	14.3	17.1	18.0	15.2	11.7	10.3	8.3	6.8	6.6	10.8	9.5	992.9
80,0°	6.5	7.0	8.1	8.5	8.0	7.4	6.3	4.9	3.3	2.0	1.6	4.4	997.3
82,5°	3.3	3.6	4.1	4.1	4.3	4.1	3.3	2.5	1.9	1.2	1.0	1.9	999.2
85,0°	1.4	1.5	1.6	1.6	1.7	1.7	1.5	1.3	1.0	0.9	0.9	0.6	999.8
87,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
Dimming levels table		environmental temperature: 25°C

sitEco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	33340	217.7	235.3	226.5
95	239	252	31674	204.5	220.9	212.7
90	224	249	29958	191.0	207.4	199.2
85	210	247	28313	179.0	193.2	186.1
80	196	245	26637	166.9	180.2	173.6
75	183	242	25059	155.8	167.9	161.9
70	169	239	23331	143.7	155.1	149.4
65	156	236	21695	132.7	143.0	137.8
60	143	233	20017	121.8	131.2	126.5
55	130	229	18321	111.0	119.4	115.2
50	118	226	16731	101.0	108.6	104.8
45	105	222	14978	90.1	97.0	93.6
40	93	217	13340	80.1	86.2	83.2
35	81	212	11680	70.1	75.5	72.8
30	69	206	9995	60.3	64.6	62.4
25	57	199	8290	50.7	54.2	52.4
20	46	191	6704	42.0	44.9	43.4
15	34	180	4960	32.7	34.8	33.8
10	23	166	3347	24.0	25.4	24.7
10	22	164	3198	23.3	24.6	24.0

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	34180	220.0	237.8	228.9
95	239	252	32428	206.7	223.2	215.0
90	225	250	30753	194.0	210.5	202.2
85	211	247	29036	181.9	196.4	189.2
80	197	245	27304	169.5	183.2	176.4
75	184	242	25655	158.3	170.7	164.5
70	170	239	23864	146.2	157.7	152.0
65	157	236	22177	135.2	145.6	140.4
60	144	233	20452	124.1	133.7	128.9
55	132	230	18852	113.9	122.7	118.3
50	119	226	17083	103.0	110.9	107.0
45	107	222	15429	93.0	99.9	96.4
40	94	218	13620	81.9	88.2	85.1
35	82	213	11930	71.8	77.3	74.6
30	70	207	10217	61.8	66.4	64.1
25	58	200	8495	52.1	55.7	53.9
20	47	192	6892	43.4	46.3	44.8
15	35	181	5132	33.9	36.1	35.0
10	23	166	3360	24.3	25.8	25.0
9	22	164	3211	23.6	24.9	24.2

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
Dimming levels table		environmental temperature: 15°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	33790	218.8	236.5	227.6
95	239	252	32081	205.6	222.0	213.8
90	225	250	30442	193.0	209.4	201.2
85	211	247	28761	180.9	195.3	188.1
80	197	245	27062	168.6	182.1	175.4
75	183	242	25320	156.6	168.8	162.7
70	170	239	23682	145.4	156.8	151.1
65	157	236	22020	134.4	144.8	139.6
60	144	233	20321	123.4	132.9	128.2
55	131	230	18606	112.4	121.0	116.7
50	118	226	16855	101.6	109.2	105.4
45	106	222	15218	91.6	98.3	94.9
40	94	218	13564	81.4	87.6	84.5
35	82	213	11888	71.3	76.8	74.0
30	70	207	10188	61.4	65.9	63.6
25	58	200	8475	51.8	55.4	53.6
20	46	191	6732	42.3	45.2	43.8
15	35	181	5126	33.7	35.8	34.8
10	23	166	3357	24.2	25.6	24.9
9	22	164	3209	23.4	24.8	24.1

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AA08TA EAN: 4069025514240	LP number 59798_2252
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	33340.0	217.7
5.0	34180.0	220.0
15.0	33790.0	218.8