

Photometric test report

Family

Streetlight 31 maxi toolless



Order number: 5XH814AT08TA

EAN: 4069025514288

LP number

59798_2337

Version

post-top or side-entry mounting, Smart Interface up/down

Optic

asymmetric distribution (PL32G)

Cover

toughened safety glass

Lamps

LED 4000 K | CRI ≥ 70

Controlgear

ECG SITECO - Smart Interface


Rated values

Net luminous flux = 34660 lm
Power consumption = 228.8 W
Luminous efficacy = 151.5 lm/W

serial documentation

26.08.2025

siteco

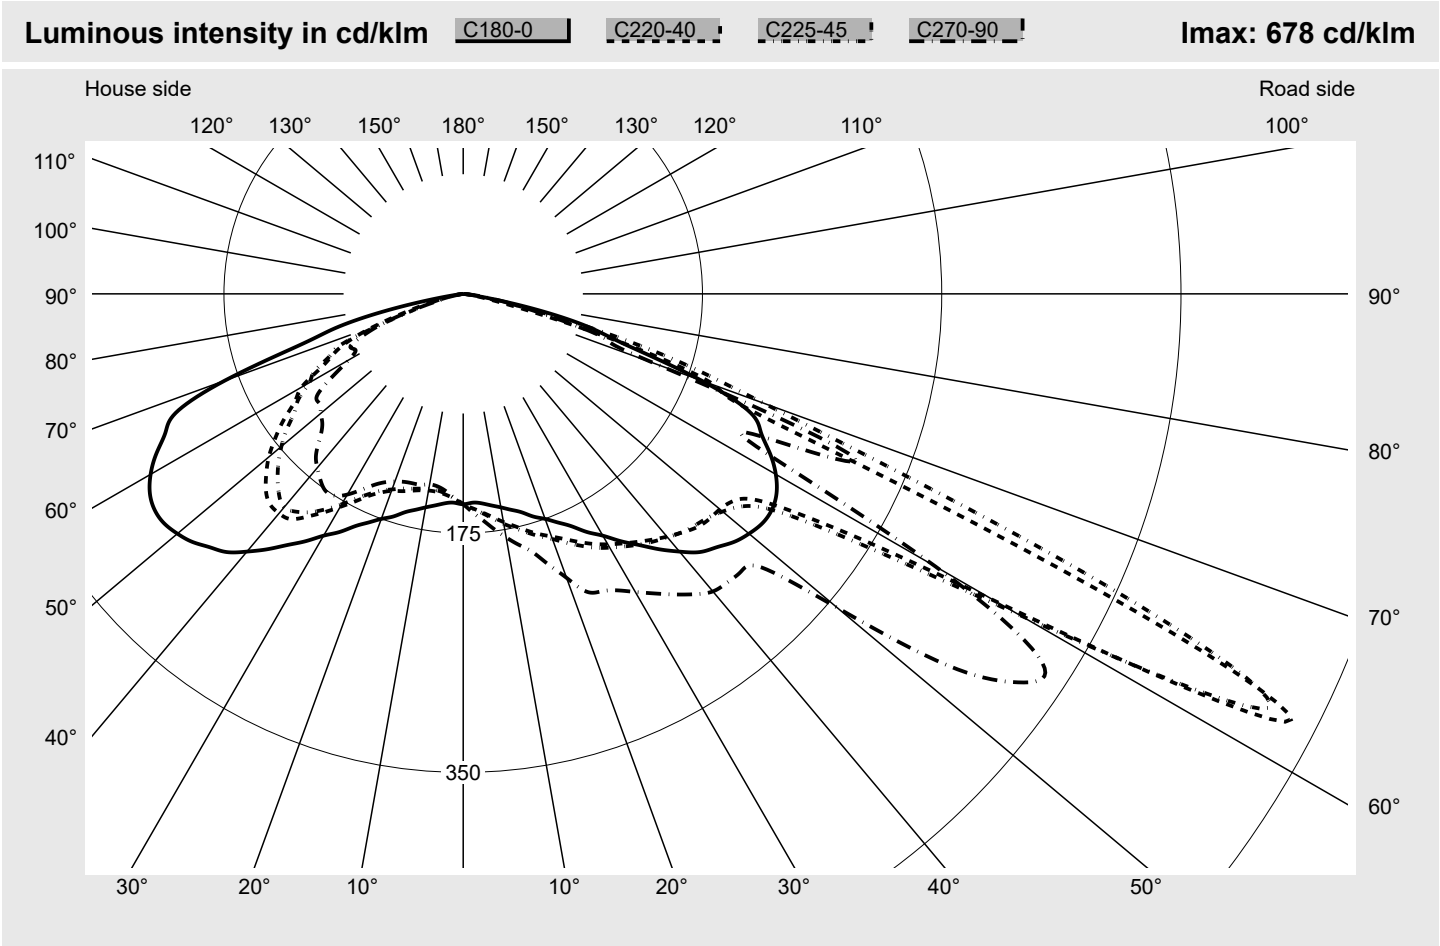


Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	623.9
Eta 90° - 180°	0.0%	Imax 80°	57.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
Envelope curve in cd/klm		KMK 62.5° KMK 60° KMK 57.5° KMK 55°

siteco

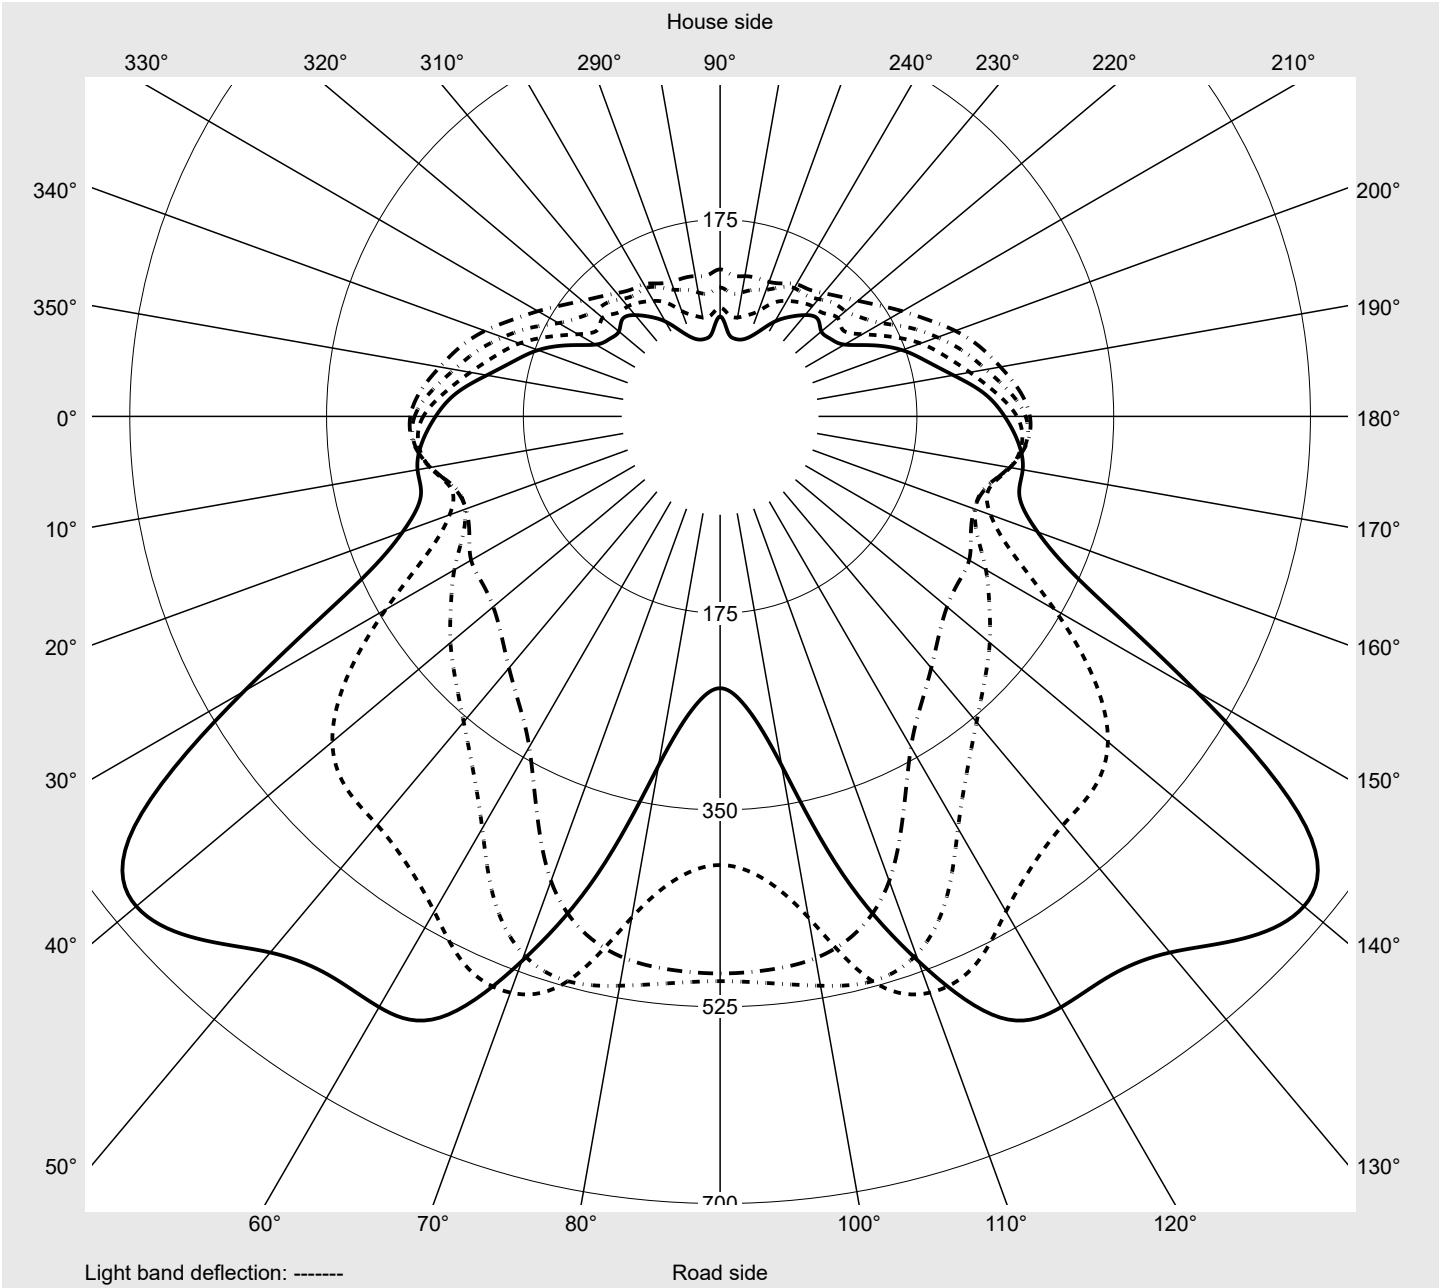

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	152.9	153.3	153.8	154.4	154.9	155.4	156.0	156.5	157.0	157.5	157.9	158.3	158.7
5,0°	153.8	154.6	155.4	156.5	157.5	158.3	158.9	159.7	160.5	161.0	161.6	162.2	162.9
7,5°	156.0	157.1	158.0	159.2	160.3	161.4	162.4	163.6	164.7	165.8	166.8	167.8	168.6
10,0°	158.6	159.8	160.7	162.1	163.6	165.0	166.3	167.8	169.4	170.8	172.3	173.6	174.7
12,5°	161.8	162.9	164.3	166.1	167.9	169.6	171.0	172.5	174.0	175.6	177.3	178.9	180.3
15,0°	165.4	166.9	168.3	170.4	172.5	174.3	176.0	177.5	179.2	180.7	182.1	184.2	186.5
17,5°	170.8	172.0	173.2	175.2	177.0	179.0	180.8	182.5	184.2	185.9	187.6	189.5	193.3
20,0°	175.2	177.6	179.4	180.6	182.3	183.8	185.4	187.0	188.9	190.8	193.3	195.6	198.8
22,5°	181.0	183.3	185.4	187.4	188.4	189.3	190.5	192.0	194.2	197.0	200.2	203.5	206.3
25,0°	187.6	190.1	191.6	193.7	195.1	195.1	195.8	197.7	200.2	203.2	206.9	210.2	213.0
27,5°	196.4	198.0	199.0	200.0	201.5	201.5	201.7	203.7	206.2	209.3	212.5	215.7	218.7
30,0°	204.2	206.2	206.7	206.7	207.3	207.7	207.4	209.4	211.5	214.4	217.0	219.4	222.1
32,5°	214.5	215.1	214.9	213.5	212.7	212.7	212.5	214.6	216.5	219.1	221.3	223.8	226.6
35,0°	224.3	224.9	223.5	220.7	217.8	217.6	217.3	220.0	221.5	223.9	226.4	229.1	232.2
37,5°	235.5	234.4	231.5	226.7	222.7	222.0	221.6	224.9	226.7	228.3	230.7	233.9	237.1
40,0°	246.1	244.1	238.9	231.2	227.0	225.6	225.6	229.6	231.8	232.5	234.7	237.4	240.3
42,5°	256.1	251.5	243.7	234.8	230.4	228.4	229.6	234.7	236.8	236.6	237.3	239.0	242.2
45,0°	262.1	258.4	248.9	238.5	233.4	230.6	232.6	238.8	241.5	239.6	239.3	241.4	245.8
47,5°	268.6	264.5	253.2	241.5	235.7	233.5	235.8	240.9	243.9	242.5	242.8	246.1	252.5
50,0°	272.9	269.4	256.7	243.7	237.1	236.9	240.1	244.1	245.1	247.7	250.1	255.0	265.8
52,5°	275.7	272.4	259.2	245.1	239.2	241.2	245.9	248.1	248.9	255.6	263.8	274.7	290.4
55,0°	275.5	273.8	261.2	245.1	240.6	246.1	255.7	258.3	263.4	275.1	292.1	311.9	339.5
57,5°	271.7	273.1	261.7	244.1	241.5	252.6	273.0	292.3	313.0	332.6	354.8	383.3	423.1
60,0°	264.0	269.5	261.9	247.8	256.0	286.6	343.4	405.3	450.2	469.1	474.4	485.9	508.4
62,5°	253.0	266.1	273.3	275.7	300.5	360.4	488.8	635.9	677.8	656.9	622.4	606.6	606.6
65,0°	240.3	274.2	286.5	273.7	264.1	275.7	311.3	384.1	511.5	564.9	556.9	590.7	600.5
67,5°	227.7	249.1	236.1	196.9	168.4	167.8	182.1	207.7	249.4	360.6	503.8	535.0	349.3
70,0°	185.7	185.4	184.1	169.0	150.8	152.0	157.7	172.3	195.9	234.0	284.0	366.9	498.5
72,5°	126.9	155.2	171.0	150.9	111.5	93.7	90.0	103.8	134.0	166.6	192.6	201.1	236.6
75,0°	96.9	117.8	119.7	83.1	44.1	31.7	30.5	39.5	61.7	98.4	139.1	154.4	150.9
77,5°	60.5	54.0	41.1	25.1	13.3	11.4	11.3	14.3	24.0	44.4	79.4	107.8	98.4
80,0°	22.7	9.2	5.9	6.4	6.7	6.7	6.6	7.4	10.8	16.5	36.0	55.9	57.0
82,5°	4.1	2.8	3.0	3.2	3.4	3.5	3.5	3.8	4.8	7.4	13.0	24.0	27.7
85,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	2.0	2.7	5.0	6.9
87,5°	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	159.1	159.4	159.7	159.8	159.9	160.0	152.4	151.8	151.6	151.3	150.9	150.6	150.4
5,0°	163.7	164.5	165.1	165.6	166.1	166.3	152.8	151.7	150.9	150.3	149.5	148.7	148.0
7,5°	169.4	170.2	171.2	172.3	173.2	173.6	154.4	152.8	151.7	150.4	149.3	148.1	147.1
10,0°	175.5	176.3	177.2	178.7	180.2	180.9	156.5	154.6	153.1	151.7	150.1	148.7	147.4
12,5°	181.6	182.5	183.3	184.9	187.0	188.0	159.7	157.3	155.6	153.7	152.0	150.4	148.5
15,0°	188.7	190.7	191.4	192.4	194.5	195.4	163.4	160.8	158.9	156.9	154.7	152.7	150.9
17,5°	198.0	202.0	204.3	204.2	206.1	207.7	168.2	165.4	162.6	160.0	157.6	155.4	153.3
20,0°	206.1	212.8	217.8	217.6	218.8	221.0	172.1	169.3	166.3	163.1	160.2	157.5	155.2
22,5°	211.5	220.9	227.4	228.6	229.6	235.8	177.3	174.5	171.9	168.2	164.7	161.6	159.2
25,0°	216.0	224.8	231.2	232.8	233.2	240.0	184.4	180.8	178.1	174.8	170.8	167.5	165.0
27,5°	220.8	226.8	232.8	234.6	234.6	244.5	192.9	189.3	185.7	183.1	179.7	176.3	173.6
30,0°	224.8	229.3	236.4	238.7	238.5	251.8	201.8	198.4	194.5	190.6	188.8	185.4	182.4
32,5°	229.5	233.4	241.7	245.6	245.0	259.8	211.7	208.7	205.0	201.0	197.7	196.5	192.8
35,0°	234.9	238.7	246.3	252.1	252.4	268.4	222.9	220.0	216.2	212.5	208.5	205.4	204.0
37,5°	240.1	243.6	251.3	261.6	263.1	277.0	234.2	231.2	227.2	223.4	219.2	215.1	210.2
40,0°	243.8	247.9	256.6	273.9	278.8	284.1	245.3	242.2	237.9	233.5	228.7	223.0	216.7
42,5°	246.4	252.9	262.7	285.1	288.5	286.1	255.1	251.8	247.3	241.9	235.3	227.8	219.2
45,0°	251.6	260.7	270.1	282.6	289.1	287.3	261.5	259.0	254.5	247.6	239.1	229.2	216.9
47,5°	261.0	273.6	281.2	289.3	296.3	296.3	266.6	262.3	257.3	249.7	238.9	225.6	210.4
50,0°	279.0	298.4	311.8	330.3	349.0	357.1	270.0	263.8	255.6	246.5	233.4	217.1	200.4
52,5°	315.1	351.1	385.6	420.3	441.3	446.2	270.7	260.9	250.0	237.0	221.3	205.0	187.3
55,0°	386.3	439.7	473.6	489.2	494.1	495.4	267.0	253.2	239.2	222.5	203.6	187.1	172.2
57,5°	474.9	509.7	520.2	514.1	506.0	502.2	257.7	240.1	224.0	205.6	186.4	165.9	153.3
60,0°	537.7	545.3	519.2	452.5	411.2	399.0	245.7	225.6	207.2	189.8	167.7	146.1	133.5
62,5°	590.0	515.5	421.5	315.3	258.8	241.7	235.6	210.7	189.9	172.3	149.6	127.7	120.1
65,0°	483.5	302.1	187.1	194.0	243.5	258.9	209.5	187.8	172.2	155.2	131.6	112.6	104.5
67,5°	189.2	219.9	403.6	398.0	335.1	304.9	192.4	159.6	147.1	135.6	113.1	96.5	91.2
70,0°	623.9	488.5	293.6	190.4	158.1	150.3	173.4	146.1	127.2	114.7	96.8	80.7	75.9
72,5°	266.8	208.4	157.0	131.3	114.1	109.4	118.5	122.0	114.7	96.9	76.6	64.1	54.6
75,0°	143.3	125.1	104.9	89.5	77.5	73.1	62.5	68.5	86.0	79.6	61.7	45.1	32.8
77,5°	87.4	73.2	61.5	52.2	46.1	43.5	37.1	27.9	43.3	49.7	37.5	21.9	11.8
80,0°	48.8	40.2	34.1	29.5	25.5	23.9	17.2	9.9	14.2	20.5	16.7	6.9	6.2
82,5°	23.2	19.1	15.7	13.5	11.6	10.9	3.9	3.1	3.7	4.7	4.1	3.1	3.1
85,0°	7.4	6.0	4.9	4.0	3.5	3.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
87,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 maxi toolless		Order number: 5XH814AT08TA EAN: 4069025514288										LP number 59798_2337	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	0.2	0.2
2,5°	150.1	149.8	149.7	149.6	149.4	149.3	149.3	149.3	149.3	149.4	149.4	1.8	2.1
5,0°	147.4	146.7	146.1	145.7	145.4	145.0	144.8	144.8	144.8	144.9	144.9	3.7	5.8
7,5°	146.1	145.0	144.3	143.6	143.0	142.5	142.1	142.1	142.1	142.2	142.1	5.6	11.3
10,0°	146.1	145.0	143.9	143.2	142.4	141.8	141.3	141.2	141.3	141.4	141.5	7.5	18.9
12,5°	147.1	145.9	144.8	143.9	143.2	142.7	142.5	142.6	142.8	142.9	143.0	9.6	28.5
15,0°	149.1	147.5	146.3	145.0	144.1	143.4	142.9	142.9	143.0	143.3	143.4	11.7	40.2
17,5°	151.3	149.3	147.8	147.0	146.1	145.1	144.5	144.0	143.9	143.9	144.2	14.0	54.2
20,0°	153.3	152.2	151.1	150.0	149.0	148.1	147.2	146.4	145.9	145.8	146.1	16.4	70.7
22,5°	157.3	155.7	154.9	154.3	153.1	152.0	150.8	149.8	149.0	148.7	149.1	19.0	89.6
25,0°	162.9	161.3	160.4	159.5	158.9	157.6	156.3	155.0	154.1	153.6	154.2	21.6	111.3
27,5°	171.1	168.6	168.0	167.0	166.0	165.1	163.7	162.7	161.7	161.1	161.6	24.4	135.7
30,0°	179.9	177.7	176.3	175.3	174.1	172.9	171.9	170.8	169.7	169.1	169.5	27.4	163.1
32,5°	189.5	186.7	185.2	183.1	181.4	180.1	179.0	177.4	176.0	175.1	175.0	30.5	193.6
35,0°	198.9	194.9	192.0	189.5	186.2	183.6	181.9	179.0	176.9	175.6	175.8	33.6	227.2
37,5°	207.6	200.8	196.1	191.4	185.8	181.2	178.5	175.5	173.1	171.7	171.5	36.5	263.8
40,0°	209.5	203.8	195.1	187.8	180.7	175.2	171.9	169.1	166.9	165.8	166.0	39.3	303.0
42,5°	209.0	199.4	190.8	181.1	173.4	167.7	164.3	161.7	159.7	159.1	159.3	41.7	344.7
45,0°	204.0	191.9	183.0	172.6	165.1	159.6	156.3	152.5	149.3	147.7	147.8	43.7	388.4
47,5°	195.4	183.3	173.3	165.6	156.8	149.0	143.9	140.5	138.4	138.2	139.8	45.6	434.0
50,0°	185.6	173.6	164.0	154.2	144.2	138.5	137.0	136.0	134.9	134.8	136.0	48.2	482.2
52,5°	173.2	162.6	152.2	141.9	140.0	135.1	132.1	130.8	129.2	128.9	132.2	52.1	534.3
55,0°	160.0	150.6	143.1	137.8	135.7	130.5	127.3	127.3	126.6	126.0	130.8	56.4	590.7
57,5°	145.7	142.6	136.2	132.0	131.8	126.7	119.8	116.6	111.9	110.1	114.6	60.7	651.4
60,0°	136.4	129.9	127.7	123.8	118.6	111.3	99.7	93.1	89.3	90.6	96.7	65.1	716.5
62,5°	117.5	122.6	117.6	108.0	97.4	84.2	74.8	70.7	70.4	75.9	88.8	70.5	787.0
65,0°	105.1	107.7	103.0	86.6	70.4	62.2	58.9	58.0	57.6	65.6	91.0	59.1	846.2
67,5°	91.4	95.9	78.9	58.2	51.3	50.5	50.5	45.2	40.7	48.6	78.6	48.7	894.8
70,0°	68.4	57.8	51.5	42.6	42.2	44.3	38.5	25.7	21.0	30.1	60.3	43.2	938.0
72,5°	43.3	34.9	32.5	34.1	37.1	35.6	20.9	16.3	17.0	20.4	34.9	27.8	965.8
75,0°	25.0	22.6	25.6	29.5	28.0	20.4	14.3	12.0	11.5	12.4	17.2	17.6	983.3
77,5°	11.6	14.3	17.1	18.0	15.2	11.7	10.3	8.3	6.8	6.6	10.8	9.5	992.9
80,0°	6.5	7.0	8.1	8.5	8.0	7.4	6.3	4.9	3.3	2.0	1.6	4.4	997.3
82,5°	3.3	3.6	4.1	4.1	4.3	4.1	3.3	2.5	1.9	1.2	1.0	1.9	999.2
85,0°	1.4	1.5	1.6	1.6	1.7	1.7	1.5	1.3	1.0	0.9	0.9	0.6	999.8
87,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	34660	228.8	248.7	238.8
95	238	252	32882	213.0	232.5	222.8
90	223	249	31148	198.8	217.1	208.0
85	210	247	29494	187.3	203.5	195.4
80	196	245	27782	174.0	189.5	181.8
75	182	242	26008	161.1	175.0	168.0
70	168	239	24222	148.2	161.1	154.6
65	155	236	22505	136.6	148.1	142.4
60	142	233	20781	124.9	135.5	130.2
55	129	229	19005	113.6	123.1	118.4
50	117	226	17354	103.3	111.7	107.5
45	104	221	15527	92.2	99.6	95.9
40	92	217	13814	82.1	88.6	85.4
35	80	212	12088	72.0	77.7	74.8
30	69	206	10462	63.0	67.7	65.4
25	57	199	8680	53.2	57.0	55.1
20	45	191	6876	43.3	46.3	44.8
15	34	180	5200	34.0	36.4	35.2
10	23	166	3511	24.5	26.1	25.3
9	21	163	3200	22.7	24.3	23.5

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	35570	231.2	251.3	241.2
95	239	252	33812	216.3	235.8	226.0
90	224	249	31980	202.0	220.0	211.0
85	211	247	30279	190.3	207.1	198.7
80	197	245	28488	176.8	192.5	184.6
75	183	242	26645	163.8	178.1	171.0
70	170	239	24925	151.8	164.9	158.4
65	157	236	23155	139.9	151.9	145.9
60	144	233	21372	128.3	139.1	133.7
55	131	230	19562	116.7	126.3	121.5
50	118	226	17724	105.4	114.0	109.7
45	106	222	16000	95.0	102.6	98.8
40	94	218	14253	84.9	91.5	88.2
35	82	213	12502	74.5	80.4	77.4
30	70	207	10699	64.7	69.5	67.1
25	58	200	8891	54.7	58.7	56.7
20	46	191	7072	44.6	47.8	46.2
15	35	181	5381	35.3	37.8	36.6
10	23	166	3525	24.8	26.5	25.6
9	21	163	3213	23.0	24.6	23.8

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	35150	229.9	250.0	240.0
95	239	252	33439	215.1	234.6	224.8
90	224	249	31650	200.9	218.9	209.9
85	210	247	29851	188.3	204.5	196.4
80	196	245	28099	174.9	190.5	182.7
75	183	242	26419	162.9	177.1	170.0
70	169	239	24598	150.0	163.0	156.5
65	156	236	22849	138.2	150.0	144.1
60	143	233	21099	126.6	137.2	131.9
55	130	229	19305	115.1	124.7	119.9
50	118	226	17630	104.7	113.3	109.0
45	105	222	15782	93.5	101.1	97.3
40	93	217	14049	83.4	90.0	86.7
35	81	212	12316	73.2	79.0	76.1
30	69	206	10519	63.4	68.2	65.8
25	57	199	8722	53.5	57.4	55.4
20	46	191	7059	44.4	47.5	46.0
15	34	180	5220	34.3	36.6	35.4
10	23	166	3522	24.6	26.3	25.5
9	21	163	3211	22.8	24.4	23.6

Photometric test report

Family Streetlight 31 maxi toolless	Order number: 5XH814AT08TA EAN: 4069025514288	LP number 59798_2337
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	34660.0	228.8
5.0	35570.0	231.2
15.0	35150.0	229.9