


Order No.: 5LZ930304 | GTIN (EAN): 4058352386040 Product description: SCon11,exp.term,swpreinst



SITECO Connect 11expansion panel, touch panel PC, central control connection to lighting or building management, installation type: recessed, installation location: in a switching cabinet, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 24V, voltage type: DC, 1 x network connector Ethernet, 2 x USB, 1 x serial interface COM1, 1 x Ethernet, software: Microsoft Windows Embedded Compact 7, packaging unit: 1 piece

IP 20 ≟ (∈

Wt. (kg): GTIN (EAN): 0.9 4058352386040



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

ѕітесо

Order No.: 5LZ930304 | GTIN (EAN): 4058352386040 Detailed technical description: SCon11,exp.term,swpreinst



Key data

- System family: Siteco Connect 11
- Product type: control unit
- Product name: SITECO Connect 11
- Order No.: 5LZ930304

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP54
- Insulation class: insulation class I
- (protective earthing) — Temperature range (operation):
- 0..+55°C
- Certification, designation: CE

Material, Colour

- Colour specification: black
- housing: metal, silver
- Colour specification: silver

Mounting

 Mounting method, mounting location: recessed, in a switching cabinet

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Length: 200mm
- Width: 150mm
- Height: 6mm
- Weight: 0.9kg

Inputs

1x network connector Ethernet

- Connection: socket RJ-45, 8P8C
- Option: connection of PC to a 10/100BASE-T network

2x USB

- Connection: plug type A

1x serial interface COM1

- Connection: RS-232

Outputs

1x Ethernet

- Connection: socket RJ-45
- It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -


Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Software

- Software: Microsoft Windows
 Embedded Compact 7
- Supplement: software pre-installed

ѕітесо

Order No.: 5LZ930304 | GTIN (EAN): 4058352386040 Dimensions: SCon11,exp.term,swpreinst

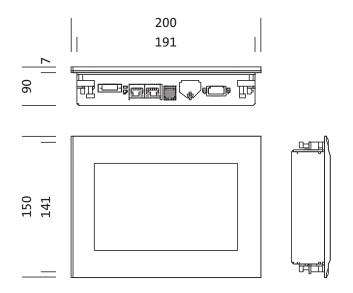

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -