


Order No.: 5TS10250Q | **GTIN (EAN):** 4039806857804


Product description: Modario, trunk.rail, 2lg, L2990, 5x2.5², wh



Modario® IP64, trunking rail, of sheet steel, galvanised, coated, pure white, 2-length, length: 2.990 mm, width: 58 mm, height: 43mm, through-wiring: 5x 2.5mm², with terminal, 5-pole, max. 2.5mm², protection rating (complete): for IP64 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 3.8
GTIN (EAN): 4039806857804

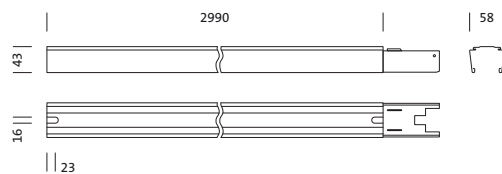


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5TS10250Q | **GTIN (EAN):** 4039806857804

Detailed technical description: Mod64,trunk.rail,2lg,L2990,5x2.5²,wh



Key data

- Product type: trunking components group (TS)
- Product name: Modario® IP64
- Order No.: 5TS10250Q

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: for electrical and mechanical plug and socket connection of rail elements

Certificates, Standards

- Protection rating: for IP64 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

Material, Colour

- trunking rail: sheet steel, galvanised, coated, pure white, 2-length
- Colour specification: pure white

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement

Electrical connection


- Connection: terminal, 5-pole, max. 2.5mm²
- Through-wiring: 5x 2.5mm²

Dimensions, Weight

- System units: 10x SE
- Length: 2990mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 3.8kg

Order No.: 5TS10250Q | **GTIN (EAN):** 4039806857804

Dimensions: Mod64, trunk.rail, 2lg, L2990, 5x2.5², wh

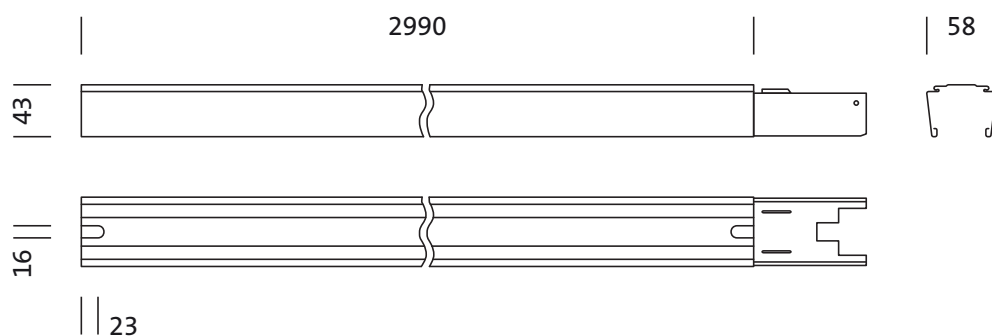

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -